Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators



IRR-AGN302



IRR-AGN603



IRR-AGN604

General Strengths

- ✓ ***Sanitation.*** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ ***Doors.*** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ ***Control systems.*** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ ***100% Tested.*** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ ***Lighting.*** LED lighting in cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.

Review:00 Date: 04/27/2026 IRR-AGN302_603_604

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____

Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AGN302 / IRR-AGN603 IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators

STANDARD FEATURES

- **Exterior**
  - AISI 304 Stainless Steel.
- **Interior**
  - AISI 304 Stainless Steel.
  - Sealed interior floors and rounded cabinet corners.
  - LED lighting.
  - Internal drain trap for easy cleaning.
- **Doors**
  - Polyurethane insulated door.
  - Self-closing door with stay open feature.
  - Stainless Steel heavy-duty hinges.
  - Triple chamber snap in door gaskets for easy removal and cleaning.
  - Field reversible door (hardware needed).
  - Full-height door opening: 23"x53" (375 x 1500 mm).

OPTIONAL FEATURES

✓ Stainless steel wire shelf.

✓ Additional slide kits.

✓ Set of 6'' legs, height adjustable from 5" to 8".

✓ Electrical connection is 230V / 1ph / 50 Hz (plug type varies).

✓ Amperes at 50 Hz:

IRR-AGN302: 1.52 A

IRR-AGN603: 1.54 A

IRR-AGN604: 1.54 A

- **Insulation**
  - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in using a high-density polyurethane insulation.
  - Low GWP & Zero ODP effect.
- **Shelving**
  - (3) Plastic-coated wire shelves single door with Stainless Steel tray slides included.
  - Tray slides are compatible with 12-51/64"x 20-55/64" (325x530 mm) sheet pans.
  - Dimensions WxD: 12-51/64"x 20-55/64" (325x530 mm).
- **Casters**
  - 4" diameter casters,
  - Locks provided on front set.
- **Refrigeration**
  - Digital temperature controller with automatic defrost system.
  - Hinged control panel, easily removable.
  - Energy-saving non-electric condensate pan.
  - Evaporator coil coated with anti-corrosion material 100% Polyester.
  - Refrigeration capacity:

    IRR-AGN302: 1510 Btu/h (14ºF) / 443 W (-10ºC)

    IRR-AGN603: 2117 Btu/h (14ºF) / 621 W (-10ºC).

    IRR-AGN604: 2117 Btu/h (14ºF) / 621 W (-10ºC).
- **Electrical**



  - Cord and NEMA 5-15P plug,
  - Electrical connection is 115 V / 1ph / 60 Hz.

MODELS	Dimensions (inches) (mm)			Doors	Shelves	Ref.	Ref.Weight (Lbs.) (gr.)	Temperature Range (ºF) (ºC)	Cond. Unit (H.P) H.P.	Capacity (Cu.Ft.)	Case Amps 115V	Net weight (Lbs.) (Kg.)
	W	D	H									
IRR-AGN302	19 (482)	27-7/8 (709)	82-1/16 (2085)	2	3	R290	0,22 (100)	28,4ºF/46,4 ºF (-2ºC/+8ºC)	1/3	11,47 (325)	3,60	253.53 (115)
IRR-AGN603	38-3/8 (974)	27-7/8 (709)	82-1/16 (2085)	3	6	R290	0,24 (110)	28,4ºF/46,4 ºF (-2ºC/+8ºC)	3/8	26,31 (745)	4,85	302.03 (137)
IRR-AGN604	38-3/8 (974)	27-7/8 (709)	82-1/16 (2085)	4	6	R290	0,24 (110)	28,4ºF/46,4 ºF (-2ºC/+8ºC)	3/8	26,31 (745)	4,85	315.26 (143)

Review:00 Date: 04/27/2026 IRR-AGN302_603_604

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate Division
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____

MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators

ELEVATION	RIGHT VIEW	PLAN VIEW

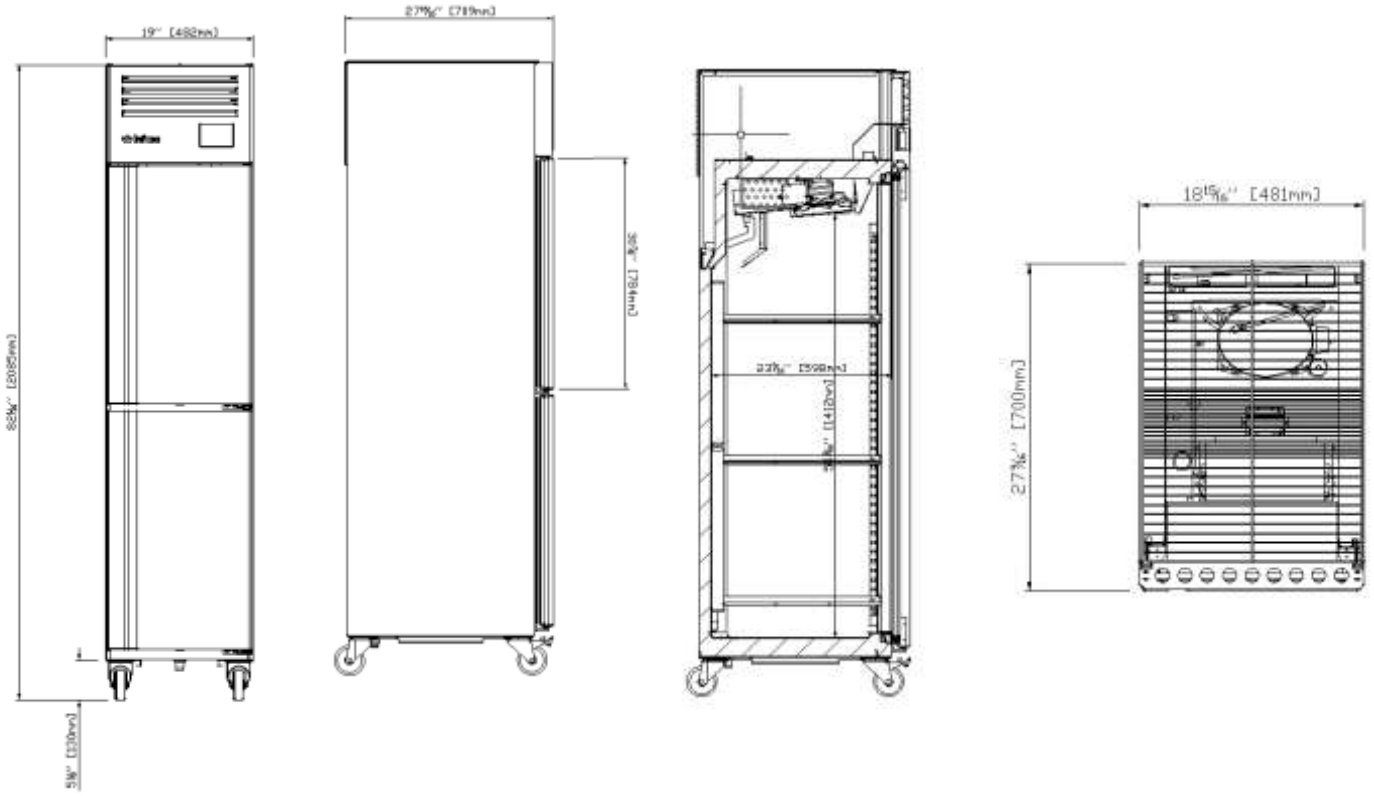

IRR-AGN302

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____


MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators

ELEVATION

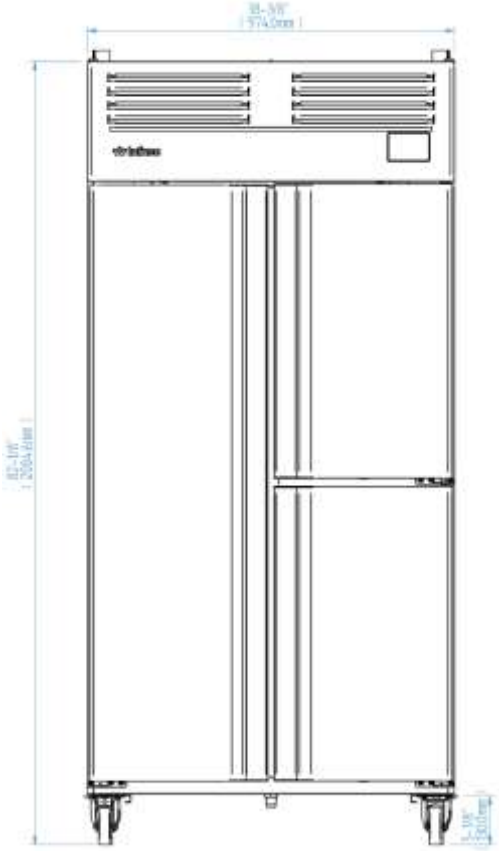


RIGHT VIEW

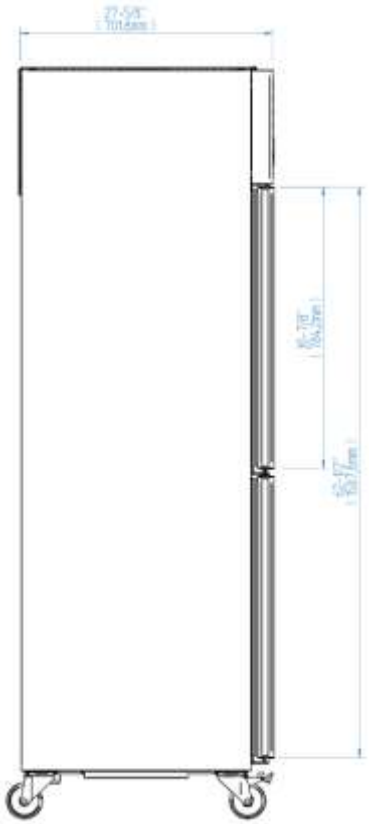

IRR-AGN603

PLAN VIEW

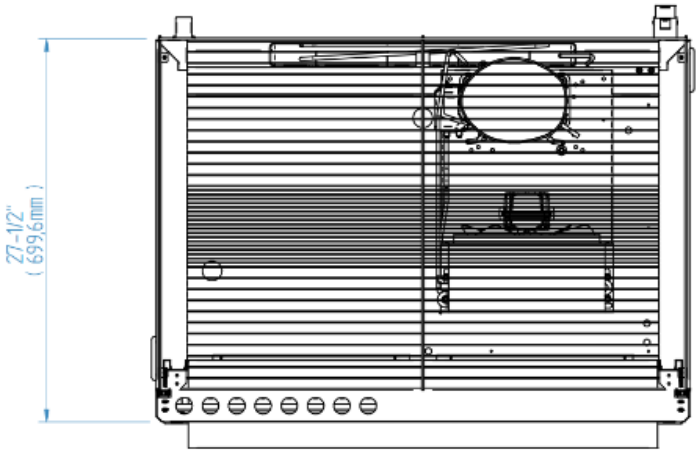

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com

Project:_____

Location:_____


Item #:_____Quantity:_____

Model #:_____


MODEL: IRR-AGN302 / IRR-AGN603
IRR-AGN604

REACH-IN:
Slimline Reach-in Refrigerators

ELEVATION

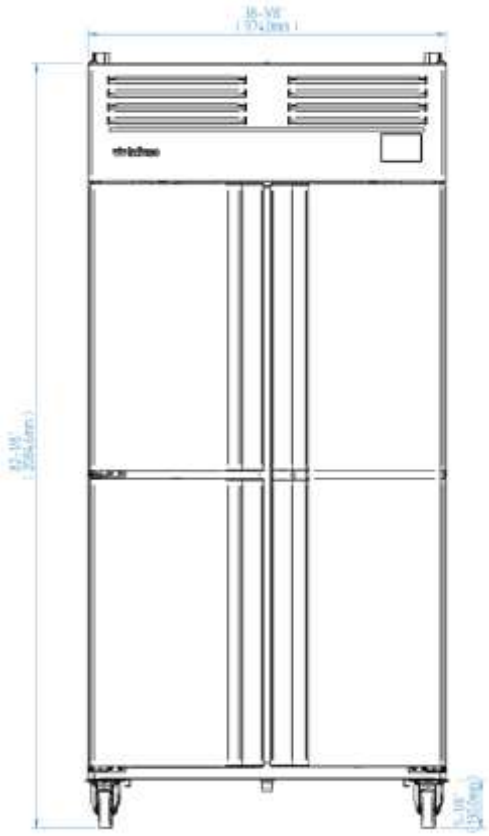


RIGHT VIEW

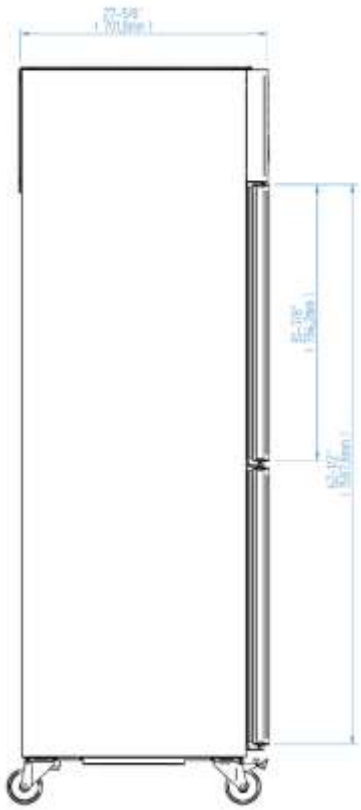

RR-AGN604

PLAN VIEW

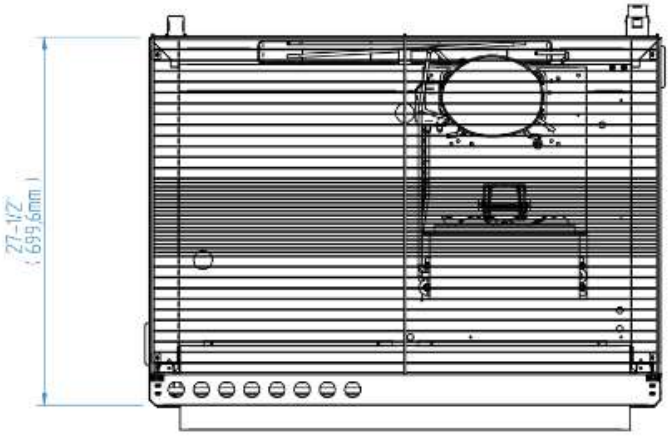

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

INFRICO-North America Corporate División
11200NW 25th St ste 123, Sweetwater. FL, 33172
(305) 777 9599

www.infrico.us
sales@infrico.com
service@infrico.com