

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

Project:
Rev.:
Zone:
Location:



CODICE
CR0991789

MODELLO
D93/10CGW14

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Table tops with 20/10 thickness with 55x52 cm or 95x52 cm storage space.
Right rear exhaust 22 mm in diameter, prepared for ground connection.
In the compartment area, full-width tray for collecting overflow liquids.

Enamelled cast iron ring burner, available in 10 or 14 kW, removable for easier cleaning.

Table top with standardised tank and liquid drainage in the rear right-hand corner.

Tray for collecting overflow liquids.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

Project:
Rev:
Zone:
Location:



CODICE
CR0991789

MODELLO
D93/10CGW14

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991789
DEFINITION	D93/10CGW14 1 FIRE WOK 14KW LIVING AREA
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	64,000 Kg
VOLUME (net)	0,470
PACKAGE LENGTH	660,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,774 m3
GROSS PACKING WEIGHT	78,800 Kg
GAS POWER	14,00
GAS POWER (G25.3/25mbar)	13,30
GAS/REFRIGERANT TYPE	METANO "H, E" G20 20/25mbar
N. FIRES/PLATES	UN FUOCO
CERTIFIED MODEL	D93/10 CGW

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

Project:
 Rev:
 Zone:
 Location:


CODICE
CR0991789

MODELLO
D93/10CGW14

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

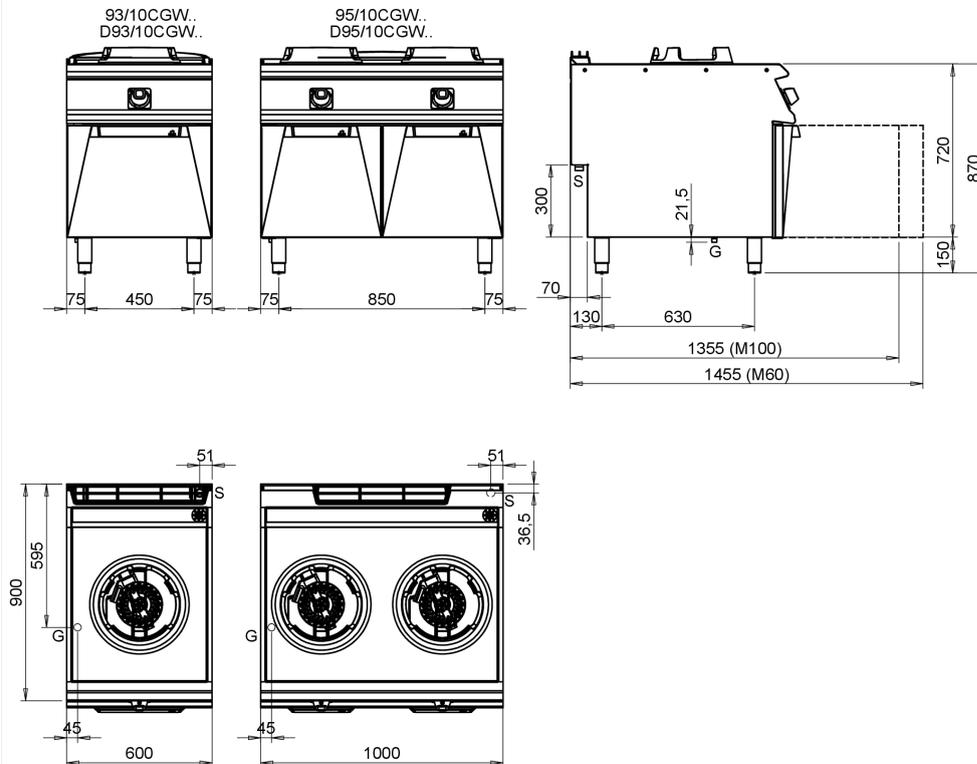

Legenda - Legende - Key - Légende - Leyenda - Legenda

- G** Attacco arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting **EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S** Scarico acqua - Wasserablauf - Water drain - Evacuation eau - Descarga de agua - Afvoer water **EN 10226-1 R 1**

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

Project:
Rev:
Zone:
Location:



CODICE
CR0991789

MODELLO
D93/10CGW14

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Enamelled cast iron ring burner, available in 10 or 14 kW, removable for easier cleaning.



Table top with standardised tank and liquid drainage in the rear right-hand corner.



Tray for collecting overflow liquids.

WOK 1 GAS FIRE 14KW ON OPEN COMPARTMENT

Project:
Rev:
Zone:
Location:



CODICE
CR0991789

MODELLO
D93/10CGW14

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0996999	DBVP6	
CR1353599	DBVC6	
CR0592789	ZF6	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment