MAXX COLD®
V-Series

Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 2 Glass Door Reach-In Refrigerator, Bottom Mount, in Stainless Steel

MVR-49GDHC



Ideal for showcasing your goods in restaurants, cafes, bakeries, catering businesses and more, theMaxx Cold V-Series 2 Glass Door Reach-In Refrigerator is a smart investment. Offering ample storage space for perishable goods, ingredients, prepared foods and beverages, this commercial reach-in refrigerator measures 54"W and has a storage capacity of 42 cubic feet. It is constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior.

ELECTRIC

Voltage	Utility Frequency (Hz)	Power Phase	NEMA 5-15P
115V	60	1ph	

Cord Length (Inches): 98.5"
Plug Type: NEMA 5-15P
Cord set included

3RD PARTY APPROVALS

C ETL LISTED US Intertek

ETL SANITATION LISTED Intertek

WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor, One (1) Year Warranty on Compressor and Evaporator

Contact Maxx Cold for details at TechnicalServices@TheLegacyCcompanies.com or 877.368.2797

1 YEAR PARTS & LABOR WARRANTY 1 YEAR COMPRESSOR

FEATURES AND CONSTRUCTION

- Reach-in refrigerator with two self-closing, locking, dual-pane glass doors with easy-to-grip handles
- 42 cu ft storage capacity with 6 adjustable heavy-duty wire shelves
- Constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters for easy mobility in your commercial kitchen
- Digital control system lets you easily adjust the temperature
- Temperature range 34°F to 40°F (1°C to 4°C)
- LED temperature display is easy to read
- Equipped with integrated condensate evaporator; therefore, no drain line connection is needed
- Easily accessible bottom mount for cleaning
- Urethane foam insulated walls

STORAGE CAPACITY

- Cubic Feet: 42.06 cu. ft.

TEMPERATURE

- Holding Temperature (Fahrenheit): 32° - 100°


These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

The Legacy Companies
3355 Enterprise Avenue, Suite 160 • Fort Lauderdale, FL 33331
Sales: 954.202.7419 • Sales@TheLegacyCompanies.com • www.maxx-cold.com


Maxx Cold V-Series 2 Glass Door Reach-In Refrigerator, Bottom Mount

MVR-49GDHC


FRONT

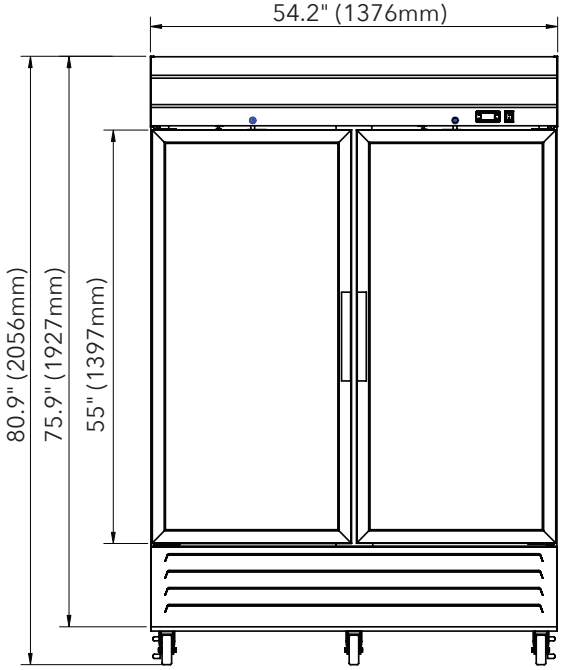

SIDE

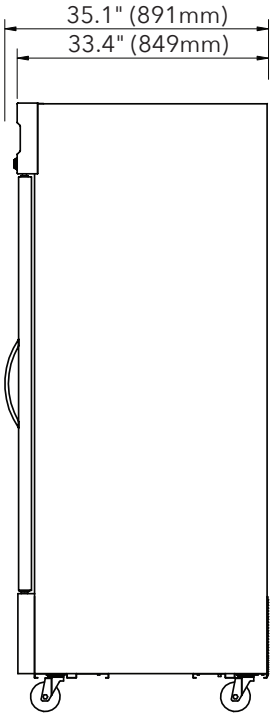

TOP

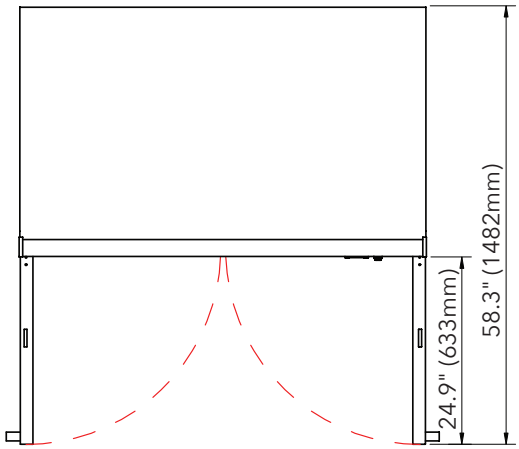

Reach-In

Doors	Shelves	Amps	HP	Wattage	Refrigerant Type / Oz.	Assembled Dimensions L x W x H (in)	Item Weight (lbs)	Shipping Weight (lbs)
2	6	2.2A		330W	R290 3 oz	35.10" x 54.20" x 80.90"	342.0	460.0

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.