



Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



TST-46

OPTIONS:

- 14 gauge tops
- Internal Locking device
- Pass-Thru construction
- Foodshields
- Workshelves
- Trayslides
- Special length not listed
- Recessed top (to accommodate griddles, fryers, etc.)
- 6" Stainless steel legs
- Veneered plastic laminate panels on body
- Powder coat paint colors
- Kickplates s/s or p/g
- 34" ADA height (units finish at 33.5").
Adjustable height casters with 5/8" adjustability allow leveling to 34".

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1178 Thurmduke - Solid Top

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmduke Serving Systems

Solid Top Units

- TST-18 18" length units
- TST-32 32" length units
- TST-46 46" length units
- TST-60 60" length units
- TST-74 74" length units
- TST-88 88" length units

TOP:

- 16 gauge, 300 Series stainless steel
- Sound-deadening

BODY:

- Choice of (12) powder coat paint colors
- Stainless steel body
- NSF approved 5" diameter polyurethane casters

Note: Due to tipping hazard casters are not available on 18" units. (Unless bolted to another unit)

- Operator's side open to bottom shelf
- 7" high stainless steel rail on operator's side
- End and side opposite operator fully enclosed
- Intermediate and bottom shelves to match body

Agency Listings:



Specification subject to change




WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning




THURMADUKE SERVING SYSTEMS SOLID TOP UNITS

A.I.A. File No. 35-C-13


Catalog No. TSS-SOLID

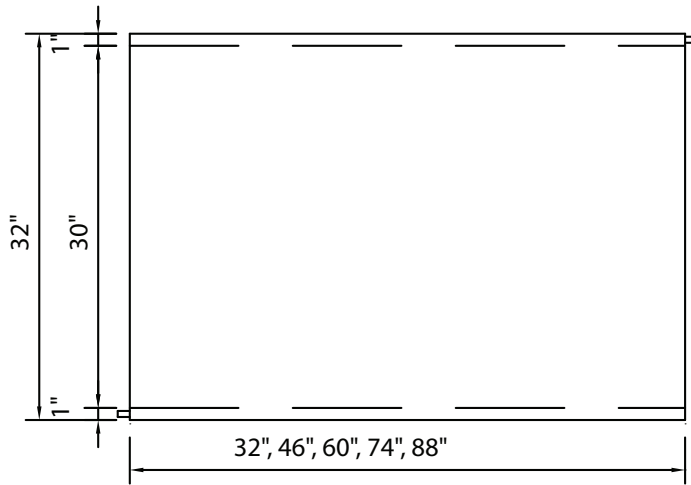

TOP VIEW

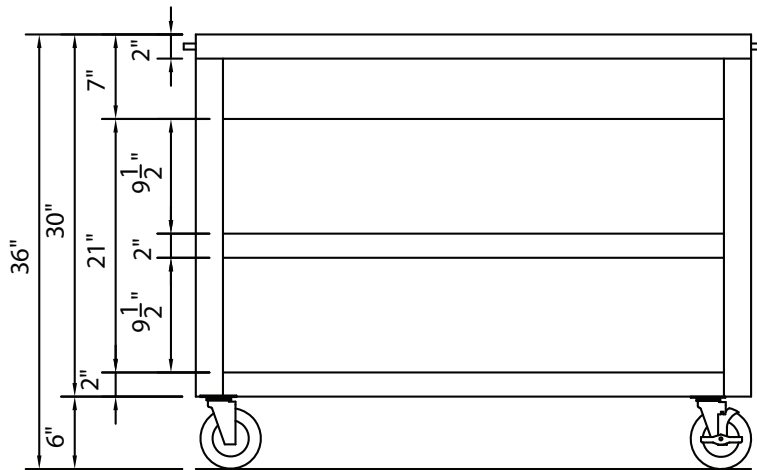

FRONT VIEW

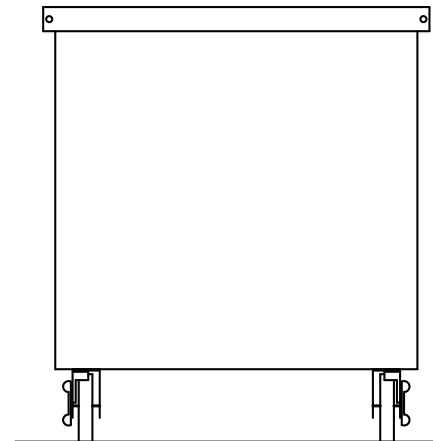

RIGHT SIDE VIEW

DIMENSIONS:

Freight Class: 150

Model	Length		Width		Height		Cube ft. crated	Weight	
	in	cm	in	cm	in	cm		lbs	kg
TST-18	18	45.7	32	81.3	36	91.4	22.0	200	90.9
TST-32	32	81.3	32	81.3	36	91.4	34.8	215	97.7
TST-46	46	116.8	32	81.3	36	91.4	47.7	314	142.7
TST-60	60	152.4	32	81.3	36	91.4	60.5	380	172.7
TST-74	74	188.0	32	81.3	36	91.4	73.3	446	202.7
TST-88	88	223.5	32	81.3	36	91.4	86.2	480	218.2

THURMADUKE SERVING SYSTEMS - SOLID TOP UNITS



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com