DUAL TEMP REFRIGERATOR/FREEZER

Model: 3RRFNHD

Natural Refrigerant R-290 Model

3-Section Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F) with Half Doors

3RRFNHD - Stainless steel front, aluminum end panels and interior
3RRFNSAHD - Stainless steel exterior, aluminum interior
3RRFNSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Rehinging of doors (consult factory)
Additional epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	**Correctional Facility Options**
Custom laminates	• One way security screws
Pan slide assemblies	• Locking hasp (lock not included)
Wine rack	• Stainless steel mesh cover
Adjustable Legs	• Coverless hinges
Heavy Duty Pilaster Strips	

Consult factory for other model configurations, options and accessories.

Continental® Refrigerator

WARRANTY 7 Year Parts & Labor 7 Year Compressor

Project Name:

Model Specified:

Location:

Item No: **Quantity:**

AIA #: **SIS #:**

Standard Model Features

REFRIGERATION SYSTEM

- Separate, self contained, performance rated refrigeration systems
- Natural, environmentally safe, high efficiency R-290 refrigerant[1]
- Automatic, electric condensate evaporator
- Expansion valve system

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

- 3” non-CFC polyurethane foam insulation
- Smooth, polished chrome workflow door handles
- Cam action, lift off hinges
- Self-closing doors
- Magnetic snap in Santoprene™ door gaskets
- Cylinder lock in each door
- Heavy duty, epoxy coated steel shelves
- 5” casters

MODEL FEATURES

- LED interior lighting
- Electronic controllers with digital display & hi-low alarm
- Off-cycle defrost (refrigerator section)
- Automatic electric defrost (freezer section)

[1] R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	48/20 (1359/566 l)
Width, Overall (inches)	78 (1981 mm)
Depth, Overall (inches) (including handles)	35 ⅜ (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	55 ½ (1410 mm)
Clear Door Width (inches)	19 ⅜ (492 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 5" casters)	82 ¼ (2089 mm)
Number of Doors	6
Number of Shelves	9
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	⅓, ⅓
R-290 Refrigerant Charge (oz)	4.2, 3.5
Capacity (BTU per hour)*	2540, 1200

ELECTRICAL DATA


Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3 / 3
Total Amps (International)	4.9 (2.5) / 6.9 (3.5)
Defrost Amps (International)	6.1 (3.1)
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)

SHIPPING DATA


Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu l)
Weight Std - Crated (pounds)	835 (379 kg)
Weight SS - Crated (pounds)	935 (424 kg)

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)
* Rating @ -15°F evaporator, 90°F ambient (freezer)
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

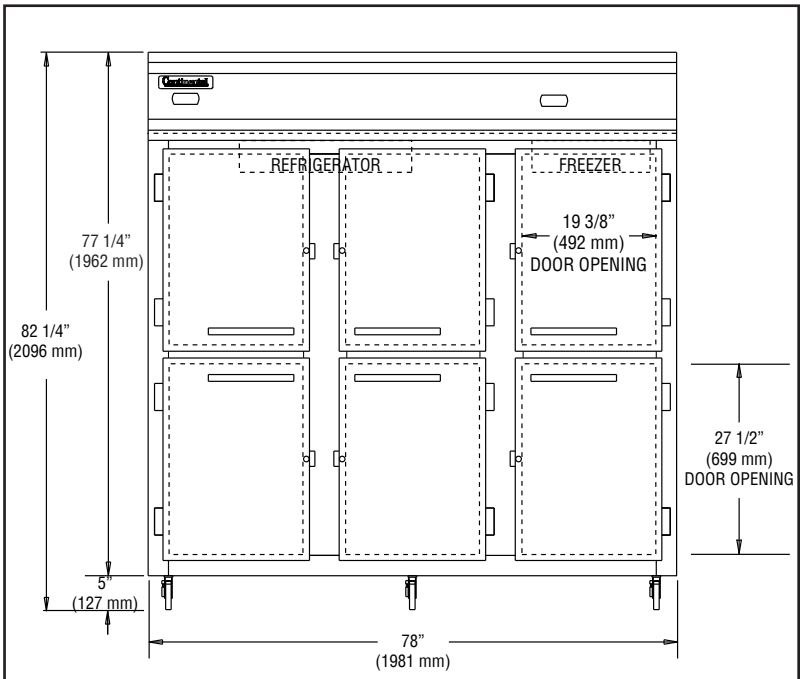

FRONT VIEW

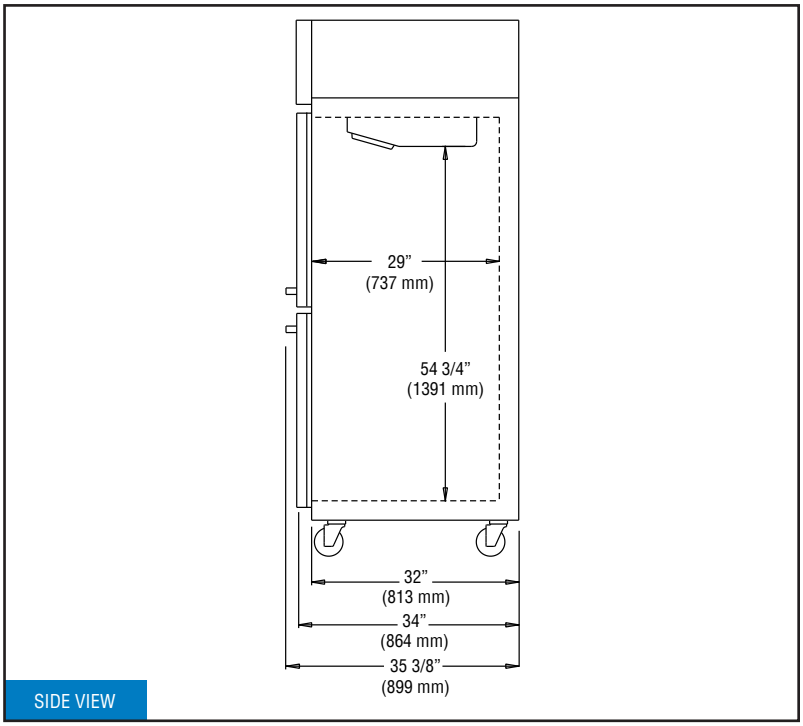

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

PROUDLY DESIGNED & ASSEMBLED IN THE U.S.A.

Equipped with two NEMA-5-15P Plugs (varies by country)

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 12/24/25