



HOSHIZAKI

Premier KL 2 A 2D 2D C U 2-Section Refrigerated Counter



PRODUCT SERIES: PREMIER
ITEM NUMBER: 221000033210
COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier KL 2 A 2D 2D C U is a 2-section 1/1 GN refrigerated counter with 2 drawer sections each with 2 x 1/2 drawers with lock and a flat worktop. It has a net usable volume of 176 ltr. Castors H = 150mm.

- Fan assisted cooling
- Completely front vented
- Unit can be fully integrated. Due to front venting design, no air flow is required to the underneath, sides or back of unit
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet and compressor compartment construction
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- A compact slide out refrigeration unit for maintenance and service
- Removable condenser filter for cleaning or replacement
- Compartmentalized cooling unit that is available as one unit
- The cooling performance allows for drawer section next to compressor compartment
- Drawers with lock
- Drawers with pull-out stop
- The cooling performance allows for drawer section next to compressor compartment
- Removable magnetic drawer gaskets with triple insulation area
- Pan-shaped inside base with rounded corners to catch fluids
- IP 2X water protection
- Matching design identity as the Premier cabinets



1 / 1 GN

OPTIONAL ACCESSORIES

Set of legs 125-200mm
Set of legs 130-180mm
Set of castors 125mm
Set of castors 150mm
Set of castors 200mm
Mini Castors - 2 braked and 2 unbraked 88mm
Castor Extension Kit (extends height of castors by 50mm)
Door section
Drawer section with 2 x 1/2 drawers
Drawer section with 3 x 1/3 drawers
Soft-close drawer Conversion Kit (for retrofit)
Flat worktop
Flat worktop with 50mm splashback
Flat worktop with 100mm splashback

WARRANTY PERIOD

6 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: R600a / Refrigerant (kg): 0.07 / CO2 equivalent (kg): 0.21

CERTIFICATIONS



Energy consumption (kWh/Year)	Energy efficiency class	Energy efficiency class standard	Energy Efficiency Index EEI
390	A	ISO 22041-2019	17.42



HOSHIZAKI

Premier KL 2 A 2D 2D C U





TECHNICAL SPECIFICATIONS

Temperature Range	GN or Tray Size (mm)	Volume, Gross (ltr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. capacity at -10°C (Watt)	Climate Class	Sound Level – dB(A)
+2/+12°C	1/1 GN	301	176	230V, 50 Hz	115	206	5 (max. ambient 40°C w/ 40% RH)	43

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Net Weight (kg)	Dimensions, Packed, W x D x H (mm)	Weight, Packed (kg)	Volume Packed (m3)
1310 x 700 x 904.2 (including castors)	113	1340 x 730 x 1103	125	1.08

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

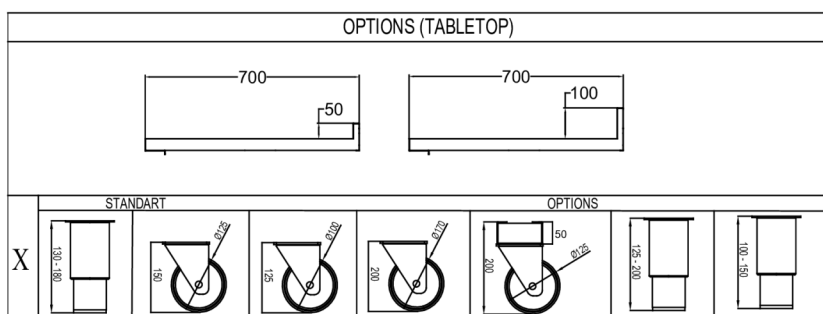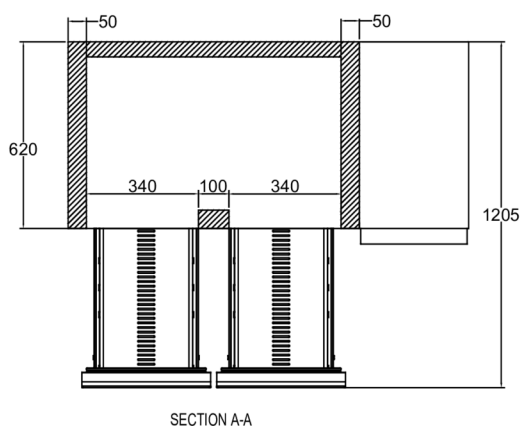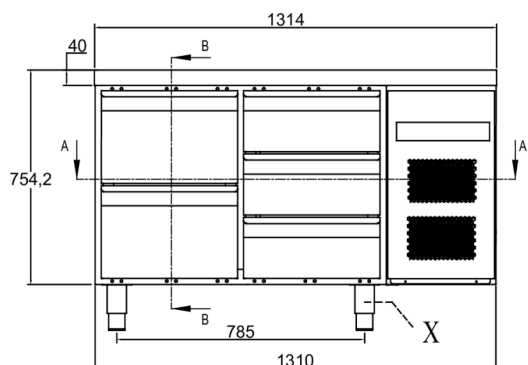

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.be
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk



HOSHIZAKI

Premier KL 2 A 2D 2D C U

