



VACUUM PACKING MACHINE SU-520GP+ CC 230/50-60/1

· DEEP-DRAWN CHAMBER

Tabletop model. 20m³/h. 420+420 mm.



1141107



SALES DESCRIPTION

Two sealing bars (420+420 mm.)
20 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber. Long-shaped, deep-drawn chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

OPTIONAL

- ☐ Inert gas
- ☐ Sealing plus
- ☐ Printer
- ☐ Bluetooth connectivity
- ☐ Vacuum packing bags
- ☐ External vacuum kit for Vac-Norm, containers and accessories
- ☐ Bag cutting kit
- ☐ Support for liquid packaging
- ☐ Additional filling plates

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kits
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB Desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 20 m³/h
Pump capacity (60 Hz): 20 m³/h
Bar length: 420 mm
Total loading: 750 W
Vacuum pressure (maximum): 2 mbar
Electrical supply: 230 V / 50-60 Hz / 1 ~ (5.5 A)

Internal dimensions

- ✓ Width: 568 mm
- ✓ Depth: 431 mm
- ✓ Height: 215 mm

External dimensions (WxDxH)

- ✓ Width: 634 mm
- ✓ Depth: 552 mm
- ✓ Height: 513 mm

Net weight: 76 Kg

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions

786 x 612 x 685 mm
Gross weight: 84.6 Kg

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

product sheet
updated 19/05/2022








VACUUM PACKING MACHINE SU-520GP+ CC 230/50-60/1

• DEEP-DRAWN CHAMBER

Tabletop model. 20m³/h. 420+420 mm.



1141107

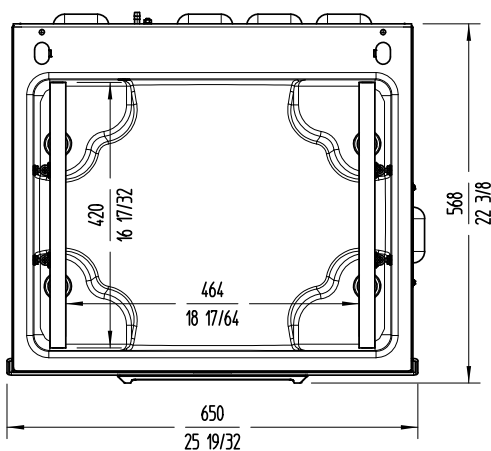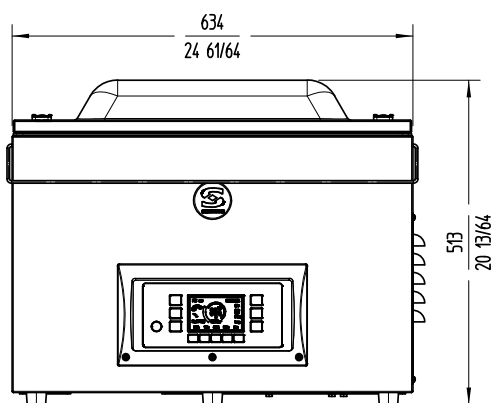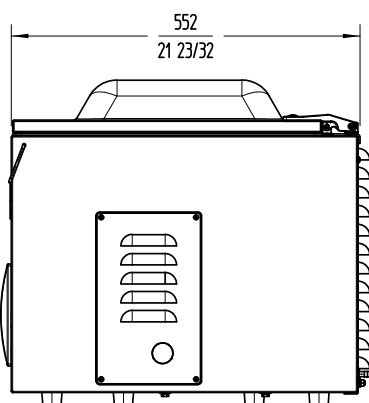

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road

Troon Industrial Park

LE4 9LS - Leicester

uksales@sammic.com

Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 19/05/2022