

# ELECTRIC GLASS-CERAMIC COOKER 2 ZONES ON COMPARTMENT

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0990659

MODELLO  
D92/10VTC

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Unbreakable ceramic glass top. Cooking zone (270x270mm) marked with square silk-screen printing, indicating the size of the container to be used. Single zone power of 4 kW. Temperature adjustable by thermostat from 70 to 450°C.

Unbreakable flush-mounted glass for easy handling of pans.

The temperature is regulated by means of an energy regulator, which allows two heating zone widths to be selected according to the size of

the pan bottom.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# ELECTRIC GLASS-CERAMIC COOKER 2 ZONES ON COMPARTMENT

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990659

MODELLO  
D92/10VTC

SERIE  
DIAMANTE90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990659
DEFINITION	D92/10 VTC GLASS CERAMIC 2Z. COMPARTMENT G.
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	42,000 Kg
VOLUME (net)	0,313
PACKAGE LENGTH	440,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1160,000 mm
PACKAGE VOLUME	0,522 m3
GROSS PACKING WEIGHT	52,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	8,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D92/10 VTC

# ELECTRIC GLASS-CERAMIC COOKER 2 ZONES ON COMPARTMENT

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....


CODICE  
CR0990659

MODELLO  
D92/10VTC

SERIE  
DIAMANTE90

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

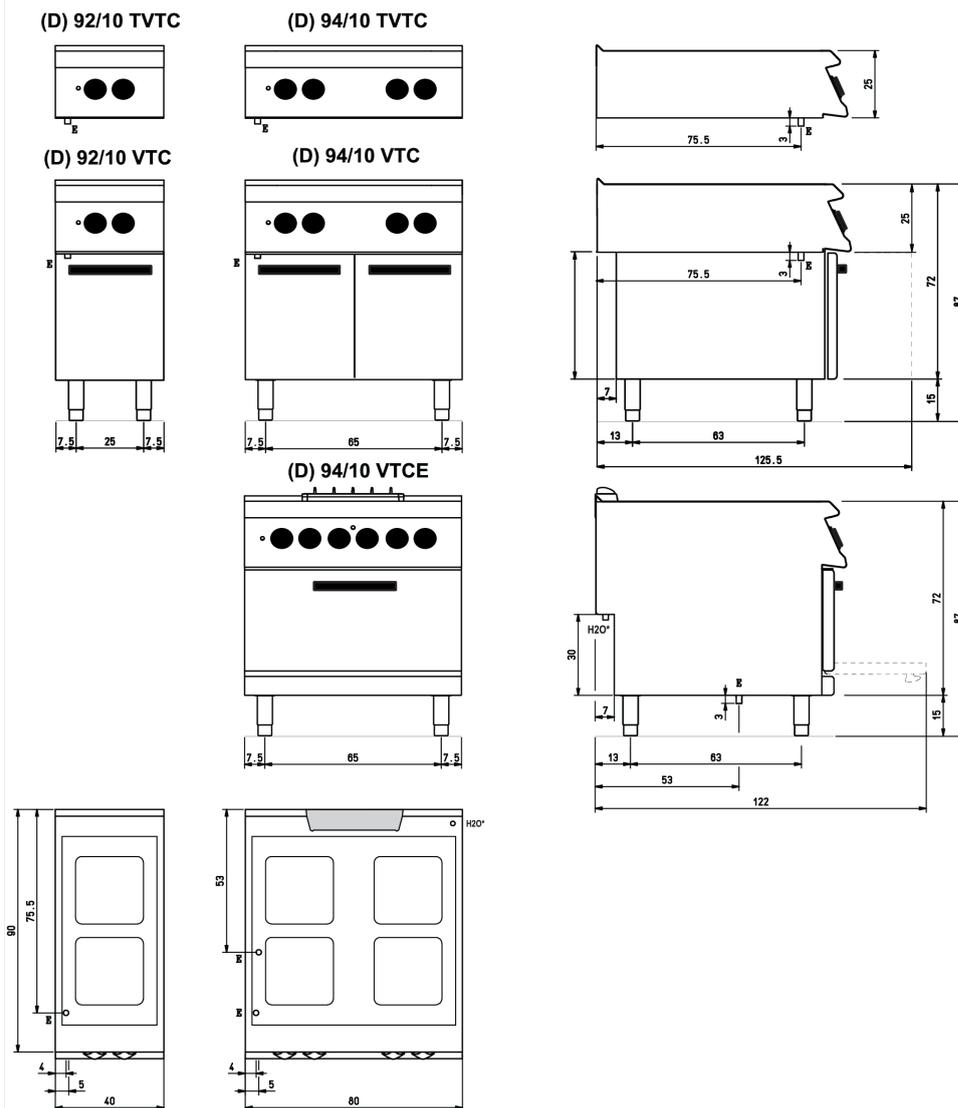

Legenda - Legende - Key - Légende - Leyenda - Legenda

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

**H20\*** Attacco arrivo acqua - Wasseranschluss - Water inlet  
 Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 1/2**

# ELECTRIC GLASS-CERAMIC COOKER 2 ZONES ON COMPARTMENT

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990659

MODELLO  
D92/10VTC

SERIE  
DIAMANTE90

## Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Unbreakable flush-mounted glass for easy handling of pans.



The temperature is regulated by means of an energy regulator, which allows two heating zone widths to be selected according to the size of the pan bottom.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



# ELECTRIC GLASS-CERAMIC COOKER 2 ZONES ON COMPARTMENT

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990659

MODELLO  
D92/10VTC

SERIE  
DIAMANTE90

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0996979	DBVP4	
CR0997009	DBVPA4	
CR0997029	DAPC	
CR0997019	DAPD	
CR0997039	DAPS	
CR0997049	DAPM	
CR0997059	DAPDB	
CR1353589	DBVC4	
CR0592659	92/10 BH	Open base - Hygienic finish H2 40cm Series 90
CR1353559	DRG11	
CR0592329	9FC40	
CR0592779	ZF4	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment