___ QTY: _

SIS #

VICTORY ELITE[™] TOP MOUNT FREEZER

VEFSA-3D-HG-HC **EXCLUSIVE WARRANTY**

7 Year Parts, Labor and Compressor

VICTORY

- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

CABINET CONSTRUCTION

PROJECT: _

MODEL # AIA #

ITEM # _

- Stainless Steel Front, Gray Coated Sides
- Aluminum Interior •
- Snap-In, Magnetic Door Gasket(s)
- · Heavy Duty Cam Lift Hinges
- Stay-Open Door Feature For Easy Product Loading
- Required Clearance Is 12" Top, 3" Rear And 0" Sides
- 6" Casters
- 8' Cord And Plug

FEATURES

- High Performance Refrigeration System With An Electronic Control
- Expansion Valve Technology
- Energy Efficient LED Lighting
- 9 Heavy Duty Epoxy Coated Shelves

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Freezer Capable Of Maintaining Product Temperature Down To -10°F


- · Seismic/Flanged Legs
 - · Additional Shelves: Heavy Duty Epoxy Coated Chrome Plated Or Stainless Steel
 - Remote Models* (6" legs only) (refrigerant must be specified at time of order, see not on back page)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com









Π

- Tray Slides
- 6" Legs Or 3" Casters e at time of order
- Stainless Steel Back Stainless Steel Interior
- · Stainless Steel Exterior

Rev. 7/1/24 Printed in U.S.A.

- · Stainless Steel Breaker


- Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs



VICTORY VICTORY ELITETM TOP MOUNT FREEZER

VEFSA-3D-HG-HC



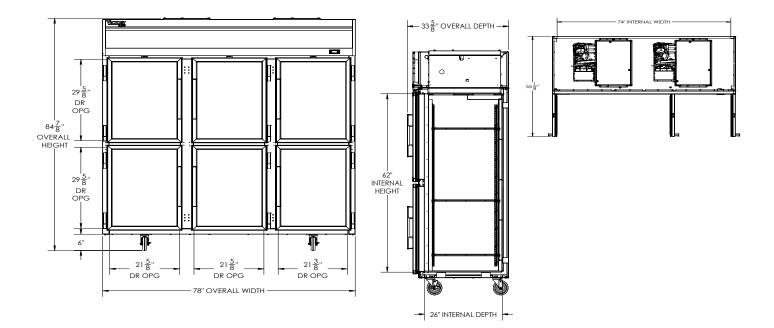

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	69.1	Cabinet Voltage	115/60/1	Height	88″
Width, Overall (in.)	78″	Total Amperes	13.2	Width	80″
Depth, Overall (with handles)	33 5/8"	NEMA Plug* (8' cord)	5-20P	Depth	45″
Height Overall (6" casters)	84 7/8″	REFRIGERATION DATA		Crated Weight	772 lbs
Depth, Door Open 90°	55 1/8″	Condensing Unit Size, HP*	(2) 3/4	*NOTE: Remote units are field wired and comes with 6″ legs. Refrigerant must be specified	
Door Opening (in.)	21 5/8" x 29 5/8" 21 3/8" x 29 5/8"	Refrigerant*	R290		
No. Of Doors/Shelves	6/9	Capacity (BTU/HR) (100°F/-20°F)	3854		
		Heat Rejection (BTU/HR)	5781	at time of order.	
		Charge (lbs/grams/ounces)	(2) 0.2535 / 115 / 4.06		

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

