



SELF-CONTAINED DIRECT DRAW CONCESSIONAIRE

Perlick's Self-Contained Direct-Draw Concessionaires provide a portable beverage dispensing solution, enabling large venues and stadiums to efficiently serve high volumes of guests wherever service is needed.

Job:
Area:
Item #:
Model #:



DDC92 shown with optional Draft Arm Towers. 61/8" casters included.



DDC92 shown with optional Draft Arm Towers. 61/8" casters included. All black option



SELF-CONTAINED DIRECT DRAW CONCESSIONAIRE

MODEL NUMBER
DDC68
DDC92

Feature-Benefits

- Fully portable and self-contained mobile dispensing system, storing a CO2 drum, regulator, and liquid waste tank in an access area
- Energy efficient self-contained R290 Hydrocarbon refrigeration system provides industry leading cooling performance and temperature consistency
- Includes door locks, bumpers, casters, and a side cabinet for storing a CO2 tank (not included)
- Stainless steel interior and top standard on all perlick Back Bar refrigeration for long life durability and easy to clean hygienic storage
- NSF Certified to NSF/ANSI Standard #7 for storage of bottles, canned, and kegged beverages
- 2" Foamed-in-place insulation provides energy savings using Ecomate(tm), a blowing agent that has zero-ozone depletion and zero global warming potential
- End wall compressor and evaporator design increases storage capacity by 14% compared to top mounted designs
- Integrated door locks standard on all units
- NSF Rated digital controller allows for easy and precise temperature changes
- Choose between three temperature ranges; Refrigerator (34°F-42°F) Factory set to 38°F, White Wine (40°F-65°F) Factory set to 45°F, Red Wine (40°F-65°F) Factory set to 60°F
- 6000K white LED lighting
- Choose between full Length, 6" chrome, or pull tab style handles
- Choose between solid stainless steel, all black, or customer provided overlay door
- 1 Year parts and labor warranty, 5 year compressor warranty



800.558.5592

perlick.com



MODEL NUMBERS - DDC68, DDC92

SELF-CONTAINED DIRECT DRAW CONCESSIONAIRE

MODEL NUMBERS		DDC68	DDC92
NUMBER OF DOORS		2	3
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	68 (1727)	92 (2337)
	Depth - in. (mm)	24¾ (629)	24¾ (629)
	Height - in. (mm)	34⅞ (878)	34⅞ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (118)	68 (1727)
	Depth - in. (mm)	18¾ (476)	18¾ (476)
	Height - in. (mm)	28½ (724)	28½ (724)
* INTERNAL VOLUME, Net. Cu. Ft. (Litres)		16 (453)	24.8 (702)
SHIPPING WEIGHT, Lbs. (kg.)		365 (165)	515 (233)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	5.5	6.3
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15
	Cord Length	6'5"	6'5"
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital control	Digital control
REFRIGERATION SPECIFICATIONS	Horsepower	1/4	1/3
	Refrigerant	R290	R290
	Refrigerant Charge, oz.	7.0	7.0
	Factory Temperature Setting-Refrigerator F (C)	38° (3.3°)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Condensing Unit Location	Left	Left
	Expansion Device	Capillary tube	Capillary tube
	Pull Out Condensing Unit	Yes	Yes
	Front Vented	Yes	Yes
PLUMBING	Floor Drain Included	Yes	Yes
	Evaporator Condensate	Automatically	Automatically

* **Note:** For keg capacities and layouts, go to www.perlick.com.



800.558.5592




perlick.com



MODEL NUMBERS - DDC68, DDC92

SELF-CONTAINED DIRECT DRAW CONCESSIONAIRE

Note: All Dispensing Towers shown are optional and must be ordered separately.

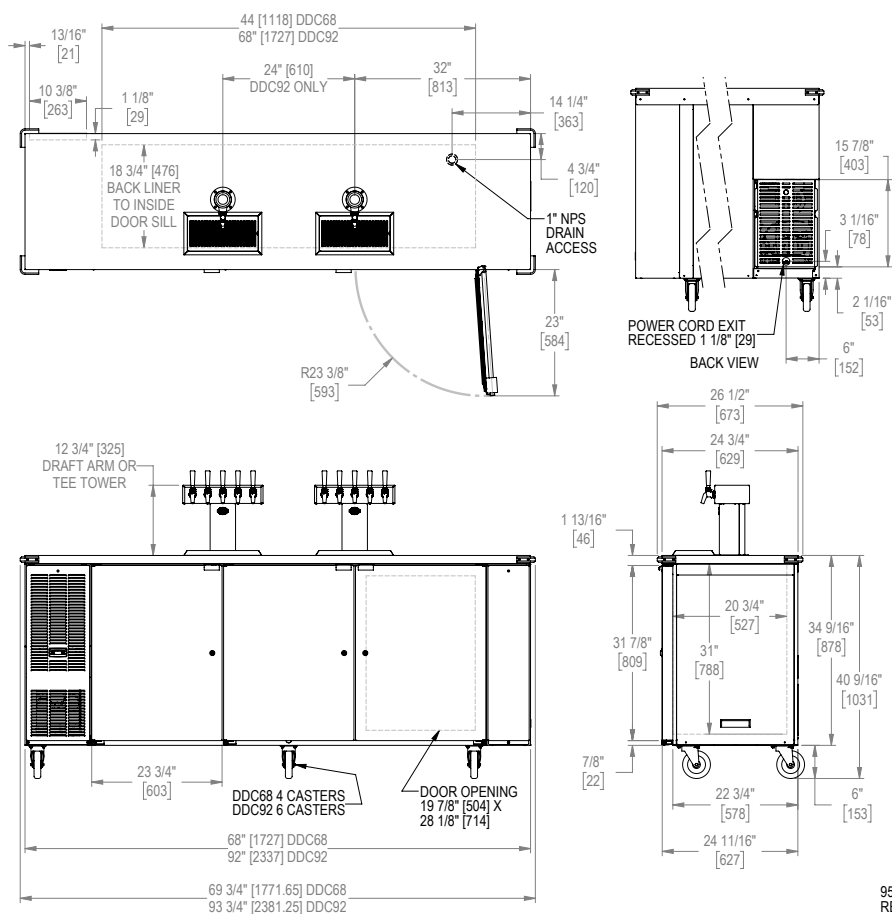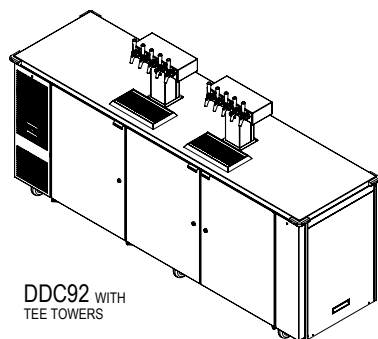

95181
REV B
CJK
11/17/20



800.558.5592

perlick.com