

## 2-BURNER GAS COOKER ON OPEN BASE

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0995119

MODELLO  
D92/10CG

SERIE  
DIAMANTE90



### GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

### TECHNICAL SPECIFICATIONS

Upper burners with stabilised flame, made of nickel-plated cast iron. Thermocouple safety valves with pilot flame.  
Black acid-resistant enamelled cast iron grids with long spokes for holding small pans.  
AISI304 stainless steel drip trays.  
Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.  
Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans

90° venturi that prevents the nozzle from clogging and accumulating dirt.

Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans

Removable AISI 304 stainless steel bowl for maximum hygiene.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

## 2-BURNER GAS COOKER ON OPEN BASE

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0995119

MODELLO  
D92/10CG

SERIE  
DIAMANTE90

### Technical Information

SPECIFICATION	DATA
MATERIAL	CR0995119
DEFINITION	D92/10 CG 2-BURNER OPEN COMPARTMENT
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	48,000 Kg
VOLUME (net)	0,313
PACKAGE LENGTH	440,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1160,000 mm
PACKAGE VOLUME	0,522 m3
GROSS PACKING WEIGHT	58,000 Kg
GAS POWER	10,50
GAS POWER (G25.3/25mbar)	9,00
N. FIRES/PLATES	DUE FUOCHI
CERTIFIED MODEL	D92/10 CG

# 2-BURNER GAS COOKER ON OPEN BASE

Project: .....  
 Rev.: .....  
 Zone: .....  
 Location: .....

CODICE  
CR0995119

MODELLO  
D92/10CG

SERIE  
DIAMANTE90



## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm


(D) 92/10 TCG  
 (D) 92/10 TCGP  
 (D) 92/10 TCG1P







(D) 98/10 TCG  
 (D) 98/10 TCGP  
 (D) 98/10 TCG2P



(D) 92/10 CG  
 (D) 92/10 CGP  
 (D) 92/10 CG1P



(D) 98/10 CG (D) 98/10 CGG (D) 98/10 CGE  
 (D) 98/10 CGP (D) 98/10 CGGP (D) 98/10 CGEP  
 (D) 98/10 CG2P (D) 98/10 CGG2P (D) 98/10 CGE2P

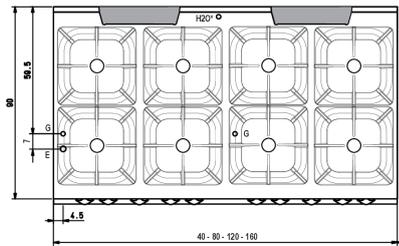

### Legenda - Legende - Key - Légende - Leyenda - Legend

- E** Pressacavo entrata linea elettrica - Stopfbuchse  
 Electric cable stress relief - Presse étoupe de câble él  
 Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection  
 Arrivée gaz - Union de gas - Gasaansluiting  
**EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- H2O\*** Attacco arrivo acqua - Wasseranschluss - Water inlet  
 Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 3/4**

## 2-BURNER GAS COOKER ON OPEN BASE

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0995119

MODELLO  
D92/10CG

SERIE  
DIAMANTE90

# Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



90° venturi that prevents the nozzle from clogging and accumulating dirt.



Nickel-plated cast-iron stabilised flame burners with double-crown spreader (improved performance facilitated by a flame distributed over two different sectors), Grid with long spokes to facilitate holding small pots and pans



Removable AISI 304 stainless steel bowl for maximum hygiene.

## 2-BURNER GAS COOKER ON OPEN BASE

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0995119

MODELLO  
D92/10CG

SERIE  
DIAMANTE90

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
SUPBRUC	SUP BRUC	
MA97365000	GGN1/1	
MA97375000	GGN2/1	
MA97377000	BF9M-X	
MA97376900	TGN2/1	
MA97378000	BF9M-T	
CR1353839	CR1353839	
CR1353849	CR1353849	
CR0996979	DBVP4	
CR0997009	DBVPA4	
CR0997029	DAPC	
CR0997019	DAPD	
CR0997039	DAPS	
CR0997049	DAPM	
CR0997059	DAPDB	
CR1353589	DBVC4	
CR0592659	92/10 BH	Open base - Hygienic finish H2 40cm Series 90
CR1353559	DRG11	
CR0592329	9FC40	
CR0592779	ZF4	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment