

# ENTRY 5 Low-profile



## Capacity

### Kg

18	+90°C +3°C
12	+90°C -18°C

### Trays

73	Trays pitch [mm]
5	GN 1/1 (H40 - 65)
5	GN 1/1 (H20)
5	EN 60/40

## Functions

Shock Freezing

Blast chilling

Fish sanitation

Ice cream hardening

Pastry

Pre-cooling

Air defrosting

## CONSTRUCTION FEATURES

4.3" touch screen controller

Unibody AISI 304 stainless steel

Rounded internal corners

CFC free highdensity polyurethane insulation

Evaporator with cataphoresis rust protection

Door hinge on left side

Heated door perimeter

External drip tray

Single core probe

## CYCLES AND SOFTWARE

Probe cycles

Time cycles

Cookbook

HACCP data collection.

## ACCESSORIES

EN tray holder

Lock predisposition

## OPTIONALS

Door opening hook

Wifi connection

Right hinged door

Castors




## TECHNICAL DATA

	PlugIn Air	Remote	H2O PlugIn	CO2 provision
Temperature range [°C]			-40/+20	
Cooling power (evap. -10°C / cond. 45°C) [W]	1380	-	1380	-
Required cooling capacity [W]	-	-	-	-
∅ liquid line ["] [mm]	-	-	-	-
∅ suction line ["] [mm]	-	-	-	-
Condensation	Air cooled	-	Water cooled	-
Refrigerant gas	R290	-	R290	-
GWP	3	-	3	-
Climatic class	-	-	-	-
Power supply [V/ph/Hz]	220-240/1N/50	-	220-240/1N/50	-
Max absorption cold cycles [W]	761	-	761	-
Max absorption hot cycles [W]	-	-	-	-
Blast chilling capacity (+90°C/+3°C) [kg]	18	-	18	-
Freezing capacity (+90°C/-18°C) [kg]	12	-	12	-
Inside dimensions WxDxH [mm]	615x417x405	-	615x417x405	-
External dimensions WxDxH [mm]	715x695x854	-	715x695x854	-
Internal capacity [L]	104	-	104	-
Packaging dimensions WxDxH [mm]	730x755x1100	-	730x755x1100	-
Packing volume [m3]	0,6	-	0,6	-
Gross weight [kg]	99	-	99	-

## EN22042

65°C / +10°C	kWh/Kg	0,092	65°C / -18°C	kWh/Kg	0,312
	min	98		min	258
	Kg	23		Kg	17




## GASTRONOMY

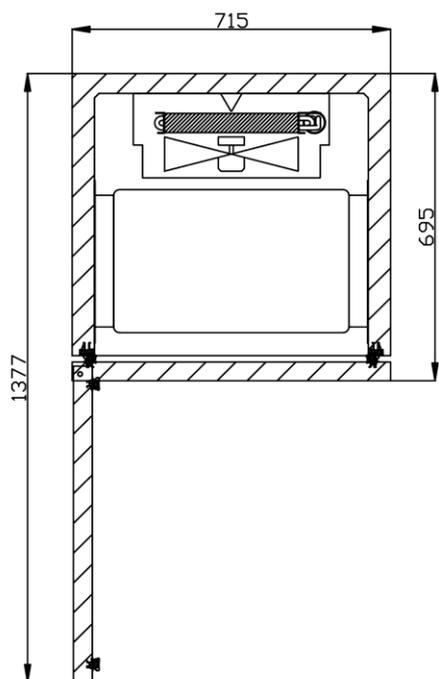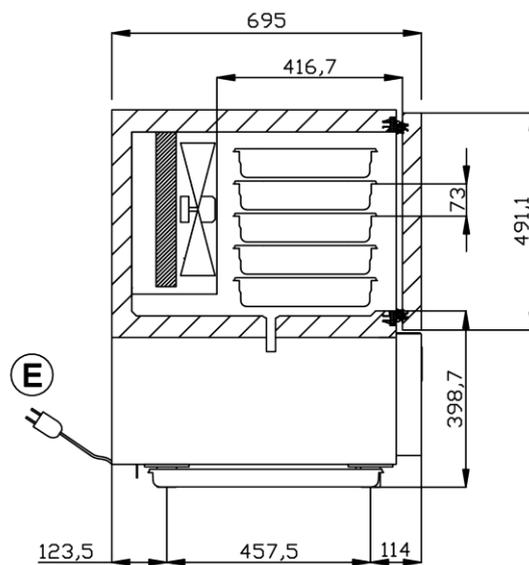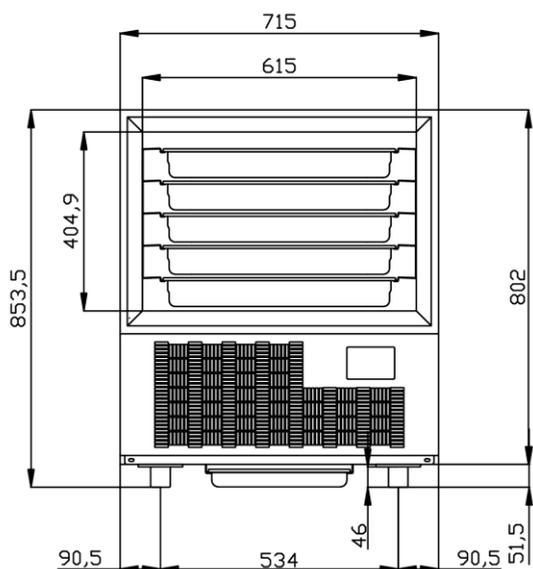

 H MIN 46 [1.81in] - H MAX 46 [1.811 in]

 CONNESSIONE ELETTRICA  
ELECTRICAL CONNECTION




## PASTRY

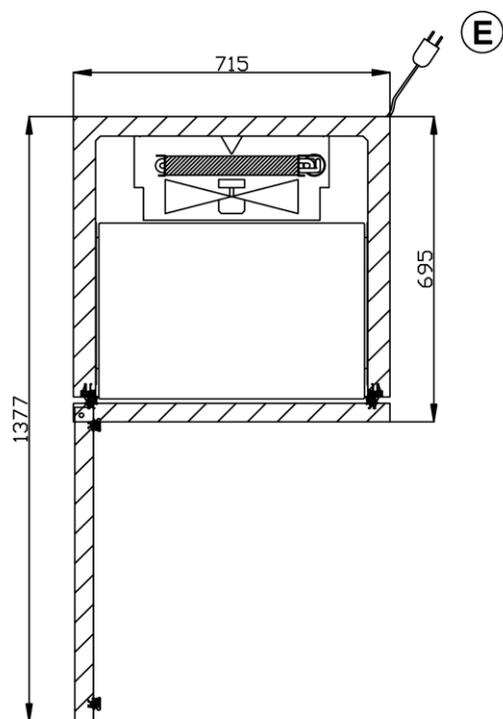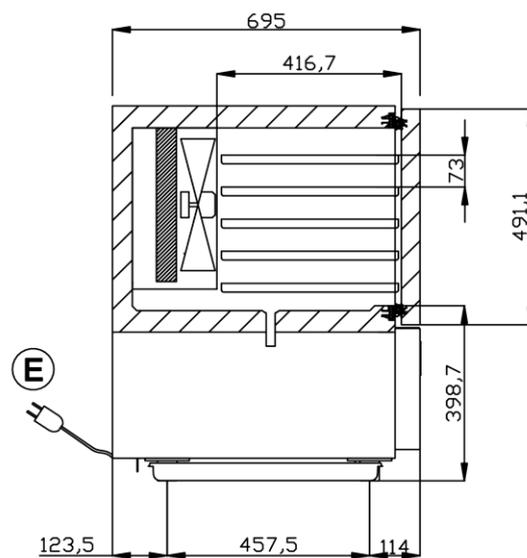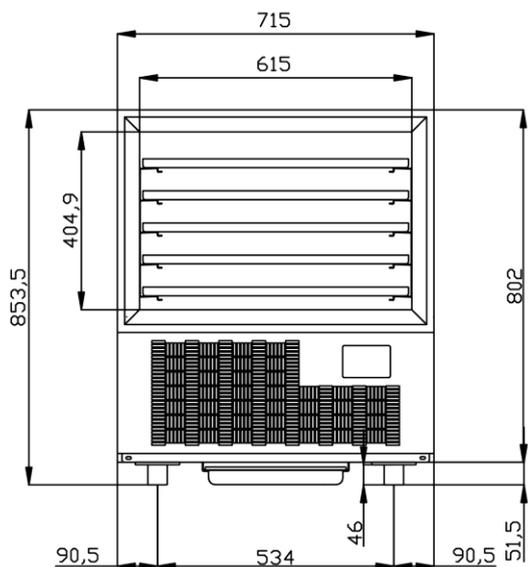

 H MIN 46 [1.81in] - H MAX 46 [1.81 in]

**(E)** CONNESSIONE ELETTRICA  
ELECTRICAL CONNECTION

## ICE-CREAM

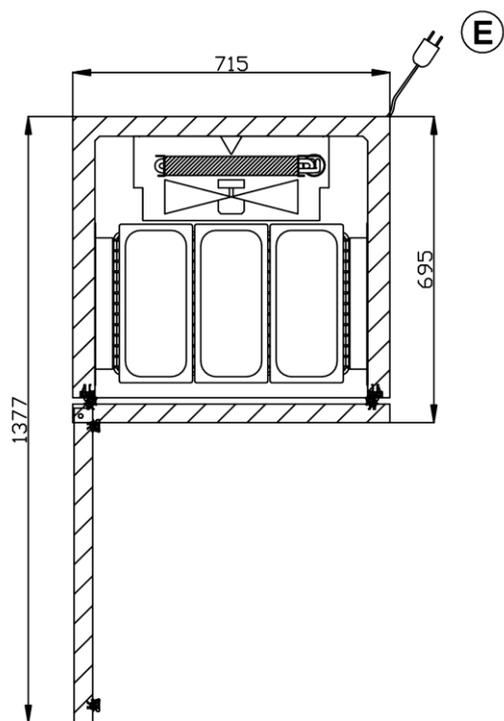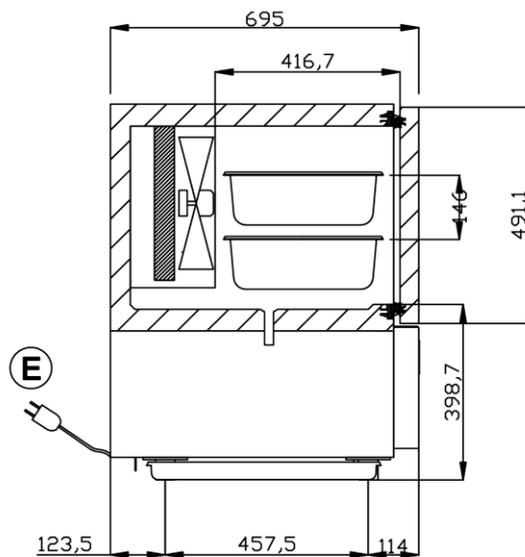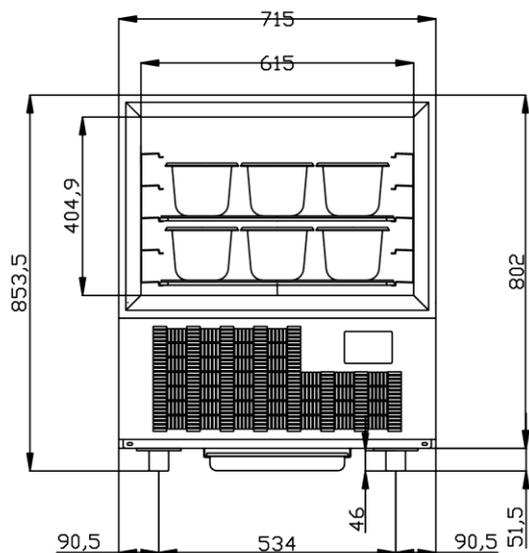

 H MIN 46 [1.81in] - H MAX 46 [1.81 in]

**(E)** CONNESSIONE ELETTRICA  
ELECTRICAL CONNECTION