

SHELVES

Nominal Width/Length (in./mm)		Approx. Pkd. Wt. (lbs./kg)		Cat. No. Chromate	Cat. No. Epoxy Coating
14x24	457x760	7.8	3.5	C1424C	C1424K
14x30	457x914	9.5	4.2	C1430C	C1430K
14x36	457x1060	11.3	5.0	C1436C	C1436K
14x42	457x1219	13.0	5.8	C1442C	C1442K
14x48	457x1372	14.8	6.6	C1448C	C1448K
14x60	457x1524	16.5	7.4	C1460C	C1460K
14x72	457x1829	19.8	8.8	C1472C	C1472K
18x24	457x610	8.0	3.6	C1824C	C1824K
18x30	457x760	7.8	3.5	C1830C	C1830K
18x36	457x914	9.5	4.2	C1836C	C1836K
18x42	457x1060	11.3	5.0	C1842C	C1842K
18x48	457x1219	13.0	5.8	C1848C	C1848K
18x54	457x1372	14.8	6.6	C1854C	C1854K
18x60	457x1524	16.5	7.4	C1860C	C1860K
18x72	457x1829	19.8	8.8	C1872C	C1872K
21x24	530x610	8.0	3.6	C2124C	C2124K
21x30	530x760	9.5	4.2	C2130C	C2130K
21x36	530x914	11.3	5.0	C2136C	C2136K
21x42	530x1060	12.5	5.6	C2142C	C2142K
21x48	530x1219	14.3	6.4	C2148C	C2148K
21x54	530x1372	16.5	7.4	C2154C	C2154K
21x60	530x1524	18.3	8.1	C2160C	C2160K
21x72	530x1829	21.5	9.6	C2172C	C2172K
24x24	610x610	9.5	4.2	C2424C	C2424K
24x30	610x760	11.3	5.0	C2430C	C2430K
24x36	610x914	13.0	5.8	C2436C	C2436K
24x42	610x1060	14.0	6.3	C2442C	C2442K
24x48	610x1219	15.5	6.9	C2448C	C2448K
24x54	610x1372	18.3	8.1	C2454C	C2454K
24x60	610x1524	20.0	8.9	C2460C	C2460K
24x72	610x1829	23.3	10.4	C2472C	C2472K

Note: Each shelf up to and including 48" (1219mm) long have a maximum weight capacity of 800 lbs. (363kg) evenly distributed. Shelves longer than 48" (1219mm) have a maximum weight capacity of 600 lbs. (272kg) evenly distributed.


POSTS (STATIONARY)

Nominal Width/Length (in./mm)		Approx. Pkd. Wt. (lbs./kg)		Cat. No. Chromate	Cat. No. Epoxy Coating
7	178	0.7	0.3	C7C	C7K
13	330	0.9	0.4	C13C	C13K
33	838	2	0.9	C33C	C33K
54	1372	3.4	1.5	C54C	C54K
63	1600	3.6	1.6	C63C	C63K
74	1880	4.1	1.9	C74C	C74K
86	2184	4.8	2.2	C86C	C86K

SPLIT POSTS

4 pack of 2-piece posts for a single shelving unit.

Nominal Width/Length (in./mm)		Approx. Pkd. Wt. (lbs./kg)		Cat. No. Chromate	Cat. No. Epoxy Coating
74	1880	16.4	7.6	C74TSPC-4PK	C74TSPK-4PK

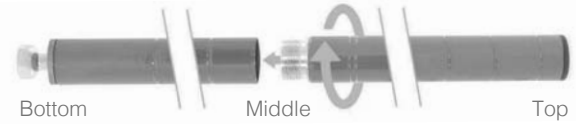

POSTS (MOBILE)


Nominal Width/Length (in./mm)		Approx. Pkd. Wt. (lbs./kg)		Cat. No. Chromate	Cat. No. Epoxy Coating
7	178	0.6	0.3	C7UC	C7UK
13	330	0.8	0.4	C13UC	C13UK
33	838	1.9	0.9	C33UC	C33UK
54	1372	3.3	1.5	C54UC	C54UK
63	1600	3.5	1.6	C63UC	C63UK
74	1880	4	1.8	C74UC	C74UK
86	2184	4.7	2.1	C86UC	C86UK



AVAILABLE IN POS KITS
See Page 6



Stationary Post with adjustable leveling foot
Use Foot Plates for greater stability.

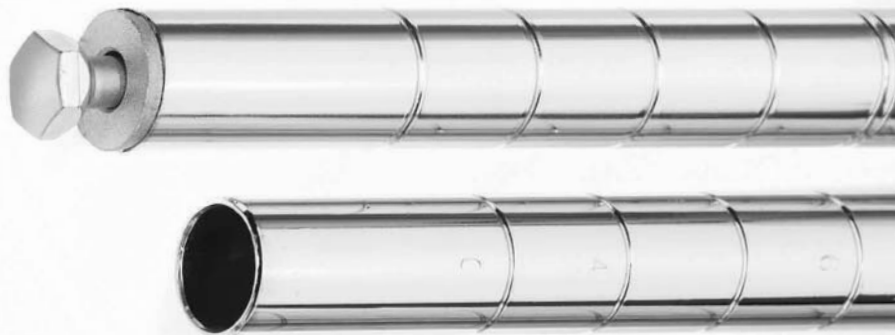

Stem Caster Mobile Post accepts standard stem casters. Use these for the majority of standard duty transport and movable storage applications.

See Casters on Next Page >