



# Electrolux

## Modular Cooking Range Line 200 mm - 1 Well Electric Fryer 9 liter

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Modular Cooking Range Line  
200 mm - 1 Well Electric Fryer 9 liter

|                            |  |
|----------------------------|--|
| <b>285561 (EXFRPB1BWF)</b> | 9lt electric fryer with 1 well, 1 basket and warning led |
| <b>285563 (EXFREB1BWF)</b> | 9lt electric fryer with 1 well, 1 basket and warning led |

### Short Form Specification

**Item No.** \_\_\_\_\_

Electric freestanding fryer with deep-drawn well ideal for kitchens needing a versatile, compact, efficient but high productivity unit capable of cooking numerous portions time after time. The well layout, heating elements layout and the "eco" mode, require a minimum amount of oil and guarantee long oil life. Made in stainless steel. 4-position tilting elements to ease cleaning and use.

### Main Features

- All major compartments located in front of unit for ease of maintenance.
- IP24 protected.
- Overheat protection thermostat as standard on all units.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Oil drains through a tap into a drainage container positioned under the well.
- Supplied as standard with 1 basket and 1 right side door for cupboard.
- Deep drawn well.
- Internal high efficiency tilting heating elements for high productivity and ease of cleaning of internal well.
- Eco function switches the unit in stand-by mode to save energy. Fast temperature recovery to restart frying in less than one minute.
- Integrated s/s oil filter.
- Control knobs positioned behind the door.
- Unit delivered with four 50 mm legs in stainless steel as standard.
- 4-lights display to indicate equipment under voltage, heaters on in "eco" mode, heaters on in "fry" mode, the unit is in overheating protection mode.

### Construction

- Interior of well with rounded corners for ease of cleaning.
- One piece pressed 1.5 mm work top in Stainless steel.
- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Unit is 60 cm deep to give a compact working area and reduced footprint.
- The unit is designed for freestanding installation having external frame closed on sides, back and bottom.
- A bracket for wall mounting installation is provided as standard.
- Folding lid with storage in the door.
- The V-shaped well is made of two pieces of pressed stainless steel that are seamlessly laser-welded.

### Included Accessories

- 1 of Basket for 9lt fryer PNC 206390
- 1 of Stainless steel oil collecting filter PNC 206393

### Optional Accessories

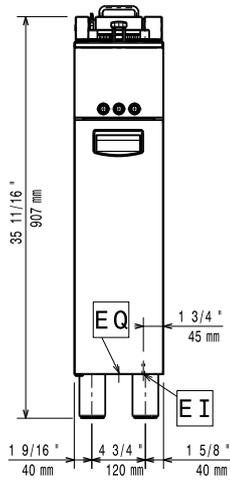
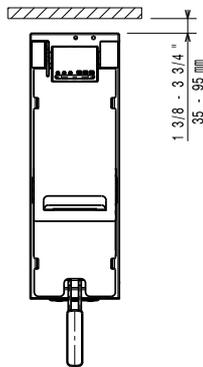
**APPROVAL:** \_\_\_\_\_



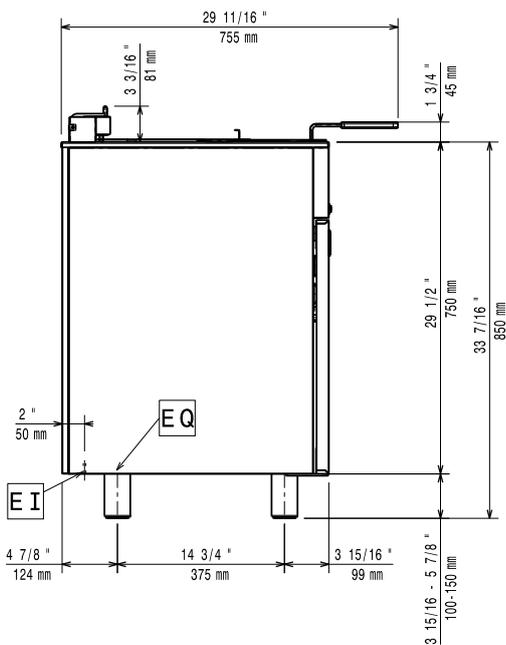
Electrolux

Modular Cooking Range Line  
200 mm - 1 Well Electric Fryer 9 liter

- Basket for 9lt fryer PNC 206390
- Connecting strip for 9lt fryer PNC 206391
- Fabric oil collecting filter PNC 206392
- Stainless steel oil collecting filter PNC 206393
- Perforated fish plate for 9lt fryer PNC 206394

**Front**

**Top**


EI = Electrical connection

**Side**


### Electric

#### Supply voltage:

|                     |                     |
|---------------------|---------------------|
| 285561 (EXFRPB1BWF) | 240 V/1 ph/50/60 Hz |
| 285563 (EXFREB1BWF) | 415 V/3 ph/50/60 Hz |

#### predisposed for

|                     |                          |
|---------------------|--------------------------|
| 285561 (EXFRPB1BWF) | 230 V 1N 50/60 Hz 6,8 kW |
| 285563 (EXFREB1BWF) | 400 V 3 50/60 Hz 6,8 kW  |

#### Total Watts:

7.4 kW

### Key Information:

|                                  |                       |
|----------------------------------|-----------------------|
| Number of wells:                 | 1                     |
| Usable well dimensions (width):  | 170 mm                |
| Usable well dimensions (height): | 330 mm                |
| Usable well dimensions (depth):  | 500 mm                |
| Well capacity:                   | 7 lt MIN; 9 lt MAX    |
| Thermostat Range:                | 90 °C MIN; 185 °C MAX |
| External dimensions, Height:     | 930 mm                |
| External dimensions, Width:      | 200 mm                |
| External dimensions, Depth:      | 600 mm                |
| Net weight:                      | 35 kg                 |
| •                                | Integrated oil filter |