



BEVERAGE-AIR

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

DUAL TEMP UNDERCOUNTER

MODEL:
UCRF48AHC-1-SA-A

UCRF48AHC Undercounter Freezer/Refrigerator
Hydrocarbon Series

UCRF48AHC DUAL TEMP UNDERCOUNTER

3 Year Parts/Labor Warranty
Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION



- Stainless steel front, sides, doors, and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Dual Temp: left side freezer, right side refrigerator unit provide two different operating temperature zones for different types of products
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Internal thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves per door section
- Field reversible doors (hinge kit not included)

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- 3" Casters or 6" legs
- Low profile casters
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Freezer has an electric defrost, refrigerator has a non-electric defrost.
- Freezer maintains product temperature from -10°F and below
- Refrigerator maintains product temperatures between 36°F and 38°F




Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com



BEVERAGE-AIR


MODEL		UCRF48AHC-1-SA-A
EXTERNAL DIMENSIONAL DATA		
Width Overall		48"
Depth Overall (with handle & bumper)		32"
Height Overall (with casters)		34 1/2"
Number of Doors		2
Depth with Door Open 90°		52 1/4"
Door Opening (in)		19 1/2" x 21 5/8"
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)		(F) 5.31 (R) 5.31
Internal Width Overall (in)		(2) 21"
Internal Depth Overall (in)		15 3/8"
Internal Height Overall (in)		23"
ELECTRICAL DATA		
Full Load Amperes		(F) 2.5 (R) 2.0
REFRIGERATION DATA		
Horsepower*		(F) 1/4 (R) 1/10
Capacity (BTU/Hr)*		(F) 857 (R) 1110
SHIPPING DATA		
Gross Weight - Crated		295 lbs
Height - Crated		34"
Width - Crated		32"
Depth - Crated		52"

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.


Dual Temp Undercounter Model: UCRF48AHC-1-SA-A

Model Views


2" Top, sides and rear clearance is required

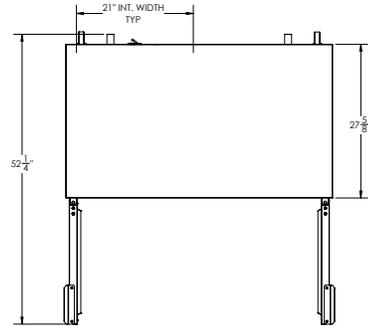

PLAN VIEW



ELEVATION VIEW



SIDE VIEW

*ELECTRICAL CONNECTION



115/60/1
NEMA-5-15P

Unit pre-wired at factory and include (2) 8' long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company



The Spirit of Excellence