

SF003-GB

MODEL CALDOBAKE S3 SF003-GB	<ul style="list-style-type: none"> • Electric convection oven 	<ul style="list-style-type: none"> • Temperature 30°C-260°C
	<ul style="list-style-type: none"> • Manual control 	



DESCRIPTION

Combi oven for fresh and frozen bakery, pastry and confectionary cooking processes; thanks to AIR.PLUS technology it obtains uniformity of baking in all the points of the single tray and in all the trays, and thanks to DRY.PLUS it ensures the texture of the baked products, allowing to obtain a dry and well-structured internal structure and a crisp and crumbly external surface.

STANDARD COOKING FEATURES

SETTINGS:

- **TEMPERATURE:** 30 °C – 260 °C.
- Manual Control
- 3 trays 242x342 Capacity

KEY FEATURES

- **DRY.PLUS:** Rapid extraction of humidity
- **AIR.PLUS:** Perfect distribution of the air and heat

STANDARD TECHNICAL FEATURES


- **Protek. Safe™** Double Glass Door
- Assisted opening and soft-close door
- Stainless steel ergonomic Door Handle
- Illuminated Cooking Chamber
- Stainless steel tray supports
- Stainless steel AISI 304 cooking chamber
- Degree of protection IP-X3
- Silicone polymer gasket
- Non-slip feet



SF003-GB

Views
Dimensions and Weights
Connection positions
Power supply

SF003-GB

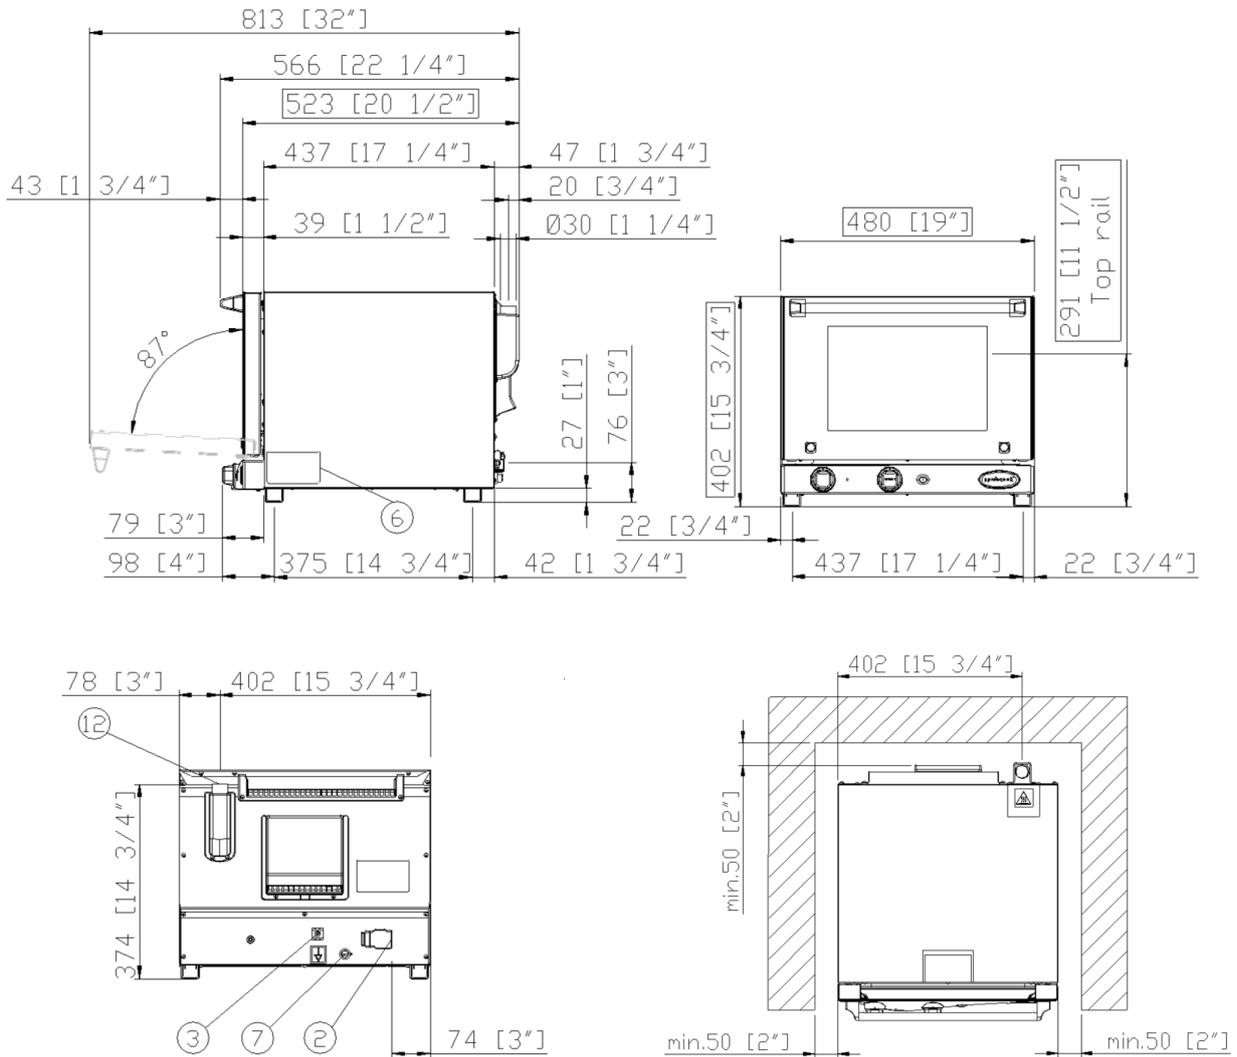

DIMENSIONS AND WEIGHT

Width	480 mm
Depth	566 mm
Height	402 mm
Weight	16 Kg
Pan Spacing	70 mm
Max Food Load	6 Kg
Cavity Dmensions	360x344x230 mm

POWER SUPPLY

Voltage	220-240 V
Phase	1PH+N+PE
Cycle	50Hz
Power	2,9 kW
Maximum Amp Draw	12 A
Power cable requirement	H07RN-F 3G 1.5 mm ²
Cord diameter	10 mm
Plug	BS1363


CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat
12	Hot fumes exhaust chimney

SF003-GB

Wiring diagrams

SF003-GB

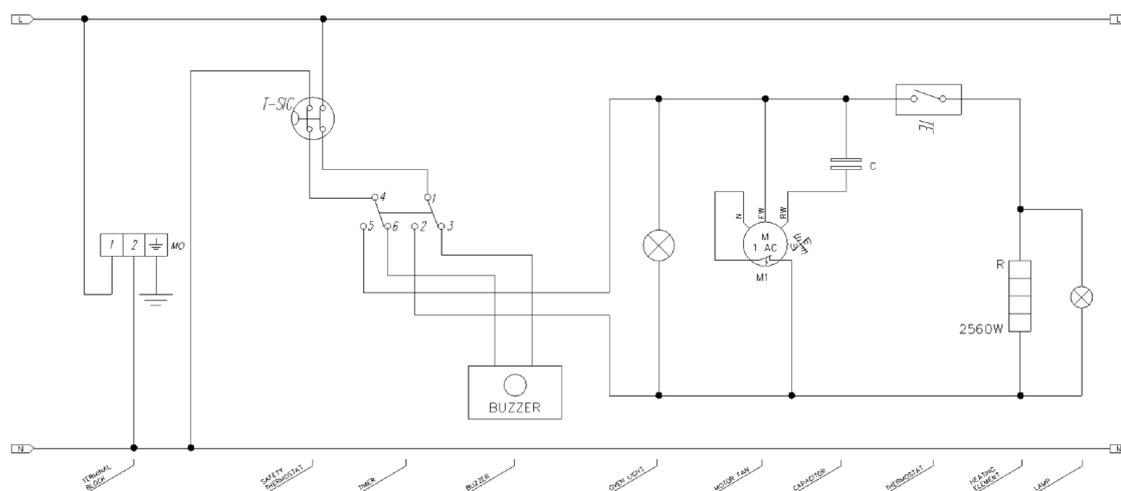

WIRING DIAGRAMS

μP	Door microswitch
BZ	Buzzer
C	Electric condenser
H	Oven light
IM	Reversing gear
K	Contactor
M	Motor
PR	Refit push button
TE	Thermostat
TM	Timer
TS	Safety thermostat