

# Spec sheet

## iCombi® Pro 10-half size E/G



### Capacity

- > Ten (10) Half-size sheet pans or Ten (10) Steam table pans or Ten (10) 1/1 GN accessories
- > Removable standard hinging rack with 2 5/8 inch rack spacing (68 mm)
- > Large selection of accessories for various cooking procedures, such as grilling, braising or baking
- > For use with 1/1, 1/2, 2/3, 1/3 GN accessories and optional baker's standard accessories (400 x 600 mm)

### Combi-steamer mode

- > Steaming 86 °F - 266 °F
- > Convection 86 °F - 572 °F
- > Combination of steam and convection 86 °F - 572 °F

### Description

Intelligent, connectable cooking system with the operating modes poultry, meat, fish, egg dishes/desserts, side dishes/vegetables, baked goods and finishing as well as the cooking methods roasting, cooking, baking and grilling.

- > Combi steamer as per DIN 18866 (in manual mode).
- > For most cooking processes used in commercial kitchens.
- > For using steam and convection, individually, one after the other, or combined.

Ventilation approvals: The electrical appliance conforms to the EPA 202 test in accordance with ANSI/NFPA 96 "Ventilation Control and Fire Protection of Commercial Cooking Operations" Refer to UL Listing KNLZ.E148536 (America) or KNLZ7.E148536 (Canada).

The following intelligent assistants are available:

### Intelligent assistant

iDensityControl  iProductionManager  iCookingSuite  iCareSystem 

#### iDensityControl

iDensityControl is the iCombi Pro's intelligent climate management. The interaction among intelligent sensors, a high-performance heating system and fresh steam generator, and active dehumidification ensures that the right cooking cabinet climate is always available. Intelligent air circulation ensures the best possible energy input into the food. Consequently, this ensures extraordinary productivity while maintaining high levels of food quality, even cooking and minimum energy consumption.

#### iCookingSuite

The iCookingSuite is the iCombi Pro's cooking intelligence. The user starts by selecting the right cooking path for the food, choosing from among seven operating modes and five cooking methods. Users also specify the desired cooking result. The unit suggests settings for browning and degree of doneness. Intelligent sensors detect the size, quantity and condition of the food. While the cooking path is in progress, the system adjusts key parameters like cooking cabinet temperature, airspeed, and cooking time accurately to the second. The selected desired results are achieved, yielding the best possible quality in the shortest possible time. It is possible to optionally influence the cooking sequence and adapt the cooking result. Users can change to iProductionManager or manual mode at any time. Thanks to iCookingSuite you can simply save time, raw materials, and energy while maintaining a standardized food quality without having to check the procedure.

#### iProductionManager

iProductionManager intelligently and flexibly organizes the production process. This includes which products can be prepared together on different trays, the ideal sequence of dishes, and monitoring the cooking sequence. iProductionManager supports users with prompts to load or unload dishes. Depending on kitchen processes you can freely position orders (up to two per level) or schedule them on the basis of a certain target time. iProductionManager arranges the sequence of dishes accordingly and automatically specifies the correct settings. Users decide whether dishes are cooked based on optimum energy consumption or a certain target time. Simple monitoring activities are no longer required, saving you working time and energy.

#### iCareSystem

The iCareSystem is the intelligent iCombi Pro cleaning and descaling system. It recommends the amount of chemicals and ideal cleaning stage from the nine available programs based on usage and any limescale in the steam generator. Ultra-fast interim cleaning cleans iCombi Pro in only 12 minutes, all cleaning programs can also run overnight without the need for supervision. The cooking system will then switch off automatically if desired. The iCareSystem is particularly efficient and environmentally friendly, consuming small quantities of phosphate-free care products, water, and energy. This means that the iCombi Pro is always hygienically clean without manual work and at minimal costs. Also available with optional cleaning-chemical storage system for fully autonomous cleaning.

## Unit description and functions

### Intelligent functions

- > Intelligent climate management that measures, adjusts and controls the humidity down to the exact percentage
- > The actual measured humidity in the cooking cabinet can be adjusted and viewed
- > Dynamic air turbulence in the cooking cabinet thanks to two intelligent, reversible, high-performance fan wheels with five fan wheel speeds, intelligently actuated and manually programmable
- > Intelligent cooking path regulation and automatic adjustment of cooking steps in order to achieve the target results, e.g., browning and degree of doneness, safely and efficiently - regardless of product size, load quantity, or who is using the unit
- > Monitoring accurate to the second and calculation of browning on the basis of the Maillard reaction to reproduce ideal cooking results
- > Adjust intelligent cooking methods or switch between iCookingSuite and iProductionManager for maximum flexibility
- > Intelligent cooking step to proof baked goods
- > Individual, intuitive programming of up to 1,200 cooking programs with up to 12 steps using drag-and-drop.
- > Easy transfer of cooking programs to other cooking systems through secure cloud connection with ConnectedCooking or via USB stick
- > iProductionManager, the automated, intelligent planning and controlling tool, organizes multiple cooking processes and mixed loads perfectly. Schedule gaps are closed automatically. Automatically optimize time and energy consumption in planning, or use target time preparation to start or finish dishes simultaneously. Full microwave power mode can be activated for maximum speed during peak traffic periods.
- > Visual indication of loading and removal requests using energy-saving LED lighting
- > Automatically resumes and optimally completes cooking processes following power outages lasting less than 15 minutes
- > Intelligent cleaning system suggests cleaning programs and the required amount of care products based on the degree of soiling within the cooking system
- > Display of the current cleaning and descaling status
- > Intelligent VarioSmokers control (accessory) by the cooking methods
- > Condensation/exhaust air hoods (accessories) with situational adjustment of the extraction performance and transfer of service messages.

### Cooking functions

- > High-performance steam generator for optimal steaming performance even at low temperatures below 212°F
- > Power-steam function: increased steaming power available for Asian applications
- > Integrated, maintenance-free grease separation system without an additional grease filter
- > Cool-down function to quickly cool down the cooking cabinet; additional fast cooling using internal water nozzle
- > Core temperature probe with six measuring points and automatic error correction in the event of incorrect positioning. Optional positioning tool for soft or very small cooking products (accessory)
- > Delta-T cooking for extremely gentle preparation with minimal cooking losses
- > Precise burst-steam injection; water quantities can be set to 4 different levels within a temperature range of 85°F – 500°F for convection or steam-convection combination modes
- > Digital temperature display, can be set to °C or °F, displays target and actual values
- > Cooking cabinet humidity and time displayed digitally; displays target and actual values
- > Time can be set to display in 12- or 24-hour format
- > 24-hour real-time clock with automatic adjustment for daylight savings time when connected to ConnectedCooking
- > Automatic pre-selected starting time with variable date and time
- > Integrated hand shower with automatic retraction and switchable spray/jet function
- > Energy-saving, long-lasting LED lighting in the cooking cabinet, with excellent color fidelity to allow quick determination of cooking progress
- > No-charge 4-hour RATIONAL certified chef assistance program

### Occupational and operating safety

- > Electronic safety temperature limiter for steam generator and convection heating
- > Integrated fan wheel brake
- > Contact temperature of the cooking cabinet door max. 163 °F
- > Use of Active Green cleaning tabs and Care tabs (solid cleaning agent) for ideal occupational safety levels
- > HACCP data storage and output via USB or optional storage and management in the cloud-based networking solution ConnectedCooking
- > Tested according to national and international standards for unsupervised operation
- > Maximum tray height must not exceed 63 inch when using a RATIONAL stand
- > Ergonomic door handle with right- / left-handed door opening and swing-shut function

### Networking

- > Integrated, IP-protected Ethernet interface for wired connection to the cloud-based ConnectedCooking networking solution
- > Integrated Wi-Fi interface for wireless connection to the cloud-based networking solution ConnectedCooking
- > Integrated USB interface for local data exchange
- > Cloud-based ConnectedCooking solution allows central unit management; recipe, shopping cart and program management; HACCP data management; maintenance management

### Cleaning and care

- > Automatic, water pressure-independent cleaning and maintenance system for cooking cabinet and steam generator
- > Nine cleaning programs for unsupervised cleaning, also overnight, with automatic cleaning and removal of limescale deposits within the steam generator
- > Ultrafast cleaning in only 12 minutes for practically uninterrupted, hygienic production
- > Automatic cleaning routine following power outages, ensuring that cooking cabinet remains free of cleaning agents even after the cleaning process has been canceled
- > Hygienic setup that is flush with the counter without feet for simple, safe cleaning

- > Triple glass pane cooking cabinet door with rear ventilation, thermally reflecting special coating and swiveling glass panes for easy cleaning
- > Inside and outside material: stainless steel DIN 1.4301, seamless hygienic cooking cabinet with rounded corners and optimized air flow
- > Glass and stainless steel surfaces allow easy, safe external cleaning; IPX5-class protection against spraying water in all directions
- > Monitoring option for automatic cleaning using the cloud-based ConnectedCooking networking solution

### Operation

- > High-resolution 10.1 inch TFT color display and capacitive touchscreen with self-explanatory icons for simple, intuitive operation with gestures like swiping and dragging
- > Acoustic prompts and visual messages when user action is required
- > Central dial with Push function for intuitive selection and confirmation of entries
- > User interface and help function can be set to over 55 languages
- > Basic national cuisine preferences can be selected regardless of language settings. Possible to select additional, local cuisine
- > Specially adapted cooking parameters for international or country-specific dishes can be selected and started regardless of unit language settings
- > Extensive search function including all cooking paths, application examples and settings
- > Context-sensitive support that always shows the current help content for the displayed screen content
- > Start application examples from help file
- > Simple selection of cooking paths using six operating modes and/or five cooking methods
- > Cockpit function to display information about the processes within a cooking path
- > Customization and control of user profiles to prevent operator errors
- > Interactive notifications regarding cooking paths, requested actions, intelligent functions and warnings thanks to Messenger

### Installation, maintenance and environment

- > Professional installation by RATIONAL-certified technicians recommended
- > Rear in-direct floor drain with air gap is required, and should be supplied in alignment with local code.
- > Adaptation to the installation site (height above sea level ) through automatic calibration
- > Operation without water softener and without additional manual descaling possible
- > Installation flush with the floor and wall through connection in the base area \*
- > Service diagnostic system with automatic messages, self test function for actively testing cooking system functions
- > Remote diagnosis via ConnectedCooking by certified RATIONAL service partners
- > 2-year RATIONAL warranty including parts, labor, and travel\*\*
- > Regular maintenance is recommended. Servicing by RATIONAL service partner according to manufacturer recommendations
- > Energy efficiency in accordance with ENERGY STAR tested and passed. Published at [www.energystar.gov](http://www.energystar.gov)

\* See the installation or planner manual for details

\*\* Terms and conditions apply, see manufacturer warranty statement at [www.rational-online.com](http://www.rational-online.com)

### Options

- > Hinging rack and air baffle for baker's standard accessories (400 x 600 mm)
- > Cooking cabinet door, left-hinged
- > MarineLine - marine version
- > SecurityLine - prison / security version
- > MobilityLine - mobile variant
- > HeavyDutyLine - particularly heavy-duty version
- > Integrated fat drain
- > Mobile oven rack package
- > Protection for control panel
- > Safety door lock
- > Lockable control panel
- > Integrated chemical storage system: iCareSystem AutoDose

## Technical specifications

### Dimensions and weights

| Dimensions (W x H x D)               |                                 |
|--------------------------------------|---------------------------------|
| Cooking system (body)                | 33 1/2 x 39 7/8 x 30 1/2 inches |
| Cooking system (total)               | 33 1/2 x 41 7/8 x 33 1/8 inches |
| Cooking system with packaging        | 36 3/4 x 49 1/4 x 37 5/8 inches |
| Maximum working height of top level* | ≤ 5 ft. 2 7/8 inches            |

\*when using a corresponding RATIONAL stand

| Weights                                  |        |
|------------------------------------------|--------|
| Maximum load size per level              | 33 lb  |
| Maximum total load capacity              | 99 lb  |
| Weight - electric unit without packaging | 287 lb |
| Weight - electric unit with packaging    | 333 lb |
| Weight - gas unit without packaging      | 328 lb |
| Weight - gas unit with packaging         | 375 lb |

### Electrical connection conditions

| Voltage 3 ph 208 V / 240 V |                                 |
|----------------------------|---------------------------------|
| Connected loads - electric | 18.9 kW                         |
| Steam power                | 18 kW                           |
| Convection power           | 18 kW                           |
| Maximum circuit breaker    | 70 A / 60 A                     |
| Running AMPS               | 52.5 A (208 V) / 45.5 A (240 V) |
| Cable diameter             | AWG 4 194°F                     |
| Voltage 3 ph 440 V / 480 V |                                 |
| Connected loads - electric | 18.9 kW                         |
| Steam power                | 18 kW                           |
| Convection power           | 18 kW                           |
| Maximum circuit breaker    | 35 A / 30 A                     |
| Running AMPS               | 24.8 A (440 V) / 22.7 A (480 V) |
| Cable diameter             | AWG 8 194°F                     |

### Connected loads - gas

| Natural gas G20                   |                    |
|-----------------------------------|--------------------|
| Nominal heat load, total          | 83500 BTU          |
| Nominal heat load, Steam mode     | 76000 BTU          |
| Nominal heat load, Hot Air mode   | 83500 BTU          |
| Required connection flow pressure | 6.5 – 10 inch w.c. |
| Liquid gas                        |                    |
| Nominal heat load, total          | 82000 BTU          |
| Nominal heat load, Steam mode     | 74500 BTU          |
| Nominal heat load, Hot Air mode   | 82000 BTU          |
| Required connection flow pressure | 10 – 15 inch w.c.  |

3/4" NPT with 3/4" gas shut off

Additional gas types and voltages available on request

### Connected loads - gas

| Voltage 1 ph 208 V    |        |
|-----------------------|--------|
| Connected loads - gas | 0.9 kW |
| Breaker               | 15 A   |
| Running AMPS          | 4.3 A  |
| Voltage 1 ph 120 V    |        |
| Connected loads - gas | 0.9 kW |
| Breaker               | 15 A   |

|              |       |
|--------------|-------|
| Running AMPS | 7.5 A |
|--------------|-------|

All gas units are supplied with a 6 ft cord.

### Connection conditions water

|                                      |                               |
|--------------------------------------|-------------------------------|
| Connection                           | 3/4" GHT                      |
| Supply minimum                       | 1/2" ID Drinking Quality Cold |
| Water pressure (flow pressure), each | 14.5-87.0 psi                 |
| Maximum flow rate per cooking system | 3 gal/min                     |
| Water drain, each                    | 2" OD                         |
| Max short-term amount of wastewater  | 0.11 gal/sec                  |

Use only high-temperature resistant drain pipe

### Water quality requirements

Untreated water can be 0 to 24.5 gr/gal (0 to 420ppm) hardness. We do not recommend treated water hardness < 5 gr/gal (86ppm) because the water could be corrosive. Sodium ion exchangers are not recommended; H+ Ion exchange systems are recommended. Water that does not meet the following minimum standards will require the proper conditioning

| Contaminant                 | Water Requirements       | If > than recommended |
|-----------------------------|--------------------------|-----------------------|
| Sand / Particles            | < 15 µm                  | Particle filter       |
| Chlorine (Cl <sub>2</sub> ) | < 0.012 gr/gal (0.2 ppm) | Active carbon filter  |
| Chloride (Cl <sup>-</sup> ) | < 4.68 gr/gal (80 ppm)   | RO                    |

All RATIONAL iCombi Pro & Classic models meet the requirements for LEED, IGCC and any local codes that have adopted them, based on water consumption and efficiency.

| Model      | XS  | 6 half size | 6 full size | 10 half size | 10 full size | 20 half size | 20 full size |
|------------|-----|-------------|-------------|--------------|--------------|--------------|--------------|
| gal/hr     | 0.9 | 1.8         | 3.5         | 3.3          | 5.9          | 6.4          | 9.2          |
| gal/hr/pan | 0.3 | 0.3         | 0.3         | 0.3          | 0.3          | 0.3          | 0.2          |

### Connected loads - exhaust air and thermal load

|                        |          |
|------------------------|----------|
| Latent heat load       | 3269 BTU |
| Sensible heat emission | 4344 BTU |
| Sound level (electric) | 55 dBA   |
| Sound level (gas)      | 60 dBA   |

### Connection loads - data

|                     |                   |
|---------------------|-------------------|
| LAN data interface  | RJ45              |
| WiFi data interface | IEEE 802.11 a/g/n |

### Minimum distances at installation

#### Clearance Requirements

To facilitate servicing, we recommend leaving a 20" (500 mm) gap on the left-hand side of the unit. If there is not 20" (500 mm) left side clearance available, provisions for moving the unit to the left for service access must be made. Such provisions include, but are not limited to, having quick connections (water, gas, etc.) and lengthened electrical connections with flexible cords.

If there are no external heat sources acting on the unit, there should be at least 2" (50 mm) of clearance on either side of the unit. On the back, single units and electric Combi-Duo vent pipe can be mounted flush with the wall. 2" rear clearance from the gas Combi-Duo exhaust gas box. If a high temperature heat source is on the left or right side of the unit, clearance of at least 14" (350 mm) must be maintained on the respective side. This clearance may be reduced to 2" (50 mm) if a heat shield is used (see accessories).

Recommended clearance from unobstructed rear exhaust pipes and any surface collecting grease or flammable material; 16" (400 mm) gas, 10" (254 mm) electric. It is recommended to have a hood overhang of 6" (150 mm) to 18" (450 mm) at the front of the unit and 6" (150 mm) on the

sides if installed at the end of the cooking line. Please refer to the Installation Manual for additional technical data and for instructions on installation and setup.

### Installation conditions

- > Observe all local and country-specific standards and regulations regarding the installation and operation of commercial cooking appliances. The local standards and regulations for interior ventilation systems must also be taken into account.
- > To use ConnectedCooking, an RJ45 network socket or a WLAN connection option (IEEE 802.11 a/g/n) must be in place on-site. For optimal performance, a data rate of at least 100 MB/s is required.
- > Do not connect to any receptacle that local code requires protection by a UL 943 listed Class A GFCI. The device is approved for field hardwiring per local code.





### Approvals



### NSF Certification

iCombi Pro (LM100) and iCombi Classic (LM200) are NSF-certified, shown on the NSF list.





## Technical drawing, electrical

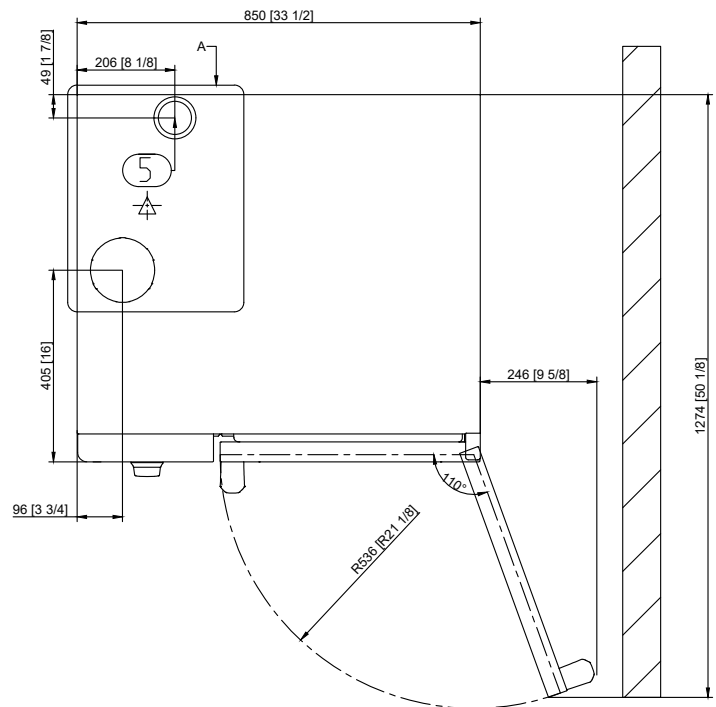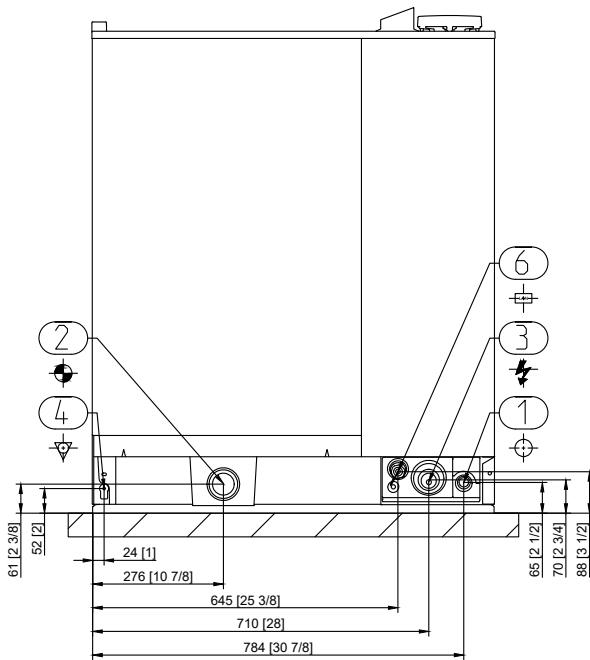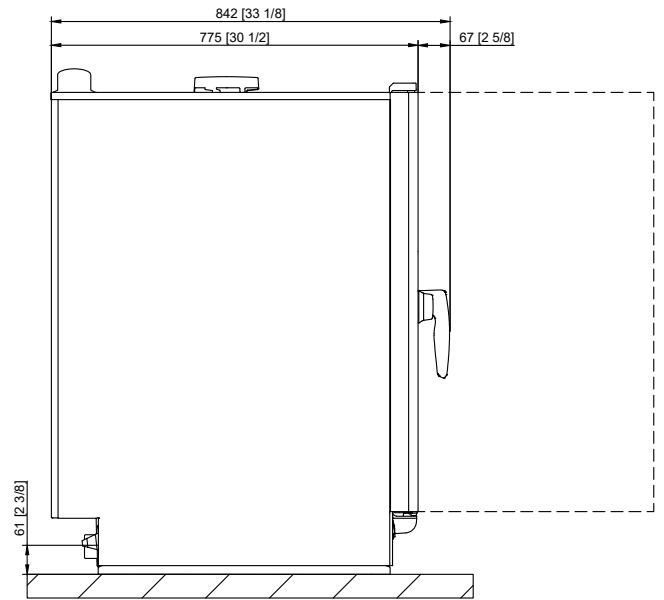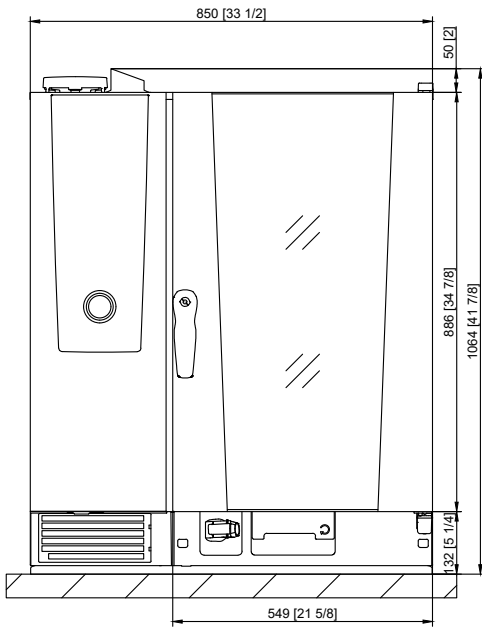

|   |                       |
|---|-----------------------|
| 1 | Water inlet           |
| 2 | Water drain           |
| 3 | Electrical connection |
| 4 | Equipotential bonding |
| 5 | Ventilation pipe      |



## Technical drawing, gas

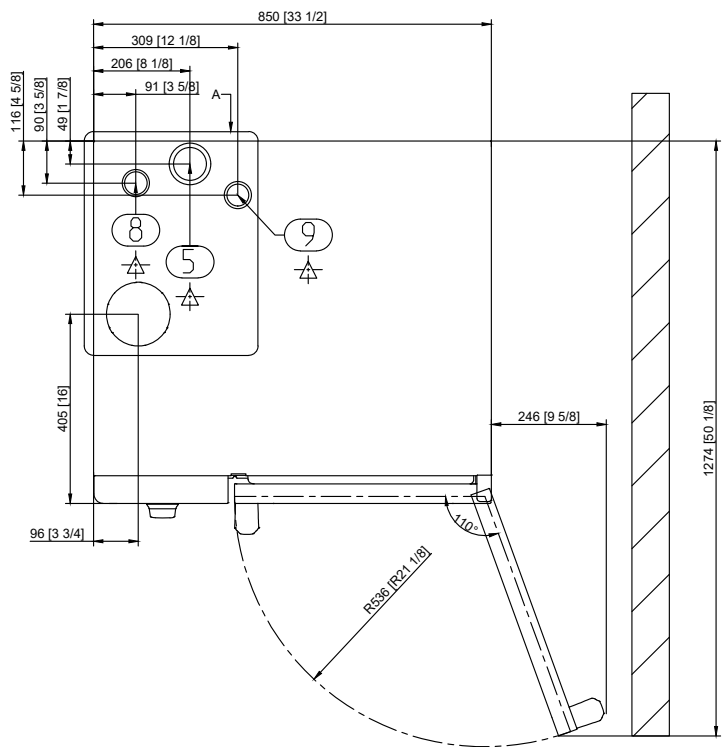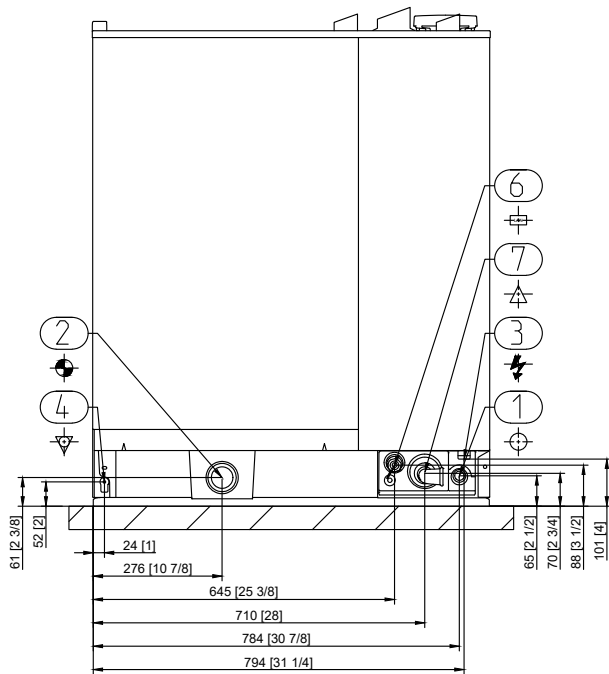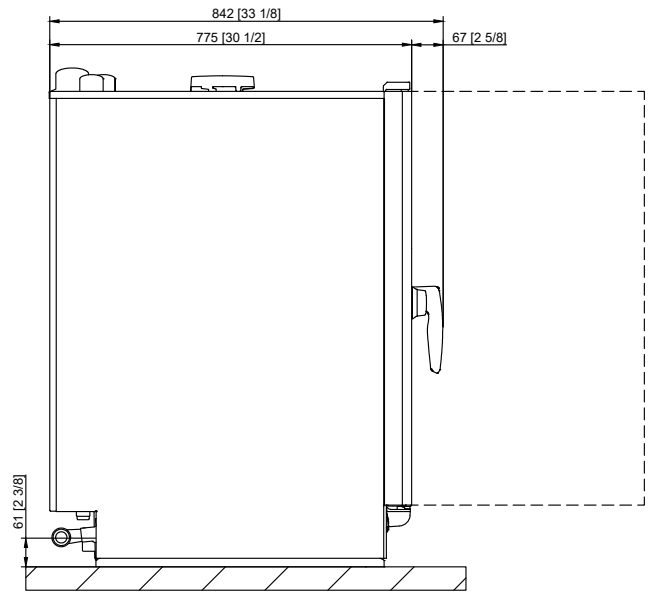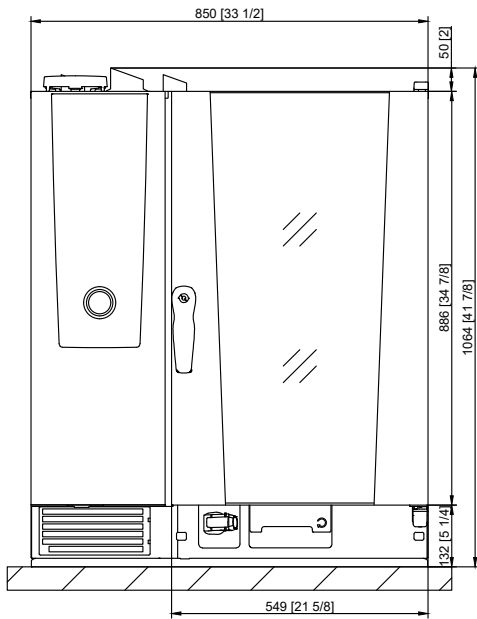

|   |                       |
|---|-----------------------|
| 1 | Water inlet           |
| 2 | Water drain           |
| 3 | Electrical connection |
| 4 | Equipotential bonding |
| 5 | Ventilation pipe      |

|   |                               |
|---|-------------------------------|
| 6 | Ethernet interface            |
| 7 | Gas connection                |
| 8 | Exhaust pipe gas (steam)      |
| 9 | Exhaust pipe gas (convection) |

## Accessories

|                                                                                                                                                    |                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| RATIONAL Active Green cleaning agent tabs – guarantee the best cleaning performance                                                                | Item no. 56.01.535                                            |
| RATIONAL Care tabs – effectively prevent limescale deposits                                                                                        | Item no. 56.00.562                                            |
| RATIONAL Active Green cleaner cartridges with iCareSystem AutoDose option                                                                          | 56.01.912 Active Green cleaner cartridges/6 per box           |
| RATIONAL Care cartridges with iCareSystem AutoDose option                                                                                          | 56.01.914 Active Green Care cartridges/6 per box              |
| Stands are available in various versions - standard, with casters, or with anchorable stainless steel feet                                         | See Cooking Systems and Accessories catalog                   |
| Run-in rail for mobile rack and mobile plate rack Size 6-half size, 10-half size                                                                   | Item no. 60.75.115                                            |
| Condensation breaker – diverts steam and vapors to an existing exhaust air system<br>Sizes 6-half size, 10-half size, 6-full size and 10-full size | Item no. 60.72.592                                            |
| RATIONAL USB stick – to securely transfer cooking programs and HACCP data                                                                          | Item no. 42.00.162                                            |
| Finishing system for banquets Size 10-half size, 26 plates                                                                                         | Item no. 60.11.629                                            |
| Finishing system for banquets Size 10-half size, 32 plates                                                                                         | Item no. 60.11.628                                            |
| Hinging racks – Size 10-half size                                                                                                                  | Item no. 8 racks 60.11.547                                    |
| Heat shield – for installing a unit near a heat source, e.g. a grill - Size 10-half size                                                           | Item no. left side 60.75.773<br>Item no. right side 60.75.771 |
| Mobile catering stand - especially for heavy mobile catering usage                                                                                 | Item no. 60.31.164                                            |
| Mobile oven rack and mobile plate oven rack – for simple loading outside the cooking system                                                        | See Cooking Systems and Accessories catalog                   |
| Transport trolley for mobile rack and mobile plate rack - height-adjustable - Sizes 6-full size, 10-full size                                      | Item no. 60.75.606                                            |
| Transport trolley for mobile rack and mobile plate rack - standard - Sizes 6-half size, 10-half size                                               | Item no. 60.74.000                                            |
| UltraVent recirculating hood - for Size 6-half size, 10-half size electric units only                                                              | Item no. 60.67.179                                            |
| UltraVent Plus recirculating hood - for Size 6-half size, 10-half size electric units only                                                         | Item no. 60.76.177                                            |
| Stackable Combi-Duo kit Size 6-half size E/G on Size 6-half size E or Size 10-half size E                                                          | Item no. 60.73.991                                            |
| RATIONAL Single Water Filter - for all single models and Combi-Duo XS/XS, 6-half size/6-half size and 6-half size/10-half size                     | Item no. 1900.1154US                                          |

We offer a wide range of cooking accessories to help you achieve ideal cooking results; for more information, please consult our accessories brochure, ask your dealer, or visit [www.rational-online.com](http://www.rational-online.com)

|         |                                                                                                                                                                                                                                                                                                    |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Planner | RATIONAL USA Inc.                                                                                                                                                                                                                                                                                  |
|         | 1701 Golf Road, Suite C-120, Commerce Rolling Meadows, IL 60008<br>Toll Free: 888-320-7274<br>Fax: 847-755-9583<br>Email: <a href="mailto:info@rational-online.com">info@rational-online.com</a><br>Visit us on the internet: <a href="http://www.rational-online.com">www.rational-online.com</a> |