

Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

### C-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR




**MODEL HINGING**  
 CLBC4-R Right  
 CLBC4-L Left

### SPECIFICATIONS

DIMENSIONAL DATA	
Capacity cu. ft.	9.3 (263.4 L)
Length in.	54-1/8 (137.5 cm)
Depth in.	35-15/16 (91.3 cm)
Overall Height in. <sup>2</sup>	31-13/16 (80.8 cm)
# Shelves	4
Pan Capacity	(4) 18" x 26" (8) 12" x 20"
Capacity lbs.	80 (36.3 kg)
ELECTRICAL DATA	
Horsepower <sup>1</sup>	1
Amps	16
Voltage	115/60/1
NEMA	5-20P
# Ground Feed Wires	3
REFRIGERATION DATA	
Refrigerant	R-290
Charge Amount oz.	5.3 (150 g)
BTU	4510

### PLAN VIEW

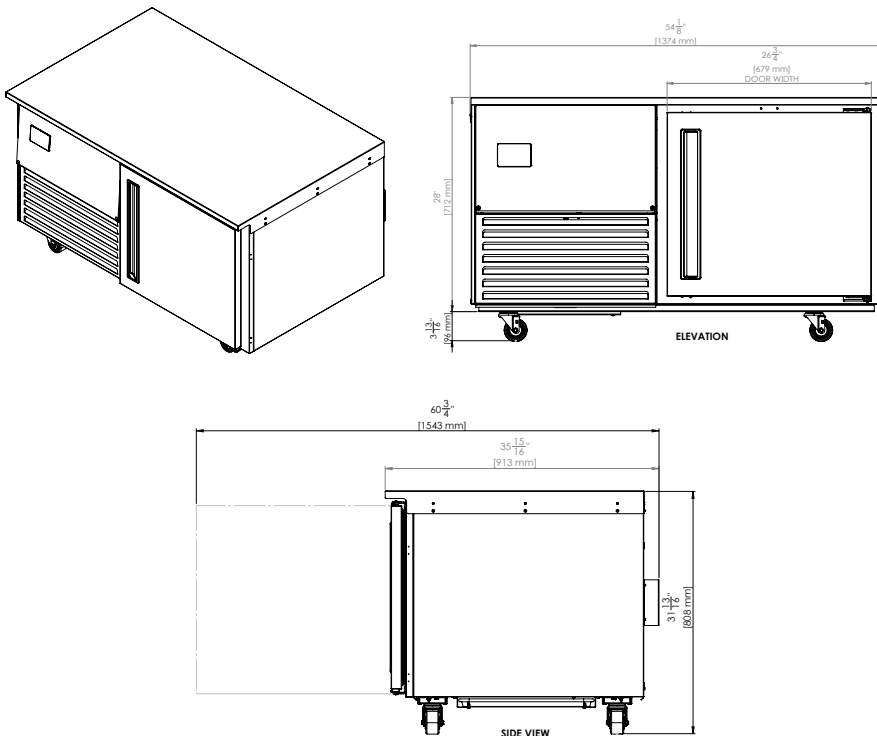

When ordering please specify:  
 Voltage, Hinging, and Options

NEMA 5-20P

1. Based on 90°F ambient & 0°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.



Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



# C-SERIES

## 4-LEVEL UNDERCOUNTER BLAST CHILLER



Project Name:	Location:	AIA #:	
Item #:	Qty:	Model #:	SIS #:

### REFRIGERATION SYSTEMS

- Self-contained, left-hand refrigeration system uses environmentally friendly, minimal GWP R-290 refrigerant
- Quickly and safely chills hot food directly from the oven to under 41° F (5° C)
- Easy to clean, front-facing condenser coil
- Thermostatic expansion valve metering device
- High speed evaporator fans
- Automatic hot gas defrost

### CONTROLLER

- 2.8" water-resistant, digital display with (5) capacitive keys is front-mounted and easy to use
- (2) chill modes: hard chill and soft chill
- Program by adjustable product target temperatures; 40-32° F (5-0° C) or cycle times

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Exterior back and bottom are constructed of heavy gauge galvanized steel
- (1) water-proof probe provided; monitors cycle progress
- Both the cabinet & door is insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane
- A set of (4) 4" (10.2 cm) high casters; on adjustable channel system
- 8' (2.4 m) cord & plug provided

### DOOR

- Stainless steel gasket-protecting door pan
- Door is self-closing with a stay-open feature
- Magnetic, snap-in door gasket
- Anti-condensate heaters located behind door opening

### INTERIORS

- (4) epoxy-coated wire shelves

### FACTORY-INSTALLED OPTIONS

- Set of (4) 6" (15.2 cm) high casters
- Set of (4) 8" (20.3 cm) high casters
- Set of (4) 6" (15.2 cm) high legs
- 4" (10.2 cm) high stainless steel backsplash (refer to spec sheet TR36327 for model CLBC4-WT)

### WARRANTY

A six-year parts and labor warranty, an additional one-year compressor parts warranty (for a total of seven years) and a three-year evaporator coil parts and labor warranty are provided standard

### **ESTIMATED PERFORMANCE CHART**

Temp. Zone	Chill Time (minutes)	Product Load (lbs.)
160°F to 40°F	90	32
	120	48
135°F to 40°F	240	80

CAD and/or Revit Files Available

<https://traulsen.klccad.com>

Approved by:	Approved by:	Date:
--------------	--------------	-------