

Master Series Gas XPress Grill

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Master Series Gas XPress Grill

Models

- XPG12



Model XPG12
Shown with low-profile grease cans



90 degree
NEMA plug

Standard Features

- Programmable control for each cooking lane precisely controls:
 - Automatic lifting and lowering of upper platen
 - Cooking gap and time
 - EasyTouch™ screen design is simple and intuitive with Press and Go interface
- Advanced temperature control, smart anticipation versus on-off
 - Eliminates temperature overshoot and undershoot
 - Increases temperature uniformity with five independently controlled heat zones -- three on plate and two on platen
- Recipes are programmed by setting grill temperature, platen temperature, cooking gap up to 2 inches (5 cm) and cook time
- USB interface to update menus
- User interface provides advanced diagnostics and error logging for ease of service and increased first-time fix
- Stainless steel front, top and sides
- Towel bar with bun pan lip
- Stainless steel dual side grease collectors
- Splash guards
- Swivel casters (4) with front brakes
- Hatchless cowl for protection from water during cleaning
- IPX4 water resistant rating
- Two-year limited parts and labor (USA & Canada)
- Cleaning kit with high temperature grill cleaner and cleaning tools/accessories, provided with every grill.

Optional

- Universal Tool Holder (1 or 2)
- UHC tray holder

Specifications

The XPress Grill's upper and lower grill plates cook both sides simultaneously, reducing cook times by up to 50%. Upper grill plate is automatically raised and lowered by a lift system powered by a quiet actuator.

Lower griddle plate made of 3/4" (19mm) thick carbon steel, machine ground and highly polished.

Lower grill plate heated by one electric heating element and two gas burners.

Upper platen heated by nickel plated cast aluminum electric heating elements.

Electric top heater provided with replaceable quick release Teflon sheets. Available in three phase power for Delta or Wye electrical systems.

Voltage sensing detects brownouts and electrical input issues. Power calibration feature adjusts power output

based on electrical system voltage.

Available with CSA approvals for natural or propane gas.

Available with CE approvals for G20, G25, G25.3, G30, and G31 gas.






All have NSF approval.

Grill can be installed at high elevation (4,501 - 12,000 ft). Be sure to specify installation elevation when ordering.

Installation with zero clearance against non-combustible surfaces.

NOTE: Grills supplied with casters and installed with flexible gas hose must be installed with an approved restraining device.



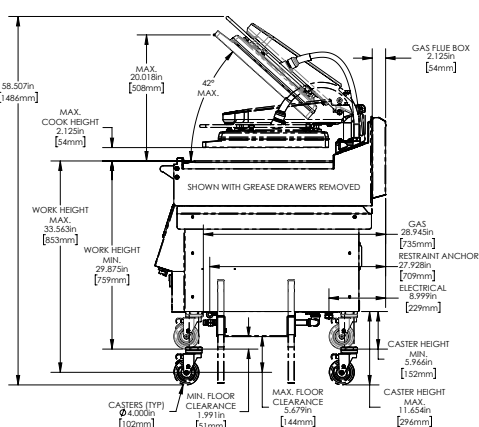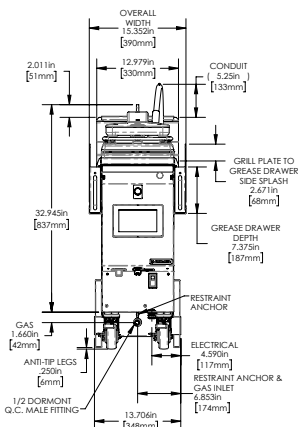

Weight

Product (grill only), 492lbs.
Packaged for shipping (accessories included), 558lbs.

Electrical Input Specification - DELTA

Model	Volts 3 Ph 50/60 Hz	Total Current (A)			Power (kW)
		L1	L2	L3	
XPG12 1 Platen	200V	14.4	17.0	4.8	3.5
	208V	14.0	16.6	4.9	3.5
	220V	12.6	15.2	4.8	3.4
	230V	11.8	14.0	4.8	3.5
	240V	11.8	14.0	4.8	3.5

Cords - DELTA

Country	Factory Installed	Plug Options
USA	Yes	NEMA 30A. right angle
Canada	Yes	NEMA 30A. right angle
Other	No	Customer Provided

For pin & sleeve plug, order installation kit

Gas Specifications for CSA Approved Models

Gas Type	Total Input	Supply Pressure	Manifold Pressure
	BTU	"W.C.	W.C.
Natural Gas	24,000	7.0	4.0
Propane	23,000	11.0	4.0

Valid for units installed up to 4,500 feet (1,372 meters) above sea level.

Electrical Input Specification - WYE

Model	Volts 3 Ph 50/60 Hz	Total Current (A)			Power (kW)
		L1	L2	L3	
XPG12 1 Platen	220V/380V	12.6	4.7	0.1	3.4
	230V/400V	11.8	4.7	0.1	3.5
	240V/415V	11.8	4.7	0.1	3.5

Cords - WYE

Country	Factory Installed	Plug Options
Various	Yes	IEC 32A Pin & Sleeve

Gas Specifications for CE Approved Models

Gas Type	Group	Total Input	Supply Pressure	Manifold Pressure
		kW	mbar	mbar
G20 Natural Gas	H, E	6.4	20/25	10.0
G25 Natural Gas	L, LL, E	6.4	20/25	13.7
G25.3 Natural Gas	K	6.4	20/25	13.7
G31 Propane	P	6.8	30/37/50	10.0
G30 Butane	B	7.0	30	8.7
G30/31 LPG	B/P	7.0	30/50	8.7

Valid for units installed up to 4,500 feet (1,372 meters) above sea level.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8052
08/24

