



# C-SERIES

## 4-DRAWER REFRIGERATED EQUIPMENT STAND



|               |           |          |
|---------------|-----------|----------|
| Project Name: | Location: | AIA #:   |
| Item #:       | Qty:      | Model #: |
|               |           | SIS #:   |

### C-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



Representative, 84" model shown

### 72" & 84" WIDE MODELS

CLES-72HT-ME / CLES-72HT-BN

CLES-84HT-ME / CLES-84HT-BN

(-ME suffix indicates marine edge / -BN indicates bullnose top)

### SPECIFICATIONS

#### DIMENSIONAL DATA

|                            |                                                |
|----------------------------|------------------------------------------------|
| Length in.                 | 72 (182.9 cm)   84 (213.4 cm)                  |
| Depth in.                  | 34-1/8 (86.7 cm)                               |
| OA Height in. <sup>2</sup> | 26-5/16 (64.3 cm)                              |
| Max Top Load Capacity lbs. | 72"   1200 (544.3 kg)<br>84"   1500 (680.4 kg) |

#### ELECTRICAL DATA

|                         |          |
|-------------------------|----------|
| Horsepower <sup>1</sup> | 1/5      |
| Amps                    | 4.5      |
| Voltage                 | 115/60/1 |
| NEMA                    | 5-15P    |

#### REFRIGERATION DATA

|                   |              |
|-------------------|--------------|
| Refrigerant       | R-290        |
| Charge Amount oz. | 2.3 (65.2 g) |
| BTU/HR            | 2194         |


When ordering please specify:  
Voltage and Options



NEMA 5-15P


1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.

72" Model

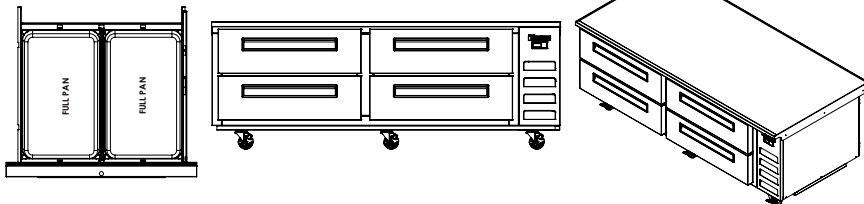



### PLAN VIEW

84" Model

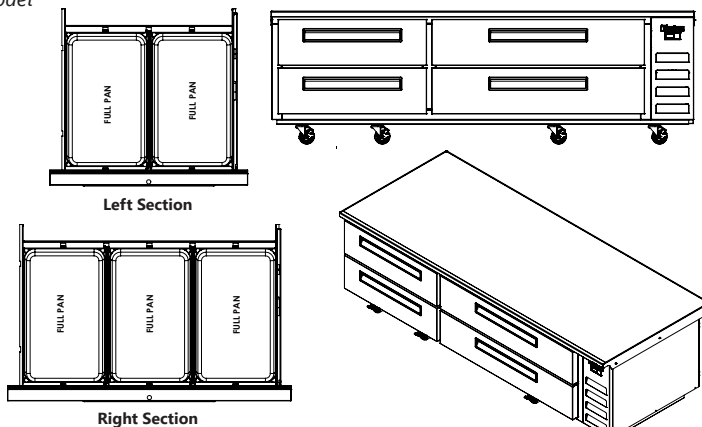

Left Section

Right Section

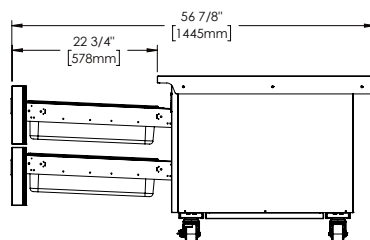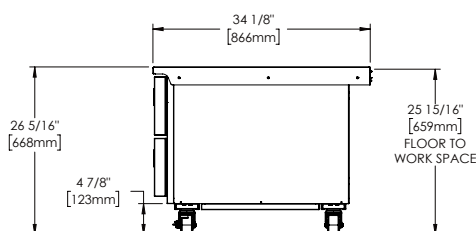

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



# C-SERIES

## 4-DRAWER REFRIGERATED EQUIPMENT STAND



|               |           |          |        |
|---------------|-----------|----------|--------|
| Project Name: | Location: | AIA #:   |        |
| Item #:       | Qty:      | Model #: | SIS #: |

### REFRIGERATION SYSTEM

- Self-contained, side-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Front-breathing system allows zero-clearance installation
- High performance, balanced system operates at 32-38°F (0-3.3°C) to maintain consistent, food-safe temperatures
- Water-resistant microprocessor control with an LED display
- Capillary tube metering device
- High humidity evaporator coil located outside the food zone
- Non-electric condensate evaporator

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Stainless steel top with front marine edge; 90° side and rear edges; -ME suffix following model number indicates indicates marine edge
- Exterior back and bottom are constructed of heavy gauge galvanized steel
- Cabinet and drawers are insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane
- Side, front and rear access panel for easy service and maintenance access
- A set of (6) on CLES72 or (8) on CLES84 4" (10.2 cm) high plate casters; on adjustable channel system
- 9' (2.4 m) cord, plug and plug retainer provided

### DRAWERS

- Foamed-in-place, recessed handles
- Easily removable drawer for cleaning
- Heavy gauge stainless steel drawers and drawer slides
- Magnetic, snap-in drawer gaskets

### INTERIORS

- Accommodates (2) full size 6" deep pan per drawer; supplied by others (CLES72)
- Accommodates (3) full size 6" deep pan per drawer in right section and (2) full size 6" deep pan per drawer in left section; supplied by others (CLES84)

### FACTORY-INSTALLED OPTIONS

- Set of (4) 3" (7.6 cm) casters
- Set of (4) 6" (15.2 cm) casters
- Set of (4) 6" (15.2 cm) stainless steel legs
- -BN suffix following model number indicates indicates bullnose top

### WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard



<https://traulsen.klccad.com>

|              |              |       |
|--------------|--------------|-------|
| Approved by: | Approved by: | Date: |
|--------------|--------------|-------|