



Project _____

Item # _____

Quantity _____

Flav-R-Fresh® Impulse Display Cabinets

Models: FDWDE-1, -1X, -2, -2X

Hatco has a profitable way to create impulse food sales with the Flav-R-Fresh® Holding and Display Cabinet. Controlled moisturized heat lets you display and hold hot foods longer using minimum counter space.

The Hatco Flav-R-Fresh has separate heat and humidity controls to keep crisp foods crisp and moist foods moist, not just for minutes but for hours. It holds everything from hot pretzels to 381 mm pizzas, croissants to bagels, and even hot dogs and meat pies.

Components, controls and a water reservoir are located at the top for easy access. A red light indicates a low water level and a green light shows the humidity cycle.

Models with two doors are available for pass-through convenience and a variety of merchandising racks help enhance food appeal.

The Hatco Flav-R-Fresh is ideal for restaurants, pizzerias, convenience stores, concession stands, snack bars and kiosks.

Standard features

- Full-view display with tempered glass sides and door
- A teflon coated, incandescent light enhances food appeal while safeguarding food products from bulb breakage
- Internal thermometer indicates cabinet temperature
- Single- or double-door opening models provide fast access to food racks
- Merchandising signs are available to help promote product

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.



FDWDE-1 with rotating 4-tier circle rack and accessory pans



FDWDE-1X with stationary 4-shelf multi-purpose rack

Options (available at time of purchase only)

Designer Colors

Non-standard colors are non-returnable –

Clear Anodized Aluminum standard

- Warm Red
- Black
- Gray Granite
- White Granite
- Navy Blue
- Hunter Green
- Antique Copper

- 152 mm Merchandising Display Sign Holder (control side only) (sign not included)
- 76 mm One-Sided Merchandising Display Sign Holder (one per side, three max) (sign not included)
- 162 mm One-Sided Merchandising Display Sign Holder (one per side, three max) (sign not included)

Accessories

- 102 mm Adjustable Legs
- Motorless Rack Coupling (FDWD-1X -2X only)
- 4-Tier Circle Rack (requires Coupling for -1X and -2X models)
- 4-Shelf Multi-Purpose Rack
- 3-Tier Pretzel Tree (requires Coupling for -1X and -2X models)

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350




www.hatcocorp.com | support@hatcocorp.com | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)





Flav-R-Fresh® Impulse Display Cabinets

Models: FDWDE-1, -1X, -2, -2X

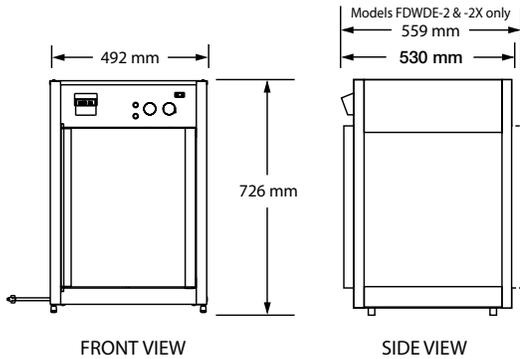

SPECIFICATIONS Impulse Display Cabinets

The shaded areas contain electrical information for International models

Model ^o	Type	Dimensions (W x D x H*)	Volts	Watts	Amps	Plug	Ship Weight*
FDWDE-1	1 Door with 4-tier Circle Rack with motor	492 x 530 x 727 mm	100	1440	14.4	NEMA 5-15P	38 kg
			120	1420	11.8	NEMA 5-15P	38 kg
			220	1470	6.7	CEE 7/7 Schuko or BS-1363	38 kg
			220-230	1470-1607	6.8-7.0	CEE 7/7 Schuko	
			230-240	1350-1470	5.9-6.1	BS-1363 or AS 3112	
FDWDE-1X	1 Door with 4-shelf Multi-Purpose Rack without motor (not available for retrofit)	492 x 530 x 727 mm	100	1440	14.4	NEMA 5-15P	38 kg
			120	1420	11.8	NEMA 5-15P	38 kg
			220	1470	6.7	CEE 7/7 Schuko or BS-1363	38 kg
			220-230	1470-1607	6.8-7.0	CEE 7/7 Schuko	
			230-240	1350-1470	5.9-6.1	BS-1363 or AS 3112	
FDWDE-2	2 Doors with 4-tier Circle Rack with motor	492 x 559 x 727 mm	100	1440	14.4	NEMA 5-15P	40 kg
			120	1420	11.8	NEMA 5-15P	40 kg
			220	1470	6.7	CEE 7/7 Schuko or BS-1363	40 kg
			220-230	1470-1607	6.7-7.0	CEE 7/7 Schuko	
			230-240	1350-1470	5.9-6.1	BS-1363 or AS 3112	
FDWDE-2X	2 Doors with 4-shelf Multi-Purpose Rack without motor (not available for retrofit)	492 x 559 x 727 mm	100	1440	14.4	NEMA 5-15P	40 kg
			120	1420	11.8	NEMA 5-15P	40 kg
			220	1470	6.7	CEE 7/7 Schuko or BS-1363	40 kg
			220-230	1470-1607	6.7-7.0	CEE 7/7 Schuko	
			230-240	1350-1470	5.9-6.1	BS-1363 or AS 3112	

^o Non-humidified cabinets available, unit will only operate in dry mode.

• Height includes standard 25 mm legs.

* Shipping weight includes packaging.

CABINET OPENING


400 W x 502 H mm.

CORD LOCATION


Facing controls, right-hand side panel, lower right corner.

PLUG CONFIGURATIONS


NEMA 5-15P




CEE 7/7 Schuko



BS-1363



AS 3112



PRODUCT SPECS

Flav-R-Fresh® Impulse Display Cabinets

The humidity controlled Impulse Display Cabinet shall be a Flav-R-Fresh® Model ... rated at ... volts and ... watts, as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The cabinet shall have ... door(s), tempered glass sides, a stationary rack (or a revolving display) and incandescent display light. It shall include a water reservoir,

a humidity selector switch, a temperature selection dial, an On/Off switch, and indicating lights. A 1829 mm cord with plug shall be attached.

Accessories shall include 102 mm legs, merchandising racks and a motorless rack coupling for two door units.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350



www.hatcocorp.com | support@hatcocorp.com | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Chat](#)