

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990059

MODELLO
D73/10CPE

SERIE
DIAMANTE70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

Safety pressure switch to prevent activation of heating without water in the tank.

Water loading by means of solenoid valve.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990059

MODELLO
D73/10CPE

SERIE
DIAMANTE70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990059
DEFINITION	D73/10 CPE PASTA COOKER EL. M60 1V.42LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	66,800 Kg
VOLUME (net)	0,381
PACKAGE LENGTH	660,000 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,645 m3
GROSS PACKING WEIGHT	79,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	D73/10 CPE

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project:
 Rev:
 Zone:
 Location:




CODICE
CR0990059

MODELLO
D73/10CPE

SERIE
DIAMANTE70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

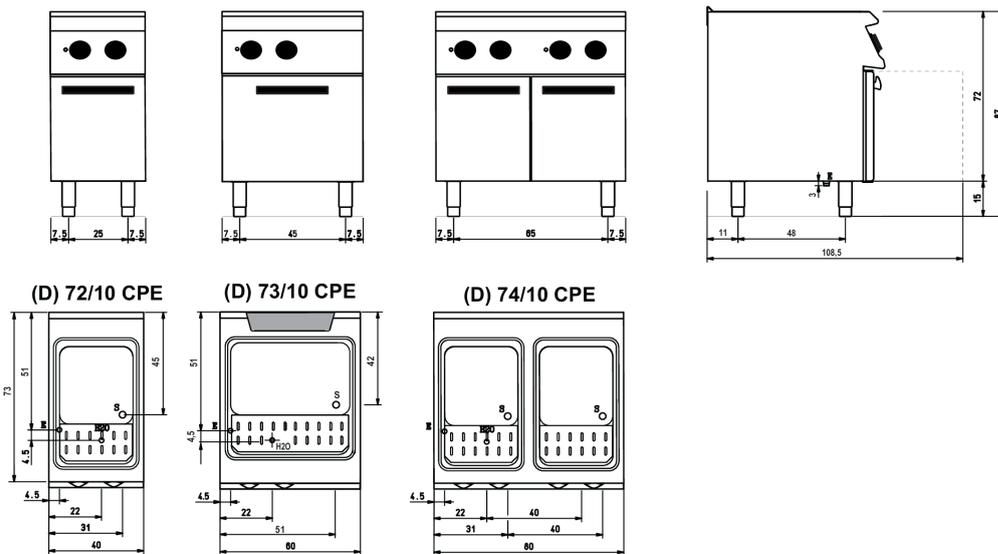

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Attacco scarico acqua - Wasserablauf - Water outlet
 Vidange de l'eau - Desaguadero - Wateraftapaansluiting
EN 10226-1 R 1

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990059

MODELLO
D73/10CPE

SERIE
DIAMANTE70

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Safety pressure switch to prevent activation of heating without water in the tank.



Water loading by means of solenoid valve.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



ELECTRIC PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990059

MODELLO
D73/10CPE

SERIE
DIAMANTE70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1356219	CCP13F60	Basket 16x28x18 cm GN1/3 FOR D93/10 CP.
CR0999229	7KIT-A	PASTA COOKER KIT
CR0999239	7KIT-B	PASTA COOKER KIT
CR0999249	7KIT-C	PASTA COOKER KIT
CR0789950	96KIT-A (93....)	Bath Test Kit 96KIT-A (93....)
CR0789960	96KIT-B (93....)	Bath Test Kit 96KIT-B (93....)
CR0592789	ZF6	
CR0592830	ZG	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0599649	7ZL	