

# ELECTRIC MANUAL BRAISING PANEL 80 lt. WITH IRON BOTTOM (Extra EU)

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0990749

MODELLO  
D94/10KBE

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. It guarantees high performance, exceptional firing uniformity. Water feed directly into the tank via standard solenoid valve, controlled by a button on the front of the equipment. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

IRON baking tray (available for non-EU markets) with 2 mm thickness.

Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. Heating via armoured incoloy heating elements.

Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss.

Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# ELECTRIC MANUAL BRAISING PANEL 80 lt. WITH IRON BOTTOM (Extra EU)

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990749

MODELLO  
D94/10KBE

SERIE  
DIAMANTE90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990749
DEFINITION	D94/10 KBE BRAZIER EL.M80 FE
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	114,800 Kg
VOLUME (net)	0,626
PACKAGE LENGTH	860,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	130,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 KBE

# ELECTRIC MANUAL BRAISING PANEL 80 lt. WITH IRON BOTTOM (Extra EU)

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....


CODICE  
CR0990749

MODELLO  
D94/10KBE

SERIE  
DIAMANTE90


## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

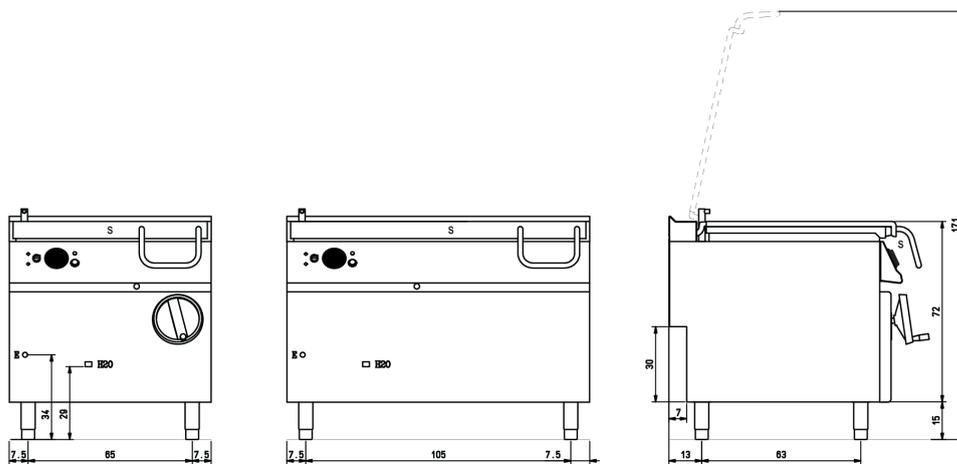

(D) 94/10 KBE ...

(D) 96/10 KBE ...

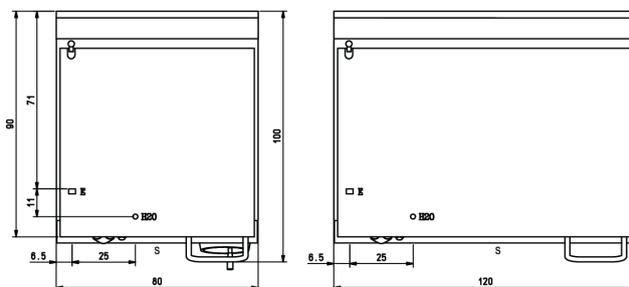

### Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet  
 Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Scarico vasca - Wannenabflussrohr - Pan outlet  
 Vidange du bac - Descarga cuba - Water toevoer

# ELECTRIC MANUAL BRAISING PANEL 80 lt. WITH IRON BOTTOM (Extra EU)

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990749

MODELLO  
D94/10KBE

SERIE  
DIAMANTE90

## Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Self-balancing lids.



Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



# ELECTRIC MANUAL BRAISING PANEL 80 lt. WITH IRON BOTTOM (Extra EU)

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0990749

MODELLO  
D94/10KBE

SERIE  
DIAMANTE90

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment