

APPLICATION:		PRODUCT NAME:  ULTRA SPRAY VALVE PLUS		SPEC. CS
		MODEL:		SVB-l
QUANTITY:	ITEM NO.:	□ 2949 W/ 1.15 GPM NOZZLE □ 13641 W/ .70 GPM NOZZLE	JLLS-	
		OPTIONS OR MODIFICATIONS:		×

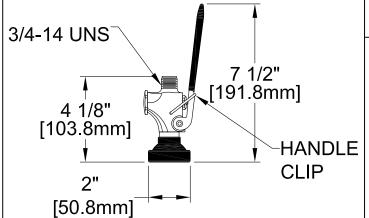



□ OTHER

### **FEATURES**

# **ULTRA SPRAY VALVE PLUS**

- LOWEST ENERGY USER 1.15 GPM @ 60 PSI
- **CLEANS FASTER TEST PROVEN**
- ENGINEERED TO LAST NO 'O' RINGS TO LEAK
- INTERCHANGEABLE FITS ALL BRANDS

## **ULTRA SPRAY VALVE PLUS 7**

- LOWEST ENERGY USER .70 GPM @ 60 PSI
- **CLEANS FASTER TEST PROVEN**
- ENGINEERED TO LAST NO 'O' RINGS TO LEAK INTERCHANGEABLE - FITS ALL BRANDS

# SYSTEM LIMITS

- TEMP: 40°F MIN. TO 160°F MAX.
- PRESSURE: 200 PSI MAX, STATIC

#### SHIPPING WEIGHT

1.5 LBS

## PRODUCT COMPLIANCE:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Class II & Class I



TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com