BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____

P SERIES TOP MOUNT FREEZERS

# P SERIES TOP MOUNT FREEZERS

## Model: PFD2HC-1AS

### SOLID DOOR / PASS-THRU



## 7 YEAR WARRANTY

### Parts, Labor, and Compressor

## CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom & back)
- Interior is made of corrosion resistant aluminum
- Stainless steel door liner
- 22 Gauge stainless steel door
- Full electronic control
- Expansion valve technology
- Variable speed compressor technology
- Self-closing doors with 120˚ stay-open feature
- LED interior light
- Cylinder locks
- Snap-in magnetic gaskets for positive door seal
- Hinged front shroud
- Energy saving thermal breaker
- Stainless steel breaker caps
- Six (6) heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- 8' Cord and plug (see electrical data for details)

## OPTIONS & ACCESSORIES

- Stainless steel case back
- Stainless steel interior
- Additional shelves
- 3" or 6" Casters
- 6" Seismic legs
- Tray slides (type A & A/C)
- Door swing orientation (at time of order)
- Remote option* (see note back on page)

## REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F

3779 Champion Blvd., Winston-Salem, NC 27105
888-845-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com

Please verify qualifying units by visiting:
www.energystar.gov/cfs


Specifications are subject to change without prior notice.

Date Issued 11/26 Printed in U.S.A.


# BEVERAGE-AIR

## P Series Freezers
## Model: PFD2HC-1AS


PLAN VIEW

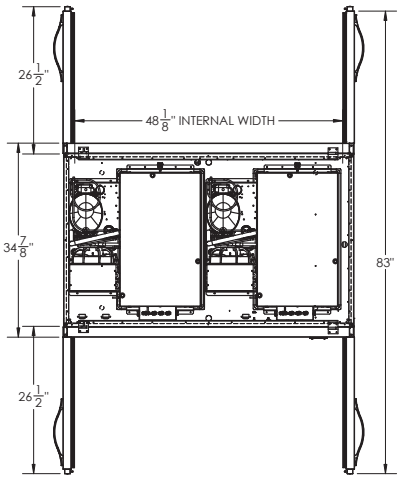


ELEVATION VIEW

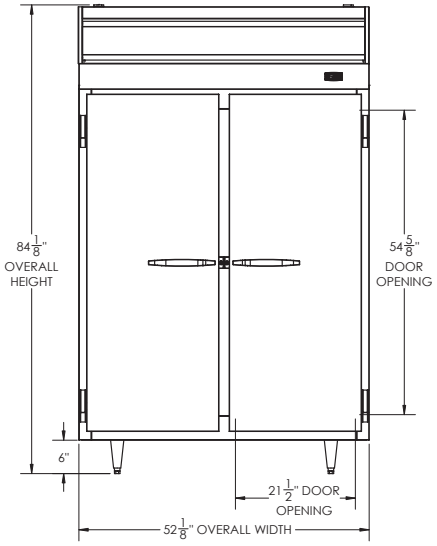


SIDE VIEW

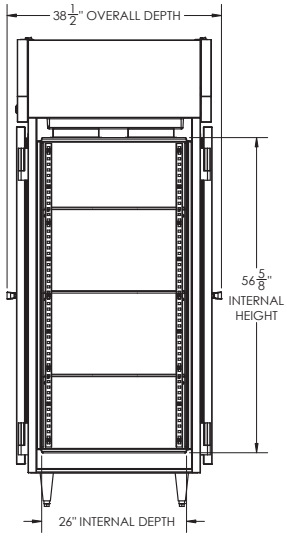


| EXTERNAL DIMENSIONAL DATA | |
|---|---|
| Width Overall (in) | 52 1/8” |
| Depth Overall (in) | 38 1/2” |
| Height Overall (in) | 84 1/8” |
| Number of Doors | 4 |
| Depth with Door Open 90 ° | 83” |
| Door Openings (in) | 21 1/2” x 54 5/8” |
| **INTERNAL DIMENSIONAL DATA** | |
| NET Capacity (cubic ft). | 48.33 |
| Internal Width Overall (in) | 48 1/8” |
| Internal Depth Overall (in) | 26” |
| Internal Height Overall (in) | 56 5/8” |
| Number of Shelves | 6 |

*NOTE: Remote units are field wired and come with 6” legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4”. Metric dimensions (MM).

Required Clearance: 12” Top

| ELECTRICAL DATA | |
|---|---|
| Full Load Amps | 13.9 |
| Voltage | 115/60/1 |
| Nema Plug (8’ cord) | 5-20P |
| **REFRIGERATION DATA** | |
| Horsepower | (2) 3/4 |
| Capacity (BTU/Hr) | 4900 |
| Heat Rejection (BTU/Hr) | 7350 |
| Charge (lbs/grams/ounces) | 0.2866 / 130 / 4.6 |
| **SHIPPING DATA** | |
| Gross Weight - Crated | 642 lbs. |
| Height - Crated (in) | 87” |
| Width - Crated (in) | 60” |
| Depth - Crated (in) | 45” |

### ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at factory and include 8’ long cord and plug set.

NOTE: Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.


3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com



Date Issued 11/26 | Printed in U.S.A.



WELBILT
an Ali Group Company