



REFRIGERATED

Drop-In Cold Food Wells w/ 3" Pan Rails

Model

E-CP3-1
E-CP3-2
E-CP3-3
E-CP3-4
E-CP3-5
E-CP3-6



STANDARD FEATURES

- Self contained drop-in design
- Features 3" deep pan rails
- Hold standard 12" by 20" food pans and fractional sized pans
- Meets NSF Standard 7
- Stainless steel top and liner for maximum strength and durability
- 1" drains for ease of cleaning
- On-off switch with 8 ft. cord & plug for ease of installation and operation
- Type 134A or 404A CFC free refrigerant
- Fully insulated, CFC free, foamed-in place insulation keeps food cold while saving energy

DESCRIPTION

In Cold Pans hold pre-chilled food products at cold, fresh and safe serving temperatures All models are completely self-contained in one to six-pan models with individual thermostatic controls, are CFC free and include an 8 ft. 120V cord and plug.

SPECIFICATIONS

Exterior – One-piece top flange and coved-corner interiors constructed of 18 gauge stainless steel. Exterior body constructed of heavy gauge, corrosion resistant steel. Condensing unit mounted on corrosion resistant frame below the cold pan.


Interior – CFC free foamed-in-place insulation through-out, 1" drain located in the center for easy cleaning, and recessed ledge for pan support.

Refrigeration – Type 134A or 404A CFC free refrigerant system featuring wrapped coil construction on both sides and bottom, individual thermostats, on/off switch, 8 ft. cord and plug set NEMA 5-15P. Refrigeration system features sight glass, easy service valves, dryer/filter and receiver.

Drop-In Cold Food Wells w/ 3" Pan Rails

□ E-CP3-1 □ E-CP3-2 □ E-CP3-3 □ E-CP3-4 □ E-CP3-5 □ E-CP3-6

Model E-CP3-4
shown below

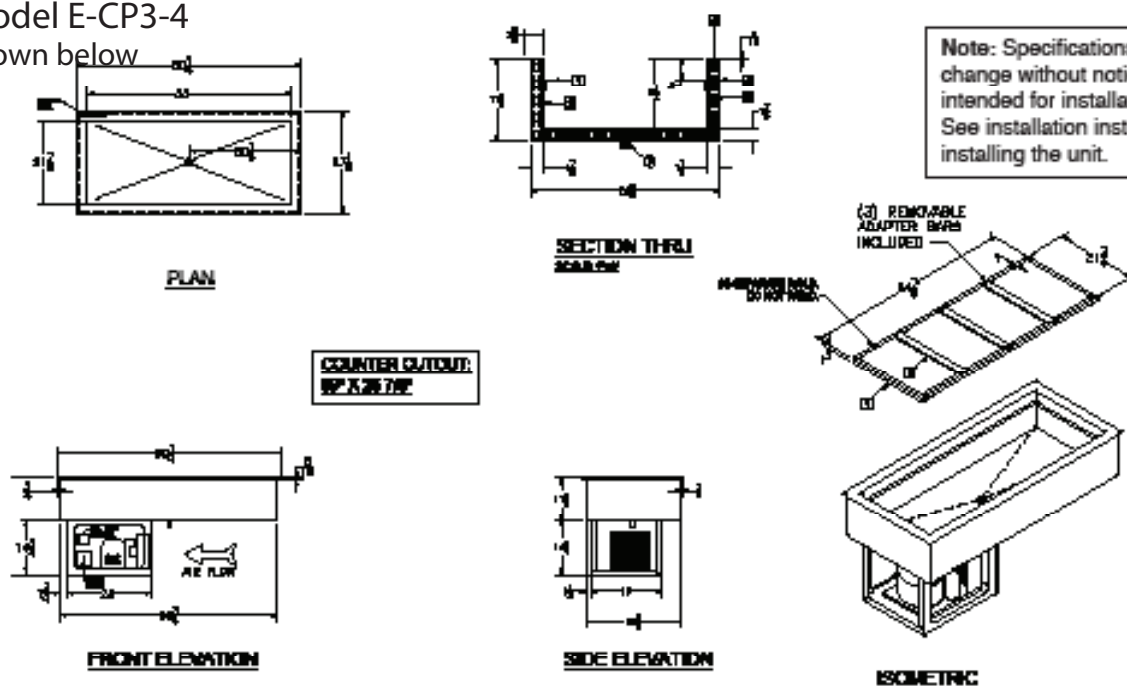

SPECIFICATIONS

Model Number	OVERALL DIMENSIONS		INTERIOR DIMENSIONS		CUT OUT DIMENSIONS		
	A Front to Back Inches (MM)	B Left to Right Inches (MM)	C Height Inches (MM)	D Front to Back Inches (MM)	E Left to Right Inches (MM)	F Front to Back Inches (MM)	G Left to Right Inches (MM)
E-CP3-1	27-1/8 (689)	19-1/8 (486)	26-1/8 (664)	21-7/8 (556)	13-7/8 (352)	25-7/8 (657)	17-7/8 (454)
E-CP3-2	27-1/8 (689)	32-3/4 (832)	26-1/8 (664)	21-7/8 (556)	27-1/2 (699)	25-7/8 (657)	31-1/2 (800)
E-CP3-3	27-1/8 (689)	46-1/2 (1181)	26-1/8 (664)	21-7/8 (556)	41-1/4 (1048)	25-7/8 (657)	45-1/4 (1149)
E-CP3-4	27-1/8 (689)	60-1/4 (1530)	26-1/8 (664)	21-7/8 (556)	55 (1397)	25-7/8 (657)	59 (1496)
E-CP3-5	27-1/8 (689)	74 (1880)	26-1/8 (664)	21-7/8 (556)	68-3/4 (1746)	25-7/8 (657)	72-3/4 (1847)
E-CP3-6	27-1/8 (689)	81-3/4 (2229)	26-1/8 (664)	21-7/8 (556)	82-1/2 (2096)	25-7/8 (657)	86-1/2 (2197)

SHIPPING INFORMATION

Model Number	WEIGHTS		CARTON DIMENSIONS			CRATE SIZE	
	SHIPPING WEIGHTS POUNDS (KG)	SHIPPING WEIGHTS POUNDS (KG)	WIDTH INCHES (MM)	DEPTH INCHES (MM)	HEIGHT INCHES (MM)	CUBIC FEET	CUBIC METERS
E-CP3-1	115 (52)	105 (48)	21 (533)	29 (737)	32 (813)	11.3	0.31
E-CP3-2	140 (64)	124 (56)	29 (737)	34 (864)	32 (813)	18.3	0.52
E-CP3-3	175 (79)	156 (71)	29 (737)	48 (1219)	32 (813)	25.8	0.73
E-CP3-4	210 (245)	175 (79)	29 (737)	62 (1575)	32 (813)	33.3	0.94
E-CP3-5	245 (111)	194 (88)	29 (737)	76 (1930)	32 (813)	41.0	1.16
E-CP3-6	285 (129)	213 (97)	29 (737)	89 (2261)	32 (813)	47.8	1.35

POWER SUPPLY

Model Number	VOLTS	HP	AMPS	PHASE	POWER SUPPLY	REFRIGERANT
E-CP3-1	115	1/4	4.9	SINGLE	NEMA 5-15P	134A
E-CP3-2	115	1/4	4.9	SINGLE	NEMA 5-15P	134A
E-CP3-3	115	1/3	5.5	SINGLE	NEMA 5-15P	404A
E-CP3-4	115	1/2	6.4	SINGLE	NEMA 5-15P	404A
E-CP3-5	115	3/4	15.2	SINGLE	NEMA 5-20P	404A
E-CP3-6	115	3/4	15.2	SINGLE	NEMA 5-20P	404A