



BEVERAGE-AIR®

PROJECT: _____
 ITEM # _____ QTY: _____
 MODEL # _____
 AIA # _____ SIS # _____
 APPROVED: _____

MARKETMAX DUAL TEMPS

Model: MMRR49HC-1-A-WW

DUAL-TEMP GLASS DOOR MERCHANDISER REFRIGERATOR/REFRIGERATOR



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Exterior features durable white painted steel
- Heavy duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- Full electronic control with digital display
- Dual-temp refrigerator/refrigerator units provide two different operating temperature zones for different types of products
- Refrigerators have double pane lowE argon filled glass doors
- Self-contained bottom mount refrigeration system
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- Ten (10) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- Leveling feet standard



OPTIONS & ACCESSORIES

- Stainless steel or black exterior
- Stainless steel or black interior
- Left door hinged (at time of order)
- Shelves black or white
- Wine models available
- Shelf clips
- Flow track
- Gravity track
- Price tag molding
- Electronic lock models (swing doors only)
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door lock
- Custom signage & decals
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Non-electric defrost with hot gas condensate evaporation
- Epoxy coated evaporator coil
- Maintains product temperatures between 36° - 38°F




BEVERAGE-AIR®

MarketMax Dual Temps Model: MMRR49HC-1-A-WW


PLAN VIEW

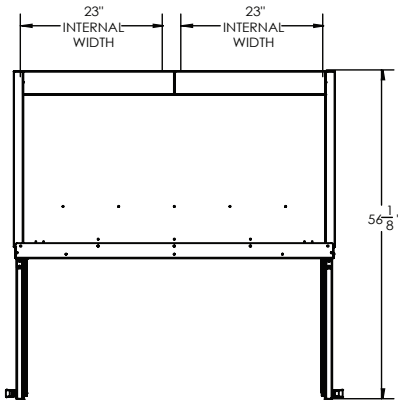

ELEVATION VIEW

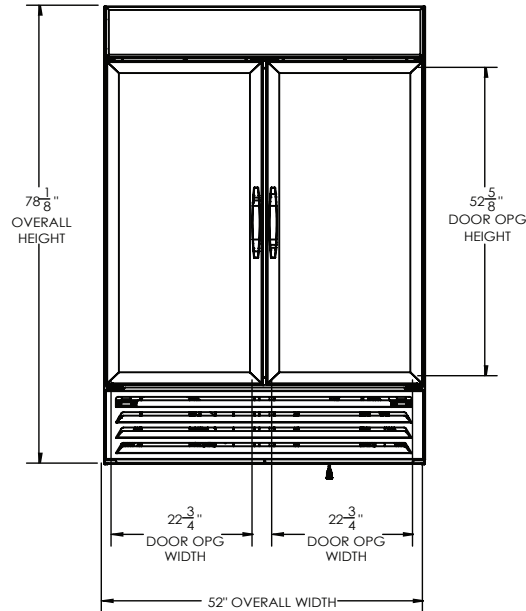

SIDE VIEW

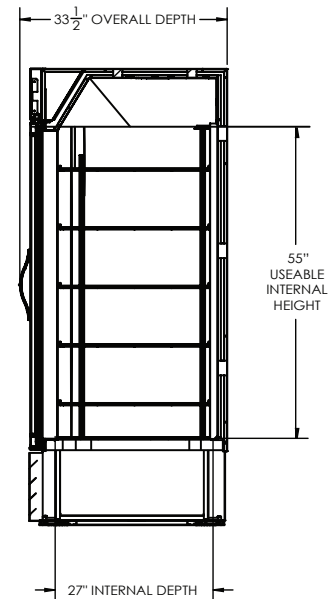

EXTERNAL DIMENSIONAL DATA

Width Overall (in)	52"
Depth Overall (in)	33 1/2"
Height Overall (in)	78 1/8"
Number of Doors	2
Depth with Door Open 90 °	56 1/8"
Door Openings (in)	22 3/4" x 52 5/8"

INTERNAL DIMENSIONAL DATA

NET Capacity (cubic ft.)	R 21.01 - R 21.01
Internal Width Overall (in)	(2) 23"
Internal Depth Overall (in)	27"
Internal Height Useable (in)	55"
Number of Shelves	10

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: Rear 3"

ELECTRICAL DATA

Full Load Amps	R 3.18 - R 3.18
Voltage	115/60/1
Nema Plug (8' cord)	(2) 5-15P

REFRIGERATION DATA

Horsepower	(R) 1/4 (R) 1/4
Capacity (BTU/Hr)	(R) 1702 (R) 1702
Heat Rejection (BTU/Hr)	4848
Charge (lbs/grams/ounces)	(R) 0.1984 / 90 / 3.17 (R) 0.1984 / 90 / 3.17

SHIPPING DATA

Gross Weight - Crated	708 lbs.
Height - Crated (in)	85"
Width - Crated (in)	54"
Depth - Crated (in)	36"

ELECTRICAL CONNECTION



115/601
(2) NEMA 5-15P

Unit pre-wired at factory
and include 8' long cord
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/26 | Printed in U.S.A.