

# C45D



**Buttress Group Ltd.**  
Top Station Road, Brackley,  
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	<b>525 x 555 x 715</b>
	Packaging dimensions (W x D x H)	mm	<b>580 x 640 x 870</b>
↙ ↘	Gross weight	Kg	<b>49</b>
	Net weight	Kg	<b>44</b>
	Cubic volume	m <sup>3</sup>	<b>0.37</b>
	Rack size	mm	<b>450 x 450</b>
☐	Door opening	mm	<b>300</b>
	Max useable height	mm	<b>280</b>
	Rack guide rails		<b>flat</b>
	Body construction		<b>stratified double skin</b>
	Tank construction		<b>welded - stamped base</b>
🔥	Tank volume	L	<b>14</b>
	Tank heating element	kW	<b>1.4</b>
	Surface scrap trays		<b>composite (2.5mm mesh)</b>
🔧	Wash arms		<b>parallel (quick release)</b>
	Wash pump type		<b>Dual flow</b>
	Wash pump power	kW	<b>0.2</b>
	Wash temperature	°C	<b>60 - 65 (adjustable)</b>
	Boiler type		<b>pressurised</b>
🔧	Boiler volume	L	<b>2.6</b>
	Breaktank		<b>no</b>
	Boiler heating element	kW	<b>2.6</b>
	Rinse booster pump		<b>no</b>
🔧	Rinse booster pump power	kW	<b>n/a</b>
	Rinse temperature	°C	<b>65 - 80 (adjustable)</b>
	Rinse arms		<b>parallel (quick release)</b>
🚰	Drain system		<b>partial drain</b>
	Drain filter		<b>triple filter</b>
	Drain pump		<b>yes</b>
💧	Rinse aid dispenser	peristaltic	<b>yes</b>
	Detergent dispenser	peristaltic	<b>yes</b>
	Water consumption per cycle	L	<b>1.5 - 2.0</b>
🍷	Inlet water pressure	bar	<b>2.0 - 4.0</b>
	Fast program (GLS1)	sec	<b>75</b>
	Total programs	programs	<b>6</b>
	Total power	kW	<b>2.8</b>
⚡	Electric connection	V-Ph-Hz	<b>230-240V 1N 50Hz</b>
	Alternative		<b>not convertible</b>
	Fuse	A	<b>13 (moulded plug)</b>
🔗	Water softener		<b>no</b>




### Supplied with

Flat rack	2
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

# C45D



**Buttress Group Ltd.**  
Top Station Road, Brackley,  
Northants NN13 7UG, UK

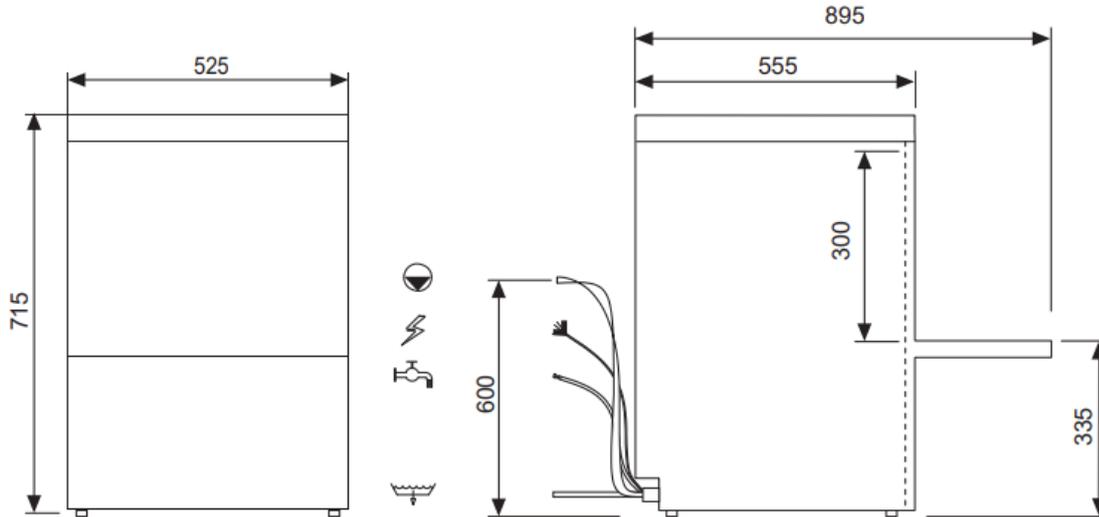

All services must be within 1 metre