

## Viking 200S Combi Jacketed Kettle

Model – Viking Combi 200S (4215969C)

### FEATURES

- Viking kettle with mixer
- Steam heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid
- Step-less temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




### TECHNICAL DATA

Net Volume	200L	Electrical	Power 1,8 kW
Spare Volume	19 L		Voltage 230V,
Gross Volume	219 L		1P+N+E 50/60Hz
Dimensions			AMP 16A
Width	1360mm	Total Heat	30kW
Height	1039mm	Load	Latent 1.4kW,
Depth	965mm		Sensible 6.1 kW
Connections		Waste	By kitchen
Water	Cold ø15mm	Net Weight	270 kg
	Hot ø10mm	Steam cons	60 kg/hr

NOTE - Mandatory installation kit required for all installations, options are:

- Single kettle surface – 4215839
- Single kettle subsurface – 4215840
- Group kettle surface – 4215843
- Group kettle subsurface - 4215844

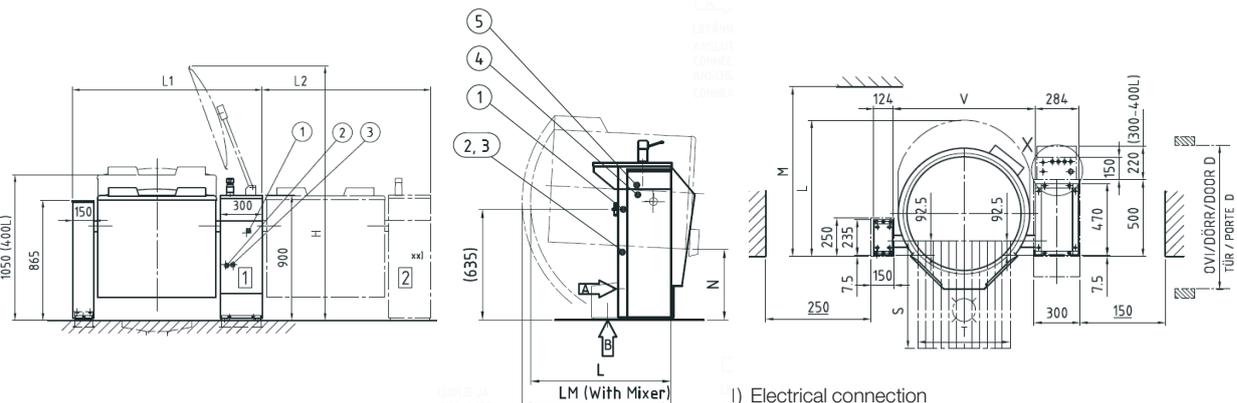

- 1) Electrical connection
- 2) Cold water connection
- 3) Hot water connection
- 4) Data cable (HACCP option)
- 5) Control cables to building for heating control of kettle
- 6) Steam inlet connection
- 7) Steam condensate outlet

Finland  
metos.com/manufacturing

Metos Oy Ab  
Ahjonkaarre  
FI 04220 Kerava  
Finland  
Telephone +358 204 3913  
international.sales@metos.com

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
200S	1360	1210	1130	895	980	1980	800	600	945	420	926

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.