



F170S

Open Shelf Equipment Stands

Project
Item
Quantity
CSI Section 11400
Approved
Date

Models

F170S36 Open shelf equipment stand 36" in length
F170S48 Open shelf equipment stand 48" in length
F170S60 Open shelf equipment stand 60" in length
F170S72 Open shelf equipment stand 72" in length
F170S84 Open shelf equipment stand 84" in length
F170S96 Open shelf equipment stand 96" in length



Standard Features

- Top is stainless steel, with integral front marine edge
- · Standard units have unfinished ends
- Stainless steel cutting board brackets with 1.25" thick x 9.50" deep maple cutting board
- 14-gauge leg rails that run the entire length of the unit
- · Stainless steel bottom shelf
- 6.12" adjustable full stainless steel legs and bullet feet
- One year parts and 90 day labor standard warranty

Options & Accessories

- Stainless steel back
- Stainless steel end
- Laminate back
- · Laminate end
 - Casters

Specifications

Top is constructed of stainless steel, with integral front marine edge nosing and rear backsplash. Spline bars are made of stainless steel and run front to back on both the left and right stainless steel sides for support and spline purposes. Two pieces of C-channel are welded and glued with construction adhesive to the under side of the top for strength and sound deadening. As a standard, cutting board brackets are attached to each side and house a 1.25" thick x 9.5" deep maple cutting board.


Base is constructed of stainless steel sides. One bottom shelf constructed of stainless steel with double hemmed nosing is spot welded between the sides and braced for extra support.

Unit is supported with two leg rails that run the entire length of the unit. Leg rails are welded to the bottom side of the unit and are tied together with two braces running front to back. Caster/leg boxes are welded inside the leg rail and $6.12^{\prime\prime\prime}$ adjustable legs are mounted as standard with (4) 5/16 $^{\prime\prime\prime}$ bolts.







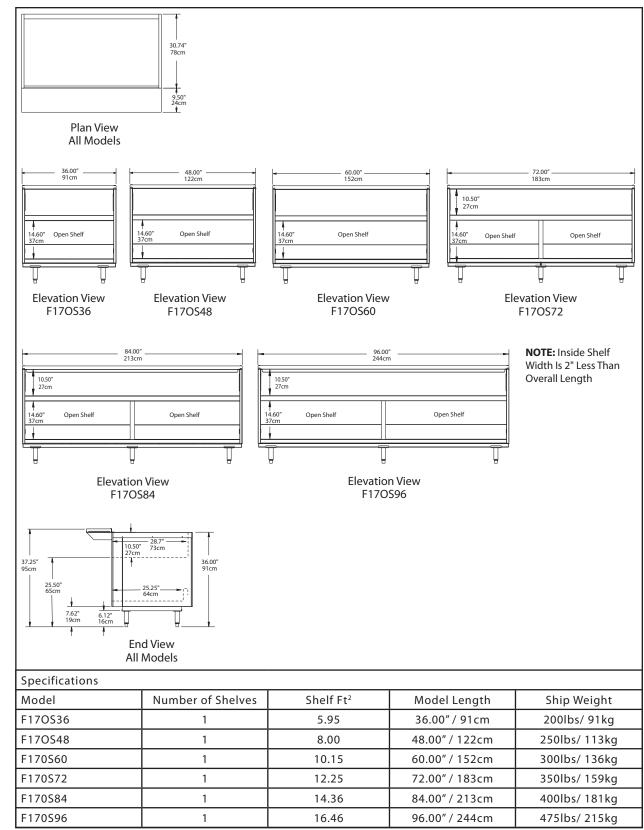

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com Printed in the U.S.A. DSF17OS 04/13

