

Drop-In Drop-in refrigerated quartz surface - 6GN

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



341087 (D21C6)

Drop-in refrigerated quartz
surface (6 GN container
capacity)

Short Form Specification

Item No. _____

Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations. Designed to serve the food on plates. Food introduced at the correct temperature maintains its core temperature according to Afnor Standards. Automatic defrosting guarantees evaporators clearance and efficient cooling. Digital control with temperature display with precise adjustment (0,1°C). Fully compliant HACCP digital controls include visible alarms. The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled. It comes with stylish white coloured quartz top and stainless steel frame that makes it ideal to serve cold dishes in an elegant way. Equipped with a drain hole to easily discharge top condensation. AISI 304 Stainless steel frame with rounded corners to facilitate cleaning operations. High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion. R290 refrigerant gas (GWP=3) to reduce environmental impact and increase cooling efficiency.

Main Features

- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- CB and CE certified by a third party notified body.
- Designed to be positioned in flush installation providing improved cleanability and suitable for modern design installations.
- Precise temperature control and setting at 0,1°C .
- As standard the product comes with digitally controlled thermostat which is in line of HACCP norms and provides visual alarm as a warning of the increasing or decreasing temperatures.
- Available drop-in dimensions: 1, 2, 3, 4, 5, 6 GN.
- Food introduced at the correct temperature maintains its core temperature according to Afnor Standards.
- Automatic defrosting guarantees evaporators clearance and efficient well cooling.
- Remote version is available.
- Designed to serve the food on plates .
- Equipped with a drain hole to easily discharge top condensation.
- It comes with stylish white coloured quartz top and stainless steel framed that makes it ideal to serve cold dishes in an elegant way.

Construction

- Electronic control with temperature display.
- High-density expanded polyurethane foam with cyclopentane guarantees excellent well insulation to reduce energy dispersion.
- IPx2 water protection.
- The bottom is equipped with copper tubes to ensure proper cooling, with this system the air touches the cold surface and gets cooled.
- AISI 304 Stainless steel frame with rounded corners to facilitate cleaning operations.
- White quartz surface (other quartz colors are available on request).


APPROVAL: _____




Electrolux
PROFESSIONAL

Drop-In Drop-in refrigerated quartz surface - 6GN

Side



Top

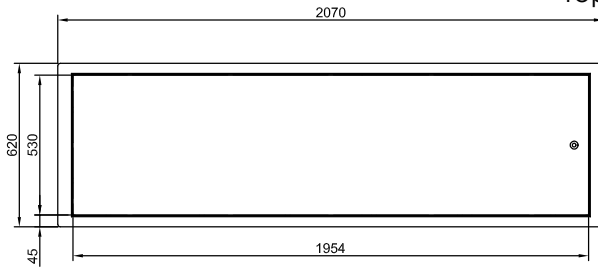

D = Drain
EI = Electrical inlet (power)

Electric

Supply voltage:

341087 (D21C6)

220-240 V/1N ph/50 Hz

Electrical power max.:

0.6 kW

Water:

Water drain outlet size:

1"

Drain line size:

1"

Key Information:

External dimensions, Width: 2070 mm

External dimensions, Height: 380 mm

External dimensions, Depth: 620 mm

Net weight: 63.7 kg

Shipping weight: 88.7 kg

Shipping height: 500 mm

Shipping width: 2110 mm

Shipping depth: 660 mm

Shipping volume: 0.7 m³

Set temperature: -15 / -5 °C

Noise level: 59 dBA

Top temperature: -15 / -5 °C

Refrigeration Data

Refrigerant type:



R290





Drop-In
Drop-in refrigerated quartz surface - 6GN

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2020.11.12

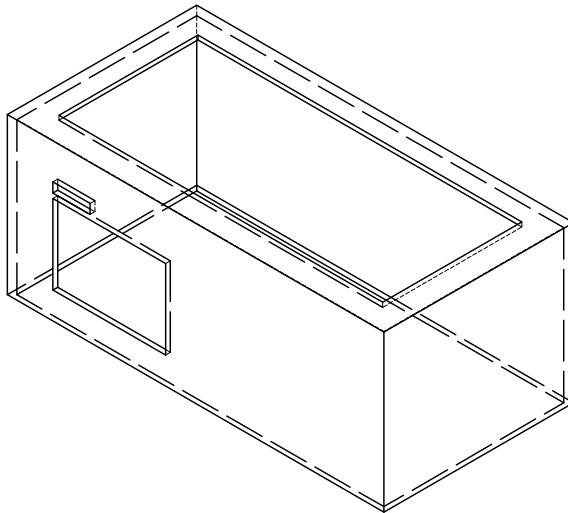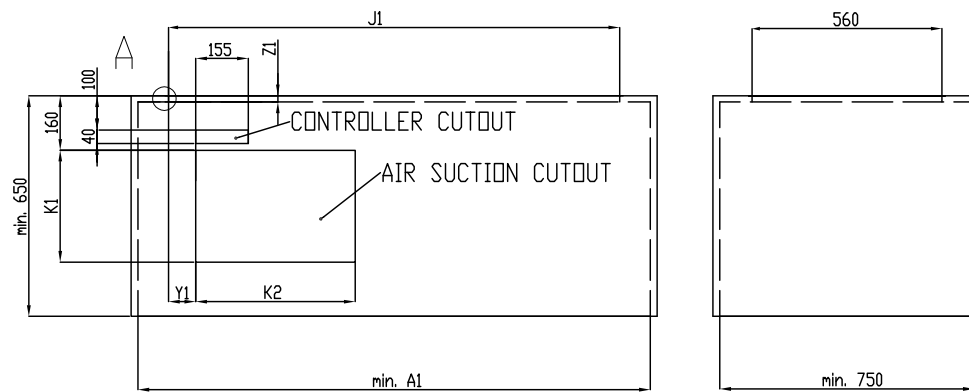

	J1	A1	K1	K2	Y1	Z1
1 GN	355	535	330	380	80	20
2 GN	680	855		470		
3 GN	1010	1190				
4 GN	1330	1510				
5 GN	1660	1835				
6 GN	1985	2165				

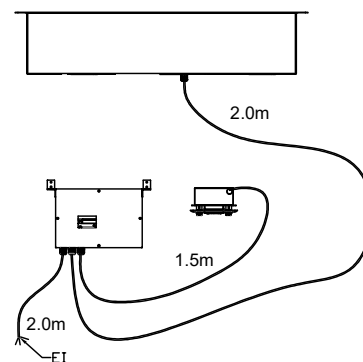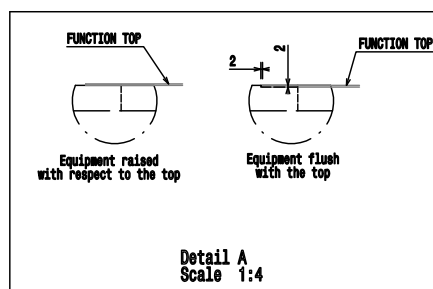

5. IDS COLD SURFACE