


**212** Kg/24h (maximum\*)

Modular Ice Maker  
SLIM M195 17g - Air Cooled

- USB
- BLUETOOTH
- WI-FI
- TOUCH CONTROL
- RAINBOW TECHNOLOGY
- SAFE ICE
- PROGRAMMED OZONE CYCLE
- SCHEDULED PRODUCTION

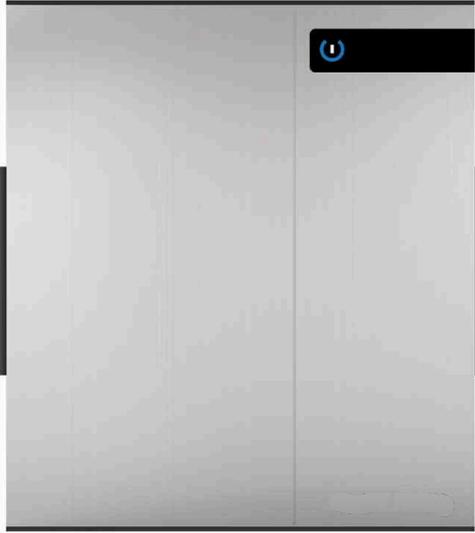

### ICE TYPE

	PCS / CYCLE	ICE weight
DICE 22X22X24 mm	168	10 g
LARGE 29X29X24 mm	110	17 g

### ICE PRODUCTION

Kg/24h  
lbs/24h

#### Air Cooled Unit

Air Temp.	Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
<b>10°</b>	<b>186</b>	<b>205</b>	<b>209</b>	<b>212</b>
50°	410	452	460	466
<b>21°</b>	<b>166</b>	<b>185</b>	<b>189</b>	<b>192</b>
70°	367	408	417	423
<b>32°</b>	<b>132</b>	<b>150</b>	<b>154</b>	<b>157</b>
90°	290	332	340	346
<b>38°</b>	<b>120</b>	<b>138</b>	<b>142</b>	<b>145</b>
100°	265	304	384	320

#### Water Cooled Unit

Air Temp.	Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
<b>10°</b>	<b>173</b>	<b>193</b>	<b>202</b>	<b>205</b>
50°	381	425	445	452
<b>21°</b>	<b>157</b>	<b>176</b>	<b>184</b>	<b>187</b>
70°	346	388	406	419
<b>32°</b>	<b>155</b>	<b>173</b>	<b>181</b>	<b>187</b>
90°	342	381	399	412
<b>38°</b>	<b>145</b>	<b>164</b>	<b>174</b>	<b>181</b>
100°	320	362	384	399

### FEATURES

- 2 year warranty
  - 3 years on evaporator & compressor
- Rainbow technology
  - Patented evaporator treatment
- Stainless steel construction
- Air or water cooled
- Sanitisation cycle
- Touch sensitive button
- Acoustic and luminous alarms
- Report HACCP alarms
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Supplied with 13 amp moulded plug
- My Ice APP
  - Programmable ice production
  - Machine performance

### OPTIONS

- Ozone sanitisation
  - Prevents biofilm & microbial growth
- Machine variants
  - SLIM M195W 17g water cooled
  - SLIM M195 10g air cooled
  - SLIM M195W 10g water cooled

### SPECIFICATIONS

### SLOPE BIN

MSB105 - MSB155 - MB255

### DIMENSIONS

WxDxH (mm)  
560x620x660

630x690x810

### VOLTAGE

220-240/50/1

### REFRIGERANT

R290  
GWP=3  
Ton CO2 equivalent:  
Air= 0  
Water= 0

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	kg
SLIM M195 A	220-240/50/1		1661	950	13	12.4	11.9	68	80
SLIM M195 W	220-240/50/1		1661	810	13	9.4	9.5	68	80


\*189 Kg/24hr average production @ 21°C ambient air temp. & 15°C incoming water water temp.

Tel. 0345 130 8070  
sales@maidaid-halcyon.co.uk  
www.maidaid.co.uk

212 Kg/24h


Modular Ice Makers:  
SLIM M195 10g - SLIM M195 17g - SLIM M195W 10g - SLIM M195W 17g

### DIMENSIONS

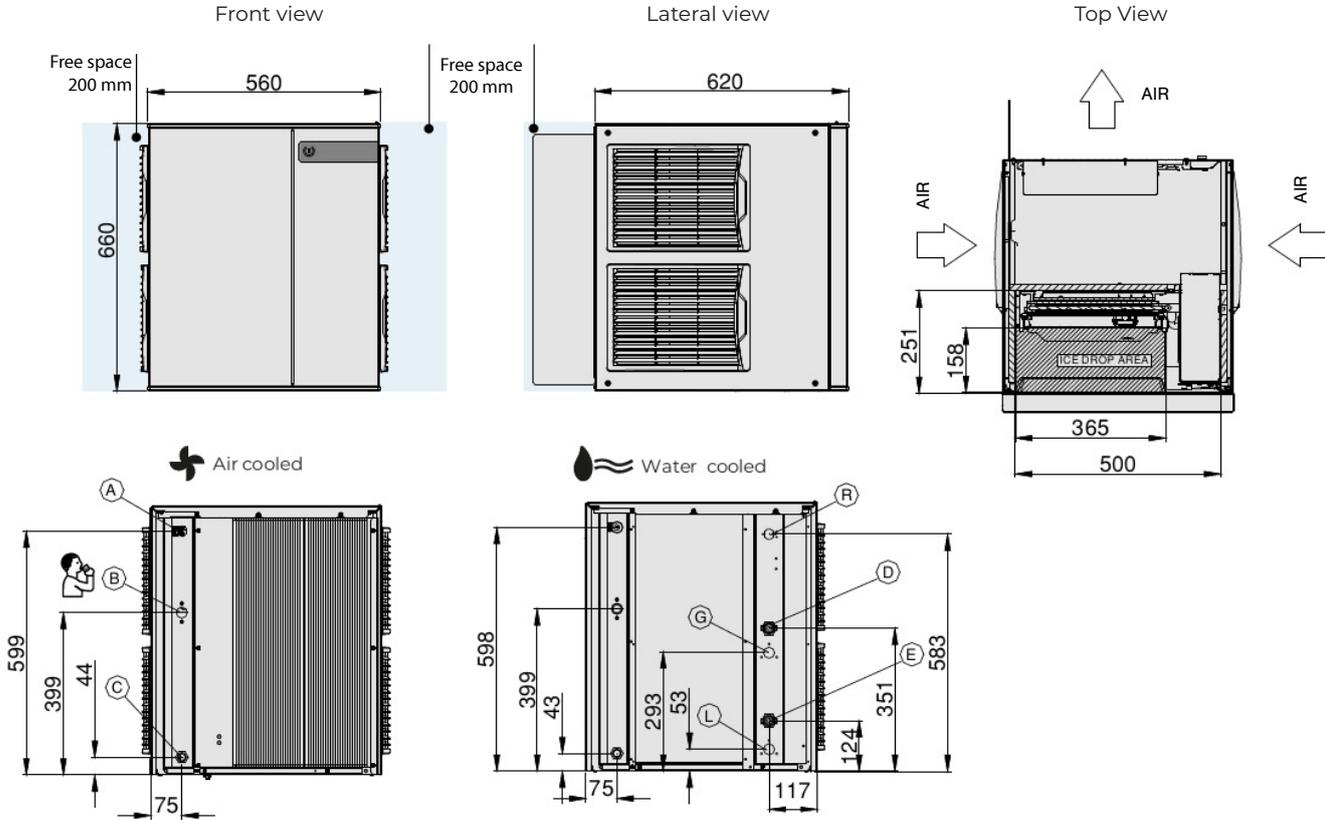

- (A) Electrical supply cable
- (B) Potable water inlet 3/4
- (C) Water drain Ø 20mm
- (D) Condenser water inlet 3/4 GAS
- (E) Condenser water outlet 3/4 GAS
- (G) Discharge gas split line 1/2" male quick connection
- (L) Suction gas split line 1/2" male quick connection
- (R) Remote electrical connection for condenser fans


### TOUCH CONTROL



Touch Sensitive Stand-by / Start button (LED with a seamless colour transition from white to red)

### APP MyICE

Control and monitor your ice machines directly from a smartphone

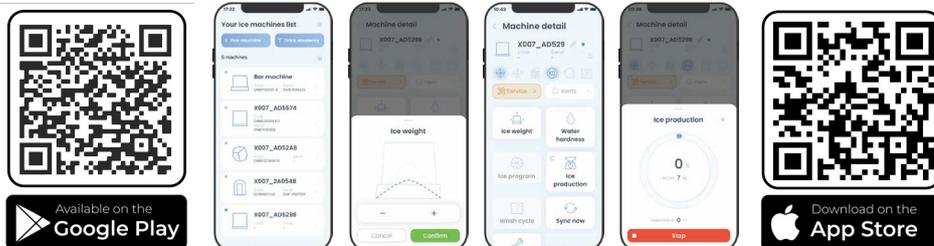

### Operating requirements

	Min.	Max
Air Temperature	10°C	40°C
Water Temperature	5°C	35°C
Water Pressure	1 Bar (14psi)	5 Bar (70psi)
Water conductivity	20 µS	500 µS
Electrical supply	-10%	+10%

Rejected Heat	2560W
Air Volume	590 m <sup>3</sup> /h

Tel. 0345 130 8070  
sales@maidaid-halcyon.co.uk  
www.maidaid.co.uk