

Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

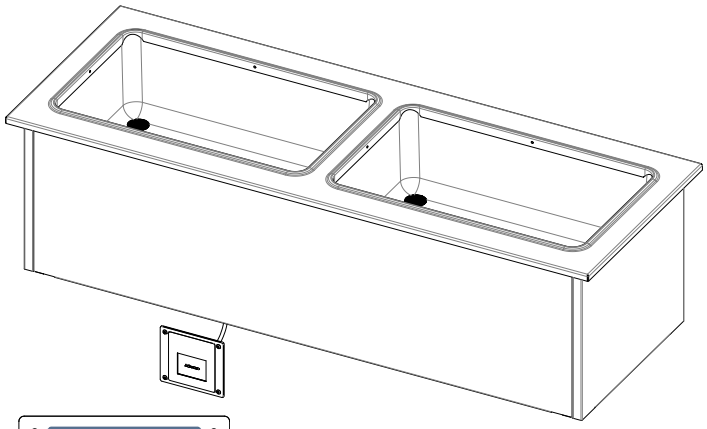



SHW2-SL

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins- Slimline
Hot Food - Electric - Sealed Well

- ❑ **SHW1-SL** 24 ¼"L x 17 ¼"W x 12 ¾"H
- ❑ **SHW2-SL** 46 ¼"L x 17 ¼"W x 12 ¾"H
- ❑ **SHW3-SL** 68 ¼"L x 17 ¼"W x 12 ¾"H

TOP RIM:

- ■ Heavy gauge, 300 Series stainless steel
- ■ Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- ■ Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- ■ 6-1/2" deep stainless steel liner, wet or dry operation
- ■ Fully Insulated
- ■ Sealed Element in each compartment
- ❑ 750 Watt
- ❑ 900 Watt
- ❑ 1200 Watt
- ■ Individual open drains

CONTROL PANEL:

- ■ Standard intuitive, easy to use touch screen control.
- ■ Easily adjusted presets LOW/MED/HIGH.
- ■ Built in WIFI and Bluetooth for future connectivity

EXTERIOR HOUSING

- ■ Heavy gauge paint grip steel

OPTIONS:

- ❑ Basic Control with infinite switches in control boxes w/stainless steel face plate, contact factory for details.
- ❑ Hug Edge Top
- ❑ 3 phase Wiring (except SHW1-SL)
- ❑ Individual valves
- ❑ Mainifold drains
- ❑ Master valve
- ❑ Designer Foodshields
- ❑ Adapter Plates
- ❑ Adapter Bars

AGENCY LISTING:

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change


WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning


DROP-IN - SLIMLINE - HOT FOOD - ELECTRIC - SEALED WELLS


Catalog No. ASHW-SLIMELECHFSL

A.I.A. File No. 35-C-13

DROP-INS - SLIMLINE HOT FOOD ELECTRIC - SEALED WELL

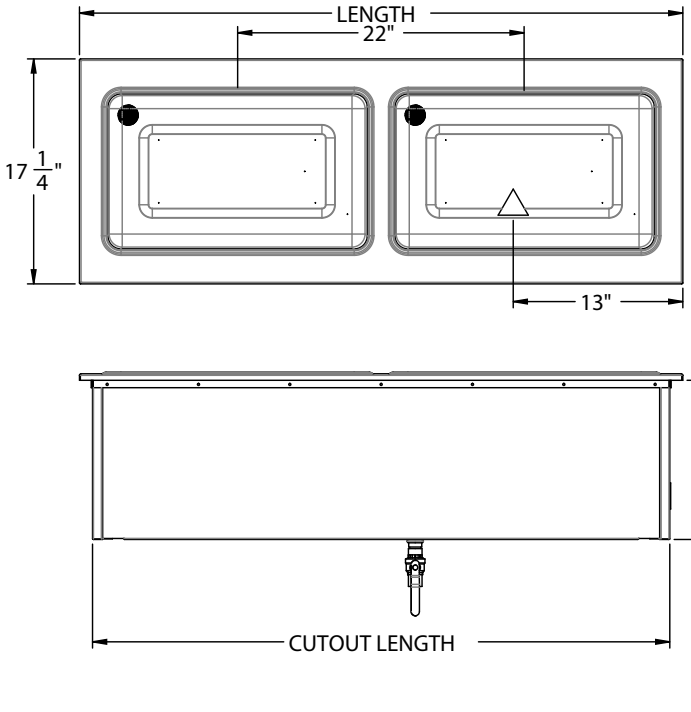

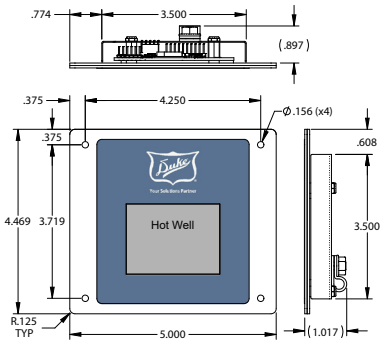



LEGEND
▲ - ELECTRICAL CONNECTION
● - DRAIN CONNECTION
Allow 4" gap between controls and unit

DIMENSIONS:

FREIGHT CLASS: 100

Model	Length		Width		Height		Cutout Length		Cutout Width		Cube ft. crated	Weight	
	in.	cm	in	cm	in	cm	in	cm	in	cm		lbs	kg
SHW1-SL	24 ¼	61.6	17 ¼	43.8	12 ¾	32.4	23	58.4	16	40.6	7.7	80	36.4
SHW2-SL	46 ¼	117.5	17 ¼	43.8	12 ¾	32.4	45	114.3	16	40.6	13.3	135	61.4
SHW3-SL	68 ¼	173.1	17 ¼	43.8	12 ¾	32.4	67	170.2	16	40.6	19.0	185	84.1

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Model	120V 750W			208V 750W			208V 900W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
SHW1-SL	834	7.0	5-15	834	4.0	6-20	1884	4.7	6-20	834	3.5	6-20
SHW2-SL	1584	13.2	L5-30	1584	7.6	6-20	2788	9.1	6-20	1584	6.6	6-20
SHW3-SL	2338	19.5	L5-30	2338	11.2	6-20	3688	13.4	L6-20	2338	9.7	6-20

Model	120V 1200W			208V 1200W				240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA		Watt	Amps	NEMA
SHW1-SL	1284	10.7	5-15	1284	6.2	6-20		1284	5.4	6-20
SHW2-SL	2484	20.7	L5-30	2484	11.9	6-20		2484	10.4	6-20
SHW3-SL	3688	30.7	5-50	3688	17.7	L6-30		3688	15.4	6-20

Duke
Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2025, Duke Manufacturing Co.