



Available in Dark Grey or White finish

MODELS

KGL-OU-(36)

KGL-OU-(48)

COMBINATION TYPE CASE

CASE HOLDS 36°F TO 40°F • UPPER SECTION CAN BE OPERATED AS REFRIGERATED OR DRY
MULTIPLE USES • FORCED AIR REFRIGERATION • OPEN FRONT LOWER SECTION
FRONT LOADING LOWER SECTION • TEMPERED GLASS,
REAR SLIDING DOORS IN UPPER SECTION



AUTODESK®
REVIT®


SELF CONTAINED	Model	Width (inches)	Capacity Cu.ft	Electrical			NEMA Plug	Weight lbs		Crate Size (inches)		
				Compressor		Total Amps		Net Weight	Ship Weight	L"	W"	H"
				H.P	Amps							
	KGL-OU-36-S	35.86	7.73	1/2	8.9	16.42	5-20P	485	617	42"	43"	71"
	KGL-OU-48-S	48.03	11	3/4	16	24	Hard-wired	564	708	53	40	71

STANDARD FEATURES

CFC free injected foam insulation
 Silver colored PVC coated steel front panel
 PVC coated steel gray interior
 Wood laminate covered end panels
 LED lighting in canopy and under all shelves
 Height adjustable shelves can be tilted
 Temperature and defrost regulated by a digital controller
 Removable condensate evaporating pan for easy cleaning
 Slide out condensing unit on self-contained units

OPTIONAL FEATURES

Stainless steel front panel
 Stainless steel base and / or interior
 Mirror rear sided doors (upper section)
 Mirrored side glass
 Front panel bumper protector
 PVC coated gray steel folding rear shelf
 Stainless steel folding rear shelf
 Acrylic product partitions
 Shelf price tag moldings
 Casters add 4-3/8" to height
 Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

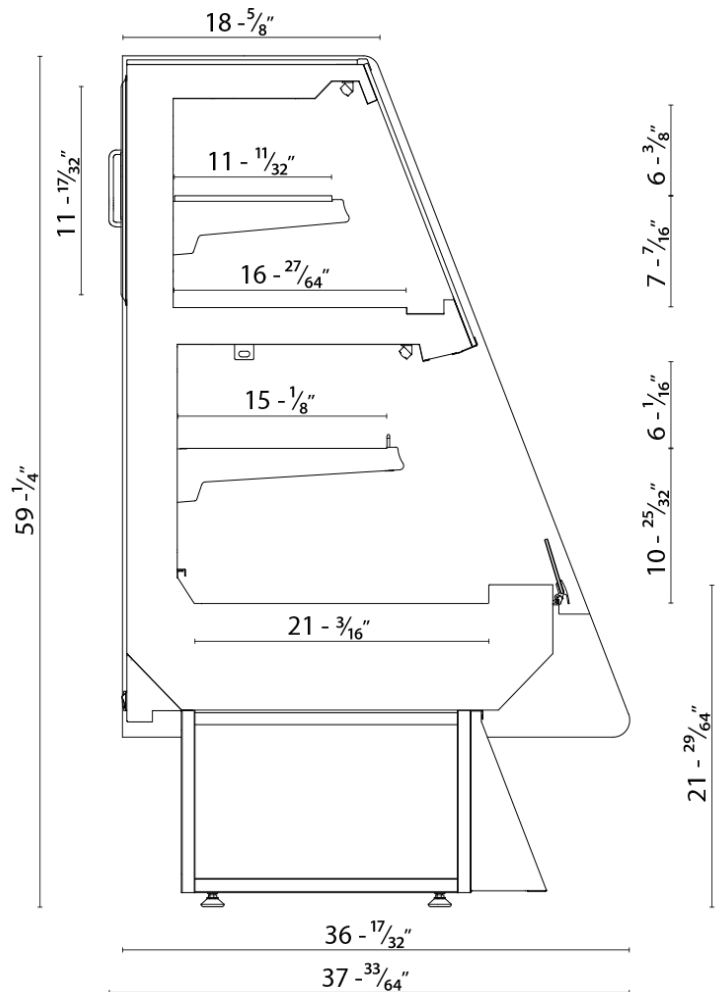

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient).

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Castors



Tel: 786.600.4687 / Toll Free: 844.218.8477

Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / toll free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com