



G3122 GAS BOILING TOP



G3122 Boiling Top

KEY FEATURES

- Energy efficient, high performance 5.3kW burners
 - *quick heat up, reduced waiting time*
- Semi-sealed, pressed stainless steel hob
 - *easy to remove and keep clean*
- Cast iron pan support
 - *long-lasting and robust*
- Mounted upon legs
 - *can be installed upon any suitable surface*
- Optional stands available
 - *fixed or mobile*
- Laser-etched control icons
 - *permanent, indelible markings*

MODELS and ACCESSORIES

G3122 Two burner boiling top

- Fully integrated extended flue
- Splashplate and plateshelf (*not for use with extended flue*)
- Fixed stand
- Mobile stand
- Lift-off fryplate
- Fixed installation kit
- Suiting kit

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. A clearance of 150mm should be observed between appliance and any combustible wall. Please consult the appliance installation manual for further details.






DOMINATOR^{PLUS}

G3122 GAS BOILING TOP

MODEL DIMENSIONS (in mm)

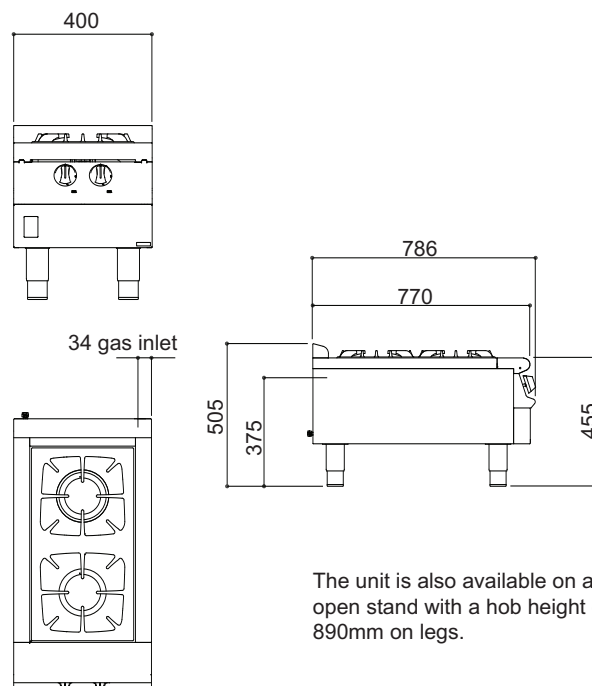

SPECIFICATION DETAILS

	G3122
Total rating (<i>natural and propane - kW - Nett</i>)	10.6
Total rating (<i>natural and propane - btu/hr - gross</i>)	39,800
Inlet size (<i>natural and propane</i>)	3/4" BSP
Flow rate - Natural gas (<i>m³/hr</i>)	0.82
Flow rate - Propane gas (<i>kg/hr</i>)	1.11
Inlet pressure (<i>natural and propane - mbar</i>)	20 / 37
Operating pressure (<i>natural and propane - mbar</i>)	15 / 37
Hob burner rating (<i>natural and propane - kW</i>)	5.3 x 2
Hob burner rating (<i>natural and propane - btu/hr</i>)	19,900 x 2
Weight (<i>kg</i>)	28.5
Packed weight (<i>kg</i>)	32