

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES TOP MOUNT REFRIGERATOR

PR3HC-1BHG Half-Glass Door Reach-In Hydrocarbon Series

MODEL: PR3HC-1BHG

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom
- Interior is made of corrosion resistant aluminum
- Full electronic control
- Expansion valve technology
- · Variable speed compressor technology
- · Self-closing doors with 120° stay-open feature
- · Glass half doors
- LED interior light
- Cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- · Low profile horizontal door handles
- · Hinged front shroud
- · Energy saving thermal breaker
- · Stainless steel breaker caps
- · Heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- · 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- · Stainless steel case back
- · Additional shelves
- 3" or 6" casters
- 6" Seismic legs
- Tray slides (type A & A/C)
- Door swing orientation (at time of order)
- Remote option (see note back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Refrigerator capable of maintaining product temperature 36°F to 38°F




















MODEL	PR3HC-1BHG	
EXTERNAL DIMENSIONAL DATA		
Width Overall	77 ³ ⁄ ₄ "	
Depth Overall with Handle	34 ¾"	
Height Overall	84 ½"	
Number of Doors	6	
Depth with Door Open 90°	57 ³ ⁄ ₄ "	
Door Opening (in)	21 ½" x 25 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	68.34	
Internal Width Overall (in)	73 ¾"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 %"	
No. of Shelves	9	
ELECTRICAL DATA		
Full Load Amperes* 115/60/1	8.5	
REFRIGERATION DATA		
Horsepower*	3/4	
Capacity (BTU/Hr)*	Variable Speed Technology	
SHIPPING DATA		
Gross Weight (crated lbs)	841 lbs	
Height - Crated	88"	
Width - Crated	87"	
Depth - Crated	45"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Top Mount Refrigerator

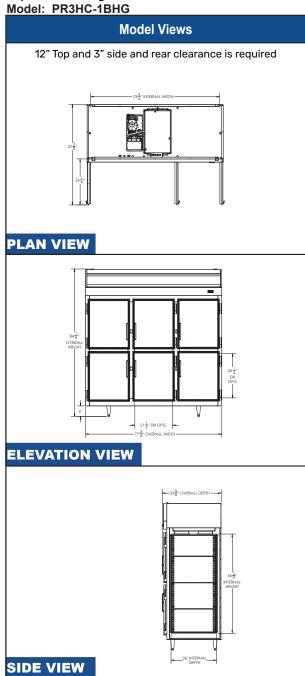

















Units pre-wired at factory and include 8' long cord



