Viking 300S Combi Jacketed Kettle

Model – Viking Combi 300S (4215970C)

FEATURES

- Viking kettle with mixer
- Steam heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid
- Step-less temperature control
- Multi-function mixing tool
- 2 mixing programs
- Hydraulic tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	300L
Spare Volume	33 L
Gross Volume	333 L
Dimensions	
Width	1560mm
Height	1039mm
Depth	1161mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 2,0 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 16A
Total Heat Load	40kW Latent 1.9kW, Sensible 9.6 kW
Waste	By kitchen contractor
Net Weight	420 kg
Steam cons	90 kg/hr

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
Single kettle subsurface – 4215840
Group kettle surface – 4215843
Group kettle subsurface - 4215844

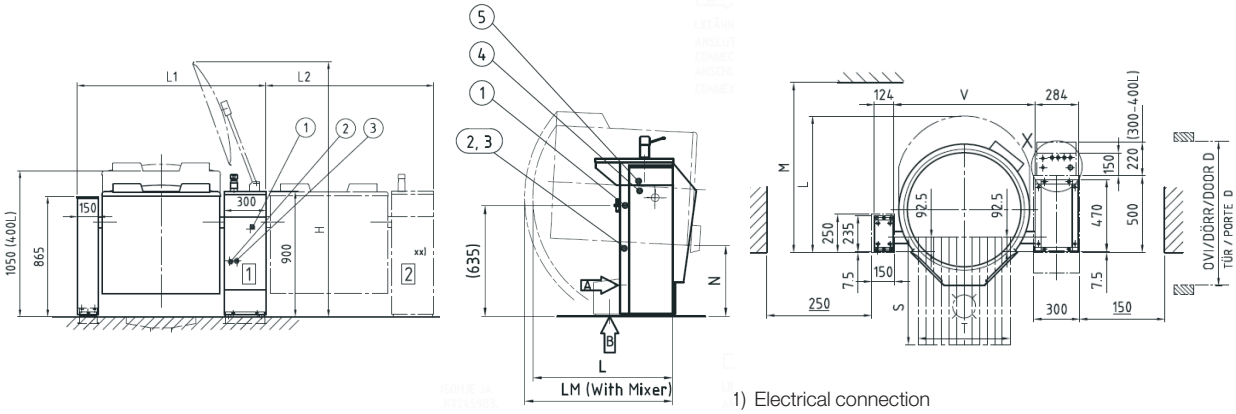

1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle
(6) Steam inlet connection
(7) Steam condensate outlet

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
300S	1560	1410	1190	1135	1135	2100	800	600	1165	450	1126

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab