


SIDE TO SIDE DOUBLE HOB INDUCTION COOKTOP

NON-TOUCH DISPLAY



FREESTANDING, HELIOS STANDARD



DROP-IN, HELIOS STANDARD

TOUCH DISPLAY



FREESTANDING, HELIOS TOUCH

FEATURES

- Helios STANDARD with 2 individual rotary control knobs and power/temperature button. Free-standing or drop-in
- Helios TOUCH with capacitive touch screen AND single rotary control (switchable to control each side). Freestanding only
- 5kW, 6kW or 7kW 240V single phase (2 x 2.5kW, 2 x 3.0kW or 2 x 3.5kW per hob)
- Freestanding or drop-in design with stainless steel housing
- Side by Side orientation
- TOUCH model with rotary control knob PLUS capacitive touch screen. Colour screen can be viewed from any angle
- High-quality electronics and heavy gauge Litz wire for maximum control and reliability
- Easy-to-clean high temperature ceramic-glass top
- Even heat distribution across bottom of cookware*
- Automatic pan detection for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Washable metal grease filter (free-standing units)
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

INCLUDED


- FIVE year parts and labour warranty (UK & Ireland only)
- Standard Cat 5e or Cat 6 patch cable from unit to control box (drop-in only)
- Plug and cord (2m nominal)




*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.


**HELIOS STANDARD
FREESTANDING**

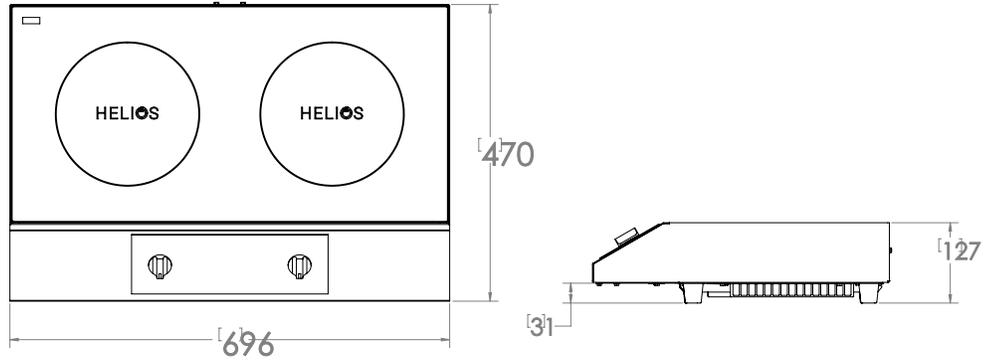

**HELIOS STANDARD
DROP-IN**

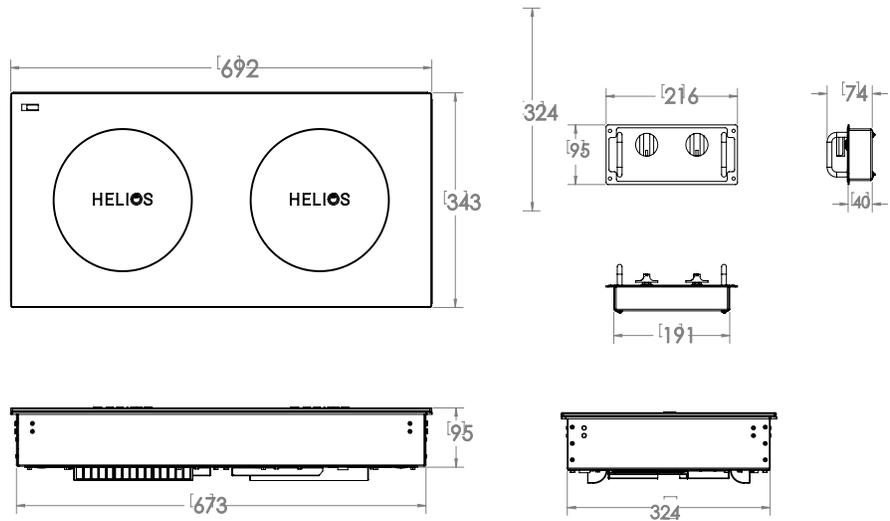

**HELIOS TOUCH
FREESTANDING**

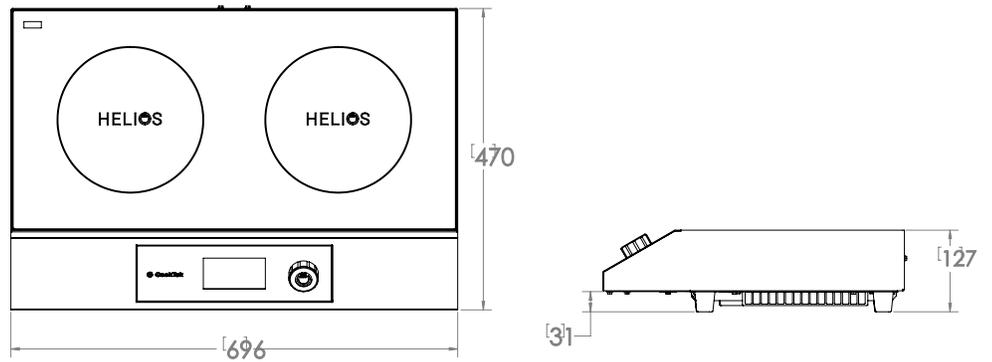

Model numbers, Part numbers and electrical specs below apply to UK and Ireland only

DIMENSIONS - HELIOS STANDARD FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	27.4"	696 mm
Full Unit Depth	18.5"	470 mm
Feet Height	1.2"	31 mm
Weight	31 lb.	14 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
DIMENSIONS - HELIOS STANDARD DROP-IN		
Full Unit Height	3.7"	95 mm
Full Unit Width	27.3"	692 mm
Housing Width	26.5"	673 mm
Full Unit Depth	13.5"	343 mm
Housing Depth	12.8"	324 mm
Cutout Width	26.88"	683 mm
Cutout Depth	13.13"	334 mm
Weight	30 lb.	13.6 kg
Max Ambient Temperature	122°F	50°C
Internal Cooling Fan Displacement 140 CFM (4.0m3/min) Free air flow required.		
WALL CLEARANCE*		
Front	Sides	Rear
2"	2"	51 mm
DIMENSIONS - HELIOS TOUCH FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	27.4"	696 mm
Full Unit Depth	18.5"	470 mm
Feet Height	1.2"	31 mm
Weight	31 lb.	14 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

SHIPPING INFORMATION		
Packaged Height	11"	279 mm
Packaged Width	32"	813 mm
Packaged Depth	23"	584 mm
Packaged Weight	40 lb.	18.14 kg
Item Class	250 NMFC #26710	

UK and Ireland Distributor:



MCS Technical Products Ltd
Building 2 Westmead Ind Est, Westmead
Drive Swindon, SN5 7YT, UK

+44(0) 1793 538308
sales@mcstechproducts.co.uk
www.mcstechproducts.co.uk

*The provided clearances apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.

Helios STANDARD Double Induction Hob Freestanding Side by Side		
NEW CookTek Helios STANDARD Induction Unit, freestanding/ countertop, double hob, side by side, 2 rotary controls, 20 power levels plus temperature setting, stainless steel exterior, washable air filter, FIVE YEAR parts and labour warranty by MCS engineers		
Model No.	Part No.	Electrical spec
HRF-SS2502 (Supersedes MC2502S)	HRF-9500-SS25-2	5.0kW (2 x 2.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRF-SS3002 (Supersedes MC3002S)	HRD-9500-SS30-2	6.0kW (2 x 3.0kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRF-SS3502 (Supersedes MC3502S)	HRD-9500-SS35-2	7.0kW (2 x 3.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF

Helios STANDARD Double Induction Hob Drop-in Side by Side		
NEW CookTek Helios STANDARD Induction Unit, drop-in, double hob, side by side, separate control box with 2 rotary controls, 20 power levels plus temperature setting, stainless steel exterior, FIVE YEAR parts and labour warranty by MCS engineers		
Model No.	Part No.	Electrical spec
HRD-SS2502 (Supersedes MCD2502S)	HRD-9500-SS25-2	5.0kW (2 x 2.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRD-SS3002 (Supersedes MCD3002S)	HRF-9500-SS30-2	6.0kW (2 x 3.0kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRD-SS3502 (Supersedes MCD3502S)	HRF-9500-SS35-2	7.0kW (2 x 3.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF

Helios TOUCH Double Induction Hob Freestanding Side by Side		
NEW CookTek Helios TOUCH Induction Unit, countertop, double hob, side by side, touch controls and 1 rotary control for both hobs, 100 power levels plus temperature setting, colour LCD display, stainless steel exterior, washable air filter, FIVE YEAR parts and labour year warranty by MCS engineers		
Model No.	Part No.	Electrical spec
HTF-SS2502	HTF-9500-SS25-2	5.0kW (2 x 2.5kW) 240V/50/1 32A round bklue 3 pin plug. CE, NSF
HTF-SS3002	HTF-9500-SS30-2	6.0kW (2 x 3.0kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HTF-SS3502	HTF-9500-SS35-2	7.0kW (2 x 3.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF