

ALFA43XUK

Product Family	Ovens
Subfamily	Convection ovens
Oven type	Convection oven
Oven controls	Mechanical
Tray capacity	4 trays 435x320 mm
Default power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
App for recipe development and upload	Not available
Product width	602 mm
Product depth	641 mm
Product height	537 mm
Maximum depth with open door	993 mm
Adjustable feet	Yes
Net weight (kg)	32.700 kg



Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry & bakery test kitchen; Butcher's shops; QSR
-----------------	--

Aesthetics


Colour	Stainless steel	Front panel	Yes
Door with stainless steel strip	Yes	Logo	Smeg printed

Controls

Adjustable timer	1-60 minutes + continuous
------------------	---------------------------

Programs / Functions

Cooking functions



Fan assisted

Options



Other versions	ALFA43UK version with English plug; ALFA43K version 60Hz; ALFA43KSA version 60Hz with English plug	Condense hood	Restaurants/Catering
-----------------------	--	----------------------	----------------------

Accessories Included

Flat aluminium tray 3820	4 x trays
---------------------------------	-----------

Construction

Oven material	Stainless steel/glass/plastics	Exhaust exit	Back
Cavity dimensions (WxDxH)	460x360x425mm	Time adjustment	Electromechanical timer
Internal net volume	54.5 lt	Temperature range	50-250°C
Cavity material	Easy clean enamel	End of cooking alarm	Yes
No. of shelves	4	Orange light indicator when t° achieved	Yes
Tray support frame	Chrome	Green light indicator when time achieved	Yes
Distance between shelves	80 mm	Manual safety thermostat reset	Yes
Door construction	Yes	Removable deflector	Yes
Door opening	Drop down	No. of lights	1 Halogen light
Handle type	Smeg	Light power	40 W
Inner glass	Removable	Plug	UK 3 pin
Fan type and number	1	Power cable length	115 cm
Fan motor power	Double speed	Back panel	Galvanized
Fan speed	Single speed	IPX protection	Scheduled start H/12
Max motor speed (rpm)	2700 rpm		

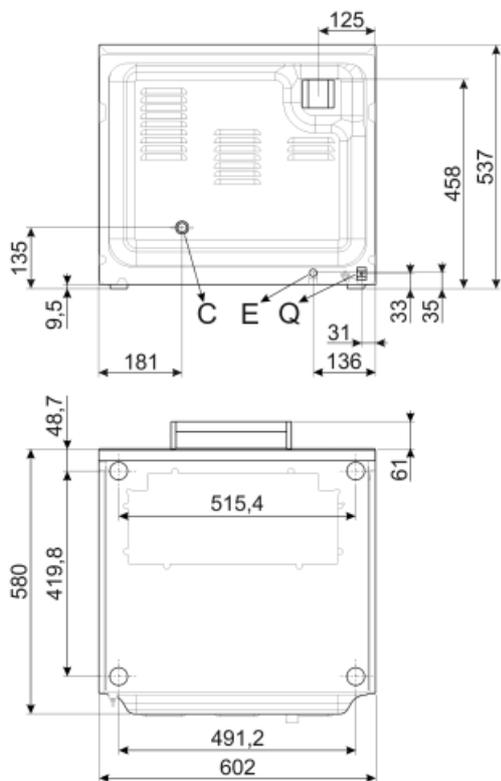

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO (solo su alcuni modelli) FILLER HOSE (on some models only)

Not included accessories



3780
Flat non-stick trays



3755
Flat perforated aluminium tray



3926
Air flow reducer kit

Symbols glossary



Fan forced