

4-ZONE ELECTRIC GLASS-CERAMIC COOKER

Project:
Rev.:
Zone:
Location:



CODICE
CR0990649

MODELLO
D94/10TVTC

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Unbreakable ceramic glass top. Cooking zone (270x270mm) marked with square silk-screen printing, indicating the size of the container to be used. Single zone power of 4 kW. Temperature adjustable by thermostat from 70 to 450°C.

Unbreakable flush-mounted glass for easy handling of pans.

The temperature is regulated by means of an energy regulator, which allows two heating zone widths to be selected according to the size of

the pan bottom.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

4-ZONE ELECTRIC GLASS-CERAMIC COOKER

Project:
Rev:
Zone:
Location:



CODICE
CR0990649

MODELLO
D94/10TVTC

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0990649
DEFINITION	D94/10 TVTC GLASS CERAMIC 4Z. TOP
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	88,000 Kg
VOLUME (net)	0,180
PACKAGE LENGTH	0,000 mm
PACKAGE WIDTH	0,000 mm
PACKAGING HEIGHT	0,000 mm
PACKAGE VOLUME	0,400 m3
GROSS PACKING WEIGHT	97,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	16,000 kW
IP GRADE	IPX5
CERTIFIED MODEL	D94/10 TVTC

4-ZONE ELECTRIC GLASS-CERAMIC COOKER

Project:
 Rev:
 Zone:
 Location:


CODICE
 CR0990649

MODELLO
 D94/10TVTC

SERIE
 DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

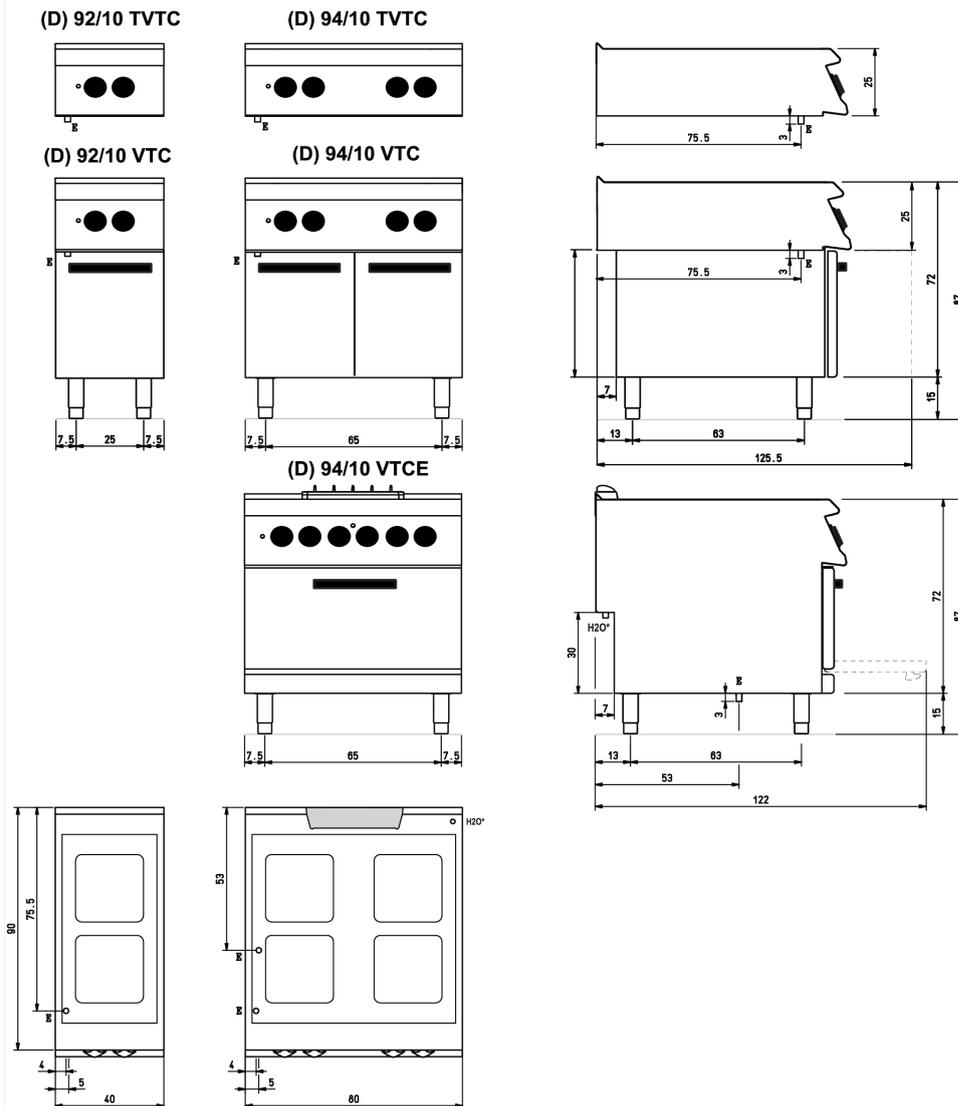

Legenda - Legende - Key - Légende - Leyenda - Legenda

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

H20* Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 1/2

4-ZONE ELECTRIC GLASS-CERAMIC COOKER

Project:
Rev:
Zone:
Location:



CODICE
CR0990649

MODELLO
D94/10TVTC

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Unbreakable flush-mounted glass for easy handling of pans.



The temperature is regulated by means of an energy regulator, which allows two heating zone widths to be selected according to the size of the pan bottom.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



4-ZONE ELECTRIC GLASS-CERAMIC COOKER

Project:
Rev:
Zone:
Location:



CODICE
CR0990649

MODELLO
D94/10TVTC

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1355469	D94/10B	Open base 80cm series 90
CR0996979	DBVP4	
CR0997009	DBVPA4	
CR0997029	DAPC	
CR0997019	DAPD	
CR0997039	DAPS	
CR0997049	DAPM	
CR0997059	DAPDB	
CR1353589	DBVC4	
CR0592679	94/10 BH	Open base - hygienic finish H2 80cm series 90
CR1353569	DRG21	
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment