

Combitherm® CTP7-20E

Electric Boiler-free

ALTO-SHAAM

Combining multiple cooking functions into a single appliance, Combitherm® ovens provide endless versatility, reliability and unmatched performance. An all-in-one solution for efficient and consistent food production. Combitherm ovens do the work of a convection oven, kettle, steamer, fryer, smoker and more. Execute every dish, no matter how simple or complex, faster than ever with flawless precision and consistency.

Standard features

- Four cooking modes—steam, convection, combination, and retherm
- Programmable, touchscreen control
- Easy recipe upload/download via USB port
- Five fully automated cleaning cycles
- Front-accessible and retractable rinse hose
- LED illuminated door handle is designed for the needs of the busy kitchen, and provides visual notification of the oven status
- Absolute Humidity Control™ allows for selection any humidity level from 0-100% to maximize food quality, texture, and yield
- CoolTouch3™ triple panel glass door keeps the heat inside, while keeping the glass cool to the touch and providing 15% greater thermal retention to improve performance and efficiency
- SafeVent™ provides automatic steam venting at the end of the cooking cycle



CAPACITY

- 8** Eight full-size sheet pans; eight GN 2/1 pans; sixteen half-size or GN 1/1 pans, two rows deep
- 2** Two side racks with eight non-tilt support rails; 19-7/8" [505mm] horizontal width between rails, 2-3/4" [70mm] vertical spacing between rails
- 168 lb [76 kg] product maximum
- 105 quarts [133 liters] volume maximum
- Four [4] wire shelves included. Additional wire shelves required for maximum capacity.

Condensable Particulate Matter (CPM) emissions produced through the most aggressive testing methods available were measured at 0.77 mg/m³ for 11,660 beef patties which is below the maximum allowable level of 5.0 mg/m³ established by EPA test method 202. This product is UL listed under KNLZ in the U.S. and Canada.

Cooking appliance with integral systems for limiting the emission of grease laden air IP35



This oven complies with UL 710B, section 17 COA #5760



CTP7-20E

Configurations (select one)

- ☐ Boiler version ☐ PROpower™

Door swing

- ☐ Right hinged
- ☐ Recessed door, optional [not available on ventless hood]

Electrical

- ☐ 208-240V 1ph ☐ 208-240V 3ph
- ☐ 380-415V 3ph ☐ 440-480V 3ph

Accessories (select all that apply)

- ☐ CombiHood PLUS™
- ☐ CombiLatch™
- ☐ Stacking hardware
- ☐ Seismic feet package, optional
- ☐ Smoking feature - including one-step cold smoking [not available on units with security devices]
- ☐ Extended one-year warranty
- ☐ Automatic grease collection system, includes four 6-piece, self-trussing poultry racks #5014438, interior drip collection pan, and grease collection container with shut off valve

Cleaning

- ☐ Automatic tablet-based cleaning system, standard
- ☐ Automatic liquid cleaning system, optional

Probe choices

- ☐ Removable, single-point, quick-connect core temperature probe, standard
- ☐ Removable, single-point, quick-connect sous vide temperature probe, optional
- ☐ Hard-wired, multi-point core temperature probe, optional [factory only installed]

Security devices for correctional facility use

- ☐ Optional base package [not available with recessed door]: includes tamper-proof screw package, excludes temperature probe
- ☐ Anti-entrapment device, optional
- ☐ Control panel security cover, optional
- ☐ Hasp door lock [padlock not included], optional
- ☐ Removable, single-point, quick-connect core temperature probe, optional


Installation options (select one)

- ☐ Alto-Shaam Combination Factory Authorized Installation Program - available in the U.S. and Canada only
- ☐ Installation Start-Up Check - available through an Alto-Shaam authorized service agency

Combitherm® CTP7-20E

Specification

ALTO-SHAAM

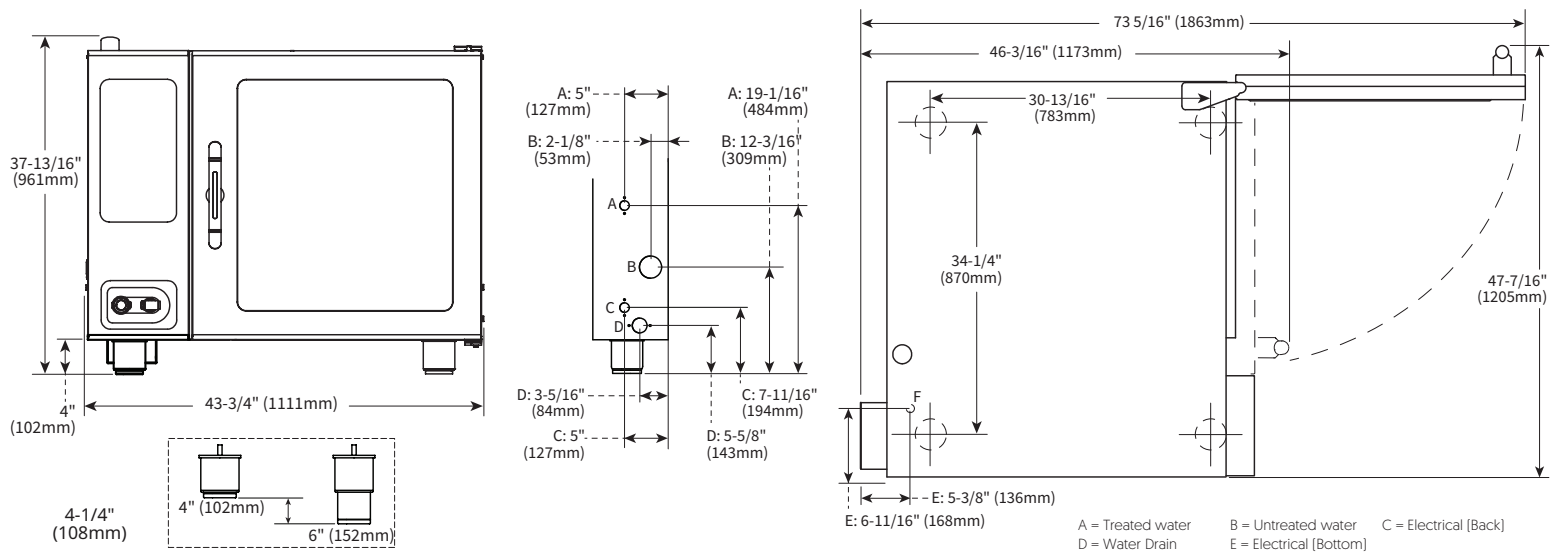

CT-DIM-005362



Model

CTP7-20E

Exterior (H x W x D)

37-13/16" x 43-3/4" x 46-3/16" [961mm x 1111mm x 1173mm]

Exterior with recessed door (H x W x D)

37-13/16" x 48-3/4" x 46-3/16" [961mm x 1238mm x 1173mm]

Ship Dimensions (L x W x H)*

CTP7-20E 56" x 49" x 65" [1422mm x 1245mm x 1651mm]

*Domestic ground shipping information. Contact factory for export weight and dimensions.

Interior (H x W x D)

23-1/4" x 24-1/4" x 32-3/4" [590mm x 616mm x 832mm]

Net Weight

680 lb [308 kg]

Ship Weight*

727 lb [330 kg]



CLEARANCE

Top:	20" [508mm]
Left:	0" [0mm]
	18" [457mm] recommended service access
Right:	0" [0mm] Non-combustible surfaces
	2" [51mm] combustible surfaces
Bottom:	5-1/8" [130mm]
Back:	4" [102mm]
	4-5/16" [109mm] optional plumbing kit



CHECK FIRST

- Oven must be installed level.
- Water supply shut-off valve and back-flow preventer when required by local code.
- Hood installation is required.
- Drain must not be located directly underneath the appliance.



HEAT

Heat of rejection

CTP7-20E	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	1,305	0.38



NOISE

Noise emissions

Without hood system, a maximum 67 dBA was measured at 3.3 ft [1 m] from unit.

With hood system, a maximum 81 dBA was measured at 3.3 ft [1 m] from unit.



CTP7-20E					ECO Standard			PROpower™ Option**			Connection	Certification
	V	Ph	Hz	Awg	A	Breaker	kW	A	Breaker	kW		
208-240V	208	1*	50/60	1	79.1	80	16.5	92.1	100	19.2	L1, L2/N, G	
	240	1*	50/60	1/0	91.3	100	21.9	106.3	110	25.5	L1, L2/N, G	
208-240V	208	3	50/60	4	45.7	50	16.5	58.7	60	19.2	L1, L2, L3, G	
	240	3	50/60	3	52.7	60	21.9	67.7	70	25.5	L1, L2, L3, G	
380-415V	380	3	50/60	6	28.0	32	18.7	41.7	63	21.4	L1, L2, L3, N, G	
	415	3	50/60	4	30.4	32	21.9	45.4	63	25.5	L1, L2, L3, N, G	
440-480V	440	3*	50/60	8	20.6	25	15.7	26.5	30	18.3	L1, L2, L3, G	
	480	3*	50/60	8	22.4	25	18.7	28.8	35	21.8	L1, L2, L3, G	

Electrical connections must meet all applicable federal, state, and local codes. No cord, no plug, dedicated circuit required.

*Electrical service charge applies.

**No-cost option on electric models.

With CombiSmoker® Option					ECO Standard			PROpower™ Option**			Connection	Certification
CTP7-20E	V	Ph	Hz	Awg	A	Breaker	kW	A	Breaker	kW		
208-240V	208	1*	50/60	1	81.6	90	17.0	94.6	100	19.7	L1, L2/N, G	
	240	1*	50/60	1/0	94.1	100	22.6	109.1	110	26.2	L1, L2/N, G	
208-240V	208	3	50/60	4	48.2	50	17.0	61.2	70	19.7	L1, L2, L3, G	
	240	3	50/60	3	55.6	60	22.6	70.6	70	26.2	L1, L2, L3, G	
380-415V	380	3	50/60	6	30.6	32	19.3	44.4	63	22.0	L1, L2, L3, N, G	
	415	3	50/60	4	33.3	63	22.6	48.3	63	26.2	L1, L2, L3, N, G	
440-480V	440	3*	50/60	8	21.9	30	16.2	27.3	30	18.1	L1, L2, L3, G	
	480	3*	50/60	8	23.8	30	19.2	30.0	35	22.3	L1, L2, L3, G	

Electrical connections must meet all applicable federal, state, and local codes. No cord, no plug, dedicated circuit required.

*Electrical service charge applies.

**No-cost option on electric models.



Water requirements (per oven)

- Two cold water inlets - drinking quality
- One treated water inlet: 3/4" NPT connection. Line pressure 30 psi minimum dynamic and 90 psi maximum static [200-600 kPa] at a minimum flow rate of 0.26 gpm [1 L/min].
- One untreated water inlet: 3/4" NPT connection. Line pressure 30 psi minimum dynamic and 90 psi maximum static [200-600 kPa] at a minimum flow rate of 2.64 gpm [10 L/min]. Water drain: 1-1/2" [40mm] connection with a vertical vent to extend above the exhaust vent. Materials must withstand temperatures up to 200°F [93°C].



Clearance requirements for water filtration system

Do not install a water filtration system behind unit.

Water Quality Standards

It is the sole responsibility of the owner/operator/purchaser of this equipment to verify that the incoming water supply is comprehensively tested and, if required, a means of "water treatment" provided that would meet compliance requirements with the published water quality standards shown below. Non-compliance with these minimum standards will potentially damage this equipment and/or components and void the original equipment manufacturer's warranty. Alto-Shaam recommends using OptiPure [www.optipurewater.com] products to properly treat your water.

Contaminant	Inlet Water Requirements
Free Chlorine	Less than 0.1 ppm [mg/L]
Hardness	30-70 ppm
Chloride	Less than 30 ppm [mg/L]
pH	7.0 to 8.5
Silica	Less than 12 ppm [mg/L]
Total Dissolved Solids [tds]	Treated line: 50-125 ppm
	Untreated line: 50-360 ppm

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.

Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com