Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
B-G705 I NG

19074782 18/11/2021

DENOMINATION:

GN gas grill, stainless steel grill, half module, 700 range.

DESCRIPTION :

- Stamped surface tops manufactured in 1.5 mm thick AISI-304 stainless steel
- Laser-cut joints and automatic welding. Hidden screws.
- Fitted with an opening to collect cooking grease and a tray to store it.
- Machines are fitted with removable 130 mm high guards to prevent splashes, made of stainless steel.
- High temperature enamelled cast iron flue protector.
- Access to the components from the front.
- Machines with IPX5 grade water protection.
- The models with stainless steel grills are manufactured using “Z” shaped AISI-304 stainless steel slats to make cleaning easier.
- These grills reach a very high temperature (400 ºC), meaning that the surface of the product is quickly sealed and inside it remains much juicier.
- Groups of high-efficiency tube burners, (a group of two burners for half-sized module models, two groups for whole module models).
- Independent control for each group of burners via a safety valve with a thermocouple.
- Burners turned on using Piezo electric ignition.
- The burners heat ceramic stones that sit on a supporting rack, so that they can then heat food on the grill.

POSSIBLE OPTIONS :

- 230 1N- Transformation A 230 V single phase
- 230 III - A 230 V three-phase transformation without neutral
- MARINE - Other machines - Ship transformation - 440 III

POSSIBLE ACCESSORIES :

- REFRIGERATED STANDS
- ACCESSORIES KORE
- STANDS 700
- ACCESSORIES FOR CHARCOALS KORE
- KORE WHEELS
- TALL CHIMNEY KORE

SUPPLIED ACCESSORIES:

- 19058313 Scraper for charcoal with stainless steel grill Kore generation 1

DIMENSIONS



X Width	400	mm	X Gross width	440	mm
Y Depth	730	mm	Y Gross depth	822	mm
Z Height	290	mm	Z Gross height	535	mm
Net Weight	28,5	kg	Gross Weight	41,5	kg
Net volume	0,080	m3	Gross volume	0,193	m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	N/A

GAS TECHNICAL SPECIFICATIONS

Gas type	NG
Gas power	8,10 kW
Gas consumption	0,857 m3/h
Regulated	LPG G30/G31 28-30/37 mbar
	NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS

Gas diameter 1	R3/4"

Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
B-G705 I NG

19074782 18/11/2021

B-G705

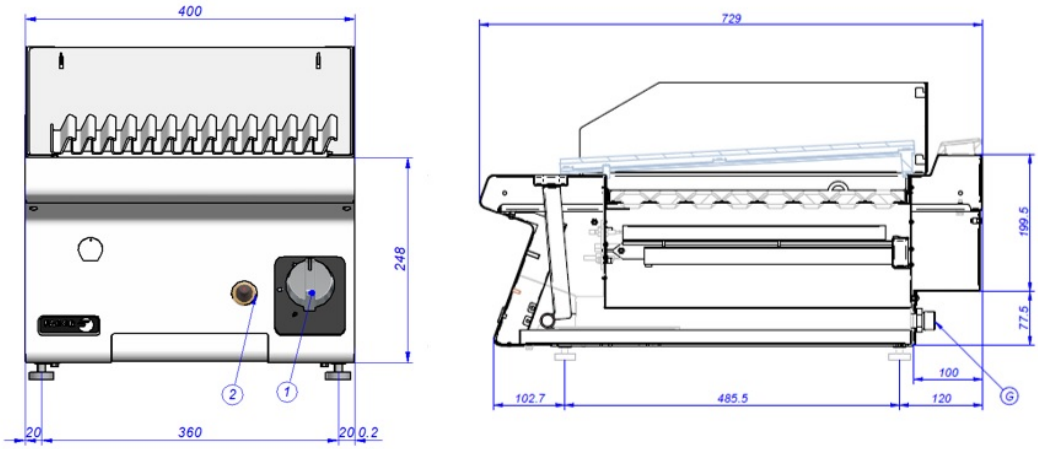

B-G710

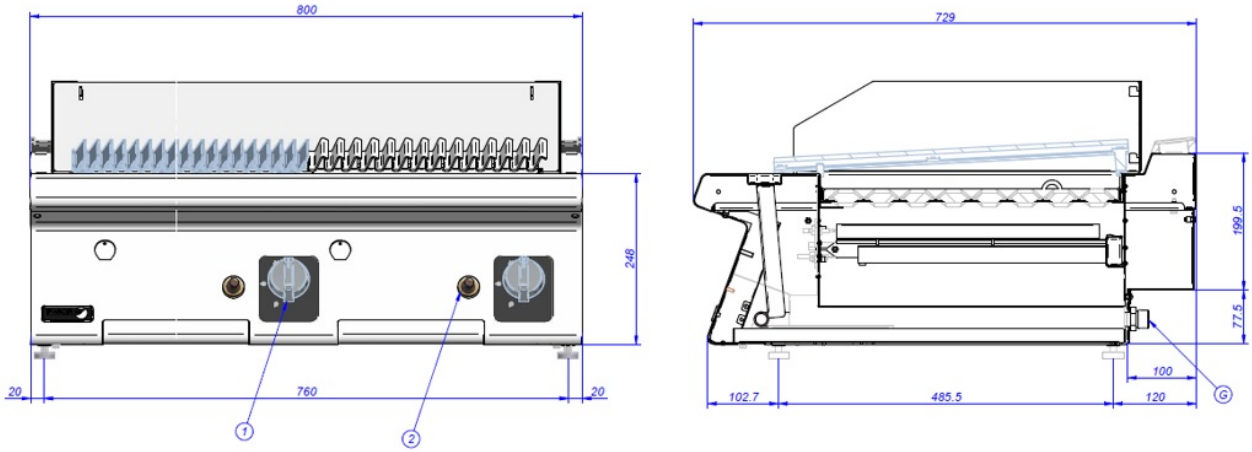

G – Entrada de Gas	Gas Inlet	Entrée de gaz
1 – Grifo válvula de gas	Gas valve tap	Robinet valve gaz
2 – Pulsador de encendido	Piezoelectric ignitor	Allumeur piézoélectrique