

7CLM+ FILTER CARTRIDGE

Part Number:
EV977100 1 PK



CARTRIDGE DESCRIPTION

Enhance beverage quality and help protect foodservice equipment with the **Everpure 7CLM+** water filtration cartridge. Engineered for fountain beverage applications, it reduces chloramines, chlorine, tastes & odors, and sediment to help deliver consistent beverage quality while supporting equipment performance and longevity. Certified chloramine and chlorine reduction up to 8,000 gallons at a flow rate of 1.67 gpm.

FEATURES • BENEFITS

- ◆ High-performance, catalytic carbon block technology is engineered to reduce chloramines
- ◆ Reduces particulates, tastes & odors, chloramines, and chlorine that can adversely affect the taste of beverages
- ◆ Compatible with QC7I, Coldrink® and High Flow CSR heads
- ◆ Effectively filters dirt and particles as small as 5 microns in size
- ◆ Easy, sanitary, quick-change filter replacement
- ◆ NSF/ANSI Standard 42 certified for the reduction of Chloramines, Chlorine, Taste & Odor, and Particulate Class III

APPLICATIONS


- ◆ Fountain beverage

INSTALLATION TIPS

- ◆ Always flush the cartridge at time of installation and cartridge change.
- ◆ Do not exceed cartridge specifications for temperature and pressure.
- ◆ For more details, see the installation and operation guide included with your Everpure system.

7CLM+ FILTER CARTRIDGE

EV977100

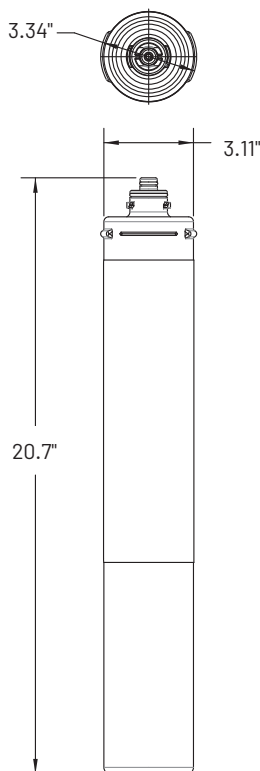

SPECIFICATIONS

System	Performance
Overall Dimensions 20.70" L x 3.34" dia (52.58 x 8.48 cm)	Service Flow Rate - Maximum 1.67 gpm (6.3 lpm)
Operating Pressure (non-shock) 10 – 125 psi (0.7 – 8.6 bar)	Rated Capacity Chloramines 8,000 gallons (30,283 L) 15,000 gallons (56,781 L)*
Water Temperature 35 – 100°F (2 – 38°C)	Rated Capacity Chlorine 8,000 gallons (30,283 L) 15,000 gallons (56,781 L)*
Shipping Weight 4.6 lbs (2.09 kgs)	Chloramines Reduction Yes
Electrical Connection None required	Chlorine Reduction Yes
	Taste & Odor Reduction Yes
	Particulate Reduction Yes

*As tested by Pentair at a flow rate of 1 gpm.

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>.
To receive a free copy email or call your Pentair representative using the information provided below.

Replace all filter cartridges every six (6) months as part of a regular scheduled program and no less than once per year. In multiple-cartridge systems, all primary quick-change cartridges must be replaced simultaneously.

The substances reduced by this drinking water device are not necessarily in your water.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

PRIMARY FILTER FOR THE FOLLOWING SYSTEMS

Model	Qty	Part No	Model	Qty	Part No
QC7I Single 7CLM+	1	EV977111	HF CSR Twin 7CLM+	2	EV977132
QC7I Twin 7CLM+	2	EV977112	HF CSR Triple 7CLM+	3	EV977133
QC7I Triple 7CLM+	3	EV977113	HF CSR Quad 7CLM+	4	EV977134
QC7I Quad 7CLM+	4	EV977114			
Coldrink 1 7CLM+	1	EV977121			
Coldrink 2 7CLM+	2	EV977122			
Coldrink 3 7CLM+	3	EV977123			
Coldrink 4 7CLM+	4	EV977124			



System Tested and Certified by NSF International against ASSE/ANSI 1087 and NSF/ANSI Standard 42 for the reduction of:

STANDARD NO. 42 –
AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chloramine
Chlorine

Mechanical Filtration
Nominal Particulate Class III



1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2026 Pentair. All rights reserved.

EV977100 JL26