

Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT - Variable Speed - UK Plug

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


600483 (TRK45YG)

Combined Cutter/Vegetable Slicer, variable speed 300 to 3700 rpm. Supplied with 4,5 lt stainless steel Cutter bowl and lever operated feed hopper (UK)

Short Form Specification

Item No.

3 in 1 machine: cutter, emulsifier and slicer to slice, grate, liquidise, mix and mince in a matter of seconds. Easily change from vegetable slicer to food processor without any tool.

All parts in contact with food are removable, dismountable and dishwasher safe. Incl system to change the motor base orientation (20°) to facilitate loading and unloading operations with the vegetable slicer attachment.

Vegetable slicer attachment: Universal vegetable slicer offering more than 80 different types of cuts. Long vegetable hopper (60mm diameter) integrated in the wide 3/4 moon stainless steel round hopper (215cm²). User-friendly stainless steel lever (better pressure control, with less effort for arms and shoulder), designed for right and left handed users. High discharge zone (up to 20cm) for GN containers. Automatic start/stop function will stop the machine when the lever hopper is lifted and will restart automatically when lowered.

Cutter-mixer: Stainless steel 4,5 litre bowl with unique design for mixing both large or small quantities. Unique high chimney increases the real capacity of the bowl (use up to 75% of nominal capacity). Transparent lid to check consistency of food and to eventually add ingredients without having to open the lid. Hinged cover, when lifted, remains open to permit a fast and easy check of preparation. Ergonomic and easily dismountable scraper, in heavy duty composite material, for better homogenization. Micro toothed blades in 420 AISI stainless steel. Multiple safety devices ensure the machine will only operate when the cover is properly closed and all parts are correctly

positioned.

Asynchronous industrial motor for heavy duty and longer life. Flat and waterproof control panel with on/off button, pulse function and variable speed (from 300 to 3700 rpm). UK plug.

Main Features

- 3 in 1 machine: cutter, emulsifier and vegetable slicer to slice, grate, liquidise, mix and mince in a matter of seconds.
- Incl system to incline motor base at 20° to better fit the vegetable slicer attachment.
- Delivered with:
 - Stainless steel lever operated feed hopper
 - 4,5 lt stainless steel cutter bowl, transparent lid, scraper and microtoothed blade rotor
- Vegetable slicer unit has slicing, grating, shredding (julienne) as well as dicing and french fries capabilities.
- Long vegetables round hopper integrated in the feed arm, 3/4 moon roundish hopper to limit pre cutting operations.
- Emulsifier function (scraper) included as standard.
- Base fixed cover for a better handling.
- Pulse function to coarse chopping.
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Automatic restart of the machine with the 3/4 moon shaped pusher in position.
- Magnetic safety system and motor brake. Prevents machine from running when vegetable preparation lever and/or hopper are lifted or when cutter lid is not properly closed.
- Automatic speed limitation according to the selected function (slicer or cutter).
- Complete and wide selection of blades and grids available (diam. 205 mm).
- Capacity:
 - vegetable slicer productivity 550 kg/h, suitable for 100-400 meals for table service, up to 800 meals for catering service
 - cutter mixer working capacity from 100 g to 2 kg, for 50-80 meals per service

Construction

- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- Stainless steel bowl has a high chimney to ensure high productivity also when processing liquids.
- Feeding arm and hopper are made entirely in stainless steel. Aluminium motor housing.
- Vegetable cutting at 4 speeds up to 800 rpm. Food processing at 10 variable speeds: 300-3700 rpm.
- Power: 1.3 HP.
- IPX5 (IP55) flat panel touch-control, waterproof panel.
- Compact and portable design.
- All blades (available on request) are made in stainless steel and dishwasher safe.
- Improved ventilation system to manage smoothly

APPROVAL: _____

heavy duty use.

- Improved incl system for better stability.
- Improved fixing of long vegetable hopper pusher.

Included Accessories

- 1 of Lid and bowl scraper for 4,5 lt cutter PNC 650099 mixer
- 1 of Microtoothed blade rotor for 4,5 lt PNC 653580 cutter mixer
- 1 of Stainless steel bowl for 4,5 lt cutter PNC 653589 mixer
- 1 of Ejector disc PNC 653772

Optional Accessories

- Microtooth blade rotor (emulsifier) for PNC 650039 4,5 lt cutter mixer
- Stainless steel shredding disc with S- PNC 650077 blades 4x4 mm
- Stainless steel shredding disc with S- PNC 650078 blades 6x6 mm (can also be used for French fries)
- Stainless steel shredding disc with S- PNC 650079 blades 8x8 mm (can also be used for French fries)
- Stainless steel shredding disc with S- PNC 650080 blades 10x10 mm (can also be used for French fries)
- Stainless steel pressing/slicing disc with PNC 650081 S-blades 0,6 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650082 S-blades 1 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650083 S-blades 2 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650084 S-blades 3 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650085 S-blades 4 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650086 S-blades 5 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650087 S-blades 6 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650088 S-blades 8 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650089 corrugated S-blades 2 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650090 corrugated S-blades 3 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650091 corrugated S-blades 6 mm (can be used for slicing or combined with grids)
- Bistrot Pack-set stainless steel discs PNC 650092 (2mm and 5mm slicing pressing disc, 2mm grating disc)
- Gastronomy Pack-set stainless steel PNC 650093 discs (2mm, 5mm and 10mm slicing pressing discs, 2mm grating disc, 4x4mm shredding disc, 10x10mm dicing grid)
- Emulsifying kit for TRK, K45 variable PNC 650100 speed, including 4,5 lt ss bowl, smooth emulsion blade, lid and scraper

- Set of 3 stainless steel discs for Pizza (2mm PNC 650107 and 4mm pressing/slicing discs with S-blades, 7mm grating disc)
- Cleaning tool for TRS, TRK & TR210 5-8-10 PNC 650110 mm dicing grids
- Dicing set 10X10X10MM (10mm aluminum PNC 650112 slicing pressing disc with 205mm diam. and 10mm grid) - available from July 2020
- Aluminum pressing/slicing disc with straight PNC 650115 blades 10 mm - available from July 2020
- Aluminum pressing/slicing disc with straight PNC 650116 blades 8 mm - available from July 2020
- Stainless steel shredding disc with S-blades PNC 650158 2x8 mm
- Stainless steel shredding disc with S-blades PNC 650159 2x10 mm
- Stainless steel pressing/slicing disc with S- PNC 650160 blades 10 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with S- PNC 650161 blades 12 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650162 corrugated S-blades 8 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with PNC 650164 corrugated S-blades 10 mm (can be used for slicing or combined with grids)
- Stainless steel pressing/slicing disc with S- PNC 650165 blades 13 mm (can be used for slicing or combined with grids)
- Stainless steel shredding disc with S-blades PNC 650166 2x2 mm
- Stainless steel shredding disc with S-blades PNC 650167 3x3 mm
- Set of 4 stainless steel discs (2mm and 5mm PNC 650178 slicing pressing discs, 2mm and 7mm grating discs)
- Set of 7 stainless steel discs (2mm, 5mm PNC 650179 and 10mm slicing pressing discs, 2mm and 7mm grating discs, 4x4mm shredding disc, 10x10mm dicing grid)
- Stainless steel work table with folding PNC 653283 shelves and disk rack for TRK, TRS and TR210 table top models
- Dicing grid 5x5 mm PNC 653566
- Dicing grid 8x8 mm PNC 653567
- Dicing grid 10x10 mm PNC 653568
- Dicing grid 12x12 mm PNC 653569
- Dicing grid 20x20 mm PNC 653570
- Grid for chips 6x6 mm PNC 653571
- Grid for chips 8x8 mm PNC 653572
- Grid for chips 10x10 mm PNC 653573
- Smooth blade rotor for 4,5 lt cutter mixer PNC 653579
- Microtoothed blade rotor for 4,5 lt cutter PNC 653580 mixer
- Stainless steel bowl for 4,5 lt cutter mixer PNC 653589
- Smooth blade rotor (emulsifier) for 4,5 lt PNC 653614 cutter mixer
- Ejector disc PNC 653772
- Stainless steel grating disc 2 mm PNC 653773
- Stainless steel grating disc 3 mm PNC 653774
- Stainless steel grating disc 4 mm PNC 653775



Electrolux
PROFESSIONAL

**Vegetable Slicer
TRK45 Cutter Slicer - 4.5 LT -
Variable Speed - UK Plug**

- Stainless steel grating disc 7 mm PNC 653776
- Stainless steel grating disc 9 mm PNC 653777
- Stainless steel grating disc for knoedeln and bread PNC 653778
- Stainless steel grating disc for parmesan and bread PNC 653779




**Vegetable Slicer
TRK45 Cutter Slicer - 4.5 LT - Variable Speed - UK Plug**


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2020.05.13

Front

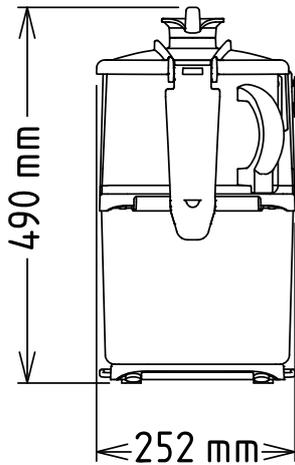


Side

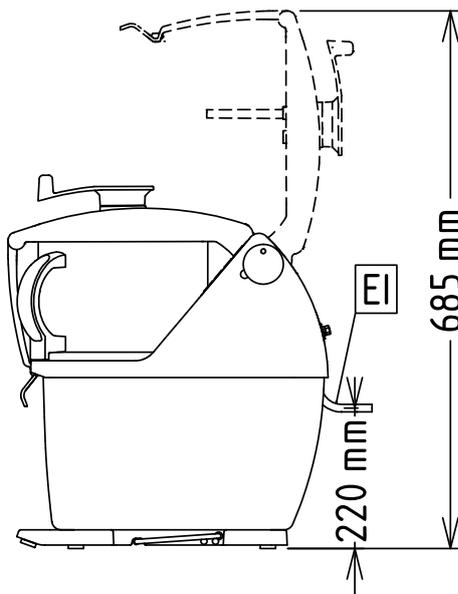

EI = Electrical inlet (power)

Top

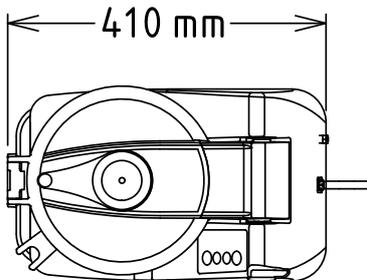

Electric

Supply voltage:

600483 (TRK45YG) 200-240 V/1N ph/50/60 Hz

Electrical power max.: 1 kW

Total Watts: 1 kW

Capacity:

Performance (up to): 550 - kg/hour

Capacity: 4.5 litres

Key Information:

External dimensions, Width: 252 mm

External dimensions, Height: 505 mm

External dimensions, Depth: 485 mm

Shipping weight: 30.5 kg