

Technical data sheet for
GRIDDLE TOASTER 600mm
G55T

- Griddle plate with toaster under
- 16mm griddle plate
- Individually controlled dual burners
- Large capacity grease collection drawer
- Rear rollers
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



G55T

Overall Construction

- 16mm machined surface mild steel griddle plate
- 2.5mm stainless steel integral splashguard
- 2.5mm stainless steel grease channel at front of plate
- Stainless steel grease collection drawer below mid shelf
- Dual burners with individual pilot and flame failure
- Stainless steel radiant reflectors on burners for efficient toasting
- Welded 1.5mm 304 stainless steel bull nose
- Splashback and hob sides 1.2mm 304 stainless steel
- Enamelled control panel
- Toasting compartment 1.2mm high temperature aluminised steel
- Base shelf and mid shelf finished in 0.9mm 304 stainless steel
- Enamelled steel spill tray
- Chrome wire toasting rack with integral crumb tray
- Chrome wire rack supports
- 63mm dia. heavy-duty 1.2mm 304 stainless steel adjustable legs at front and two rollers at rear

Controls

- Large easy use control knobs - heat resistant reinforced
- Easy view control settings on knobs
- Dual controls with variable high to low burner setting
- Flame failure pilot burners
- Piezo ignition to pilot burners

Cleaning and Servicing

- Removable grill rack system, rack supports, and crumb tray
- Removable grease drawer
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for GRIDDLE TOASTER 600mm

Specifications

Burners

2 x 6kW tubular burners with grill radiants

Gas power (gross)

12kW, 40,800 Btu/hr

Plate

16mm thick mild steel

Cooking surface 590mm x 520mm, 3068cm²

Toaster Dimensions

Rack size 430mm x 470mm

Rack positions 4

Gas connection

R 1/2 (BSP) male

Optional underside connection, please specify when ordering

All units supplied with Natural and LP gas regulator

Dimensions

Width 600mm

Depth 812mm

Height 915mm

Incl. splashback 1085mm

Nett weight

115kg

Packing data

0.70m³, 165kg

Width 645mm

Depth 870mm

Height 1255mm

Gas types

Available in Natural gas and LP gas, please specify when ordering


Units supplied complete with gas type conversion kits

Options

Adjustable feet at rear

Joining caps

Castors

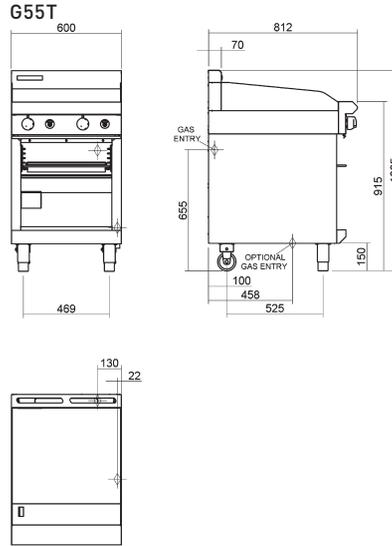

BLUE SEAL

www.blueseal.co.uk
www.bluesealevolution.com

United Kingdom Blue Seal Limited

Unit 67
Gravelly Business Park
Gravelly
Birmingham B24 8TQ
England
Telephone 0121-327 5575
Facsimile 0121-327 9711
Email sales@blue-seal.co.uk
www.blue-seal.co.uk

Australia Moffat Pty Limited

740 Springvale Rd
Mulgrave
Victoria 3170
Australia
Telephone 03-9518 3888
Facsimile 03-9518 3833
Email vsales@moffat.com.au
www.moffat.com.au

New Zealand Moffat Limited

16 Osborne St
PO Box 10-001
Christchurch 8011
New Zealand
Telephone 03-389 1007
Facsimile 03-389 1276
Email sales@moffat.co.nz
www.moffat.co.nz



Designed and manufactured by

MOFFAT

ISO9001
All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

CE

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

Printed in China
© Copyright Moffat Ltd
Moffat/4825-UK/BH/2.5M/12.06



BLUE SEAL
EVOLUTIONSERIES