



# UTENSIL WASHER UX-1300CV 230-400/50/3N DD

Rack size 1320 mm x 700 mm and door clearance 820 mm. Constant temperature rinsing system. HRS system.

1303548

WARE WASHING  
POT WASHERS



## SALES DESCRIPTION

Door clearance: 820 mm.  
Constant temperature rinsing system.  
Equipped with a steam condenser.

### Ideal to wash big sized pots and wares.

- ✓ Powerful and high pressure: specially indicated for restaurants, ice-cream shops, pastries and butcheries.
- ✓ Constructed from stainless steel.
- ✓ Door divided in two parts, perfectly counterbalanced, easy to handle.
- ✓ Double skinned machines: silent working and reduced thermal dispersions.
- ✓ Wash tank without corners to avoid dirt accumulation in angles.
- ✓ Stamped wash dispersers in stainless steel tubes.
- ✓ Easy to remove wash- and rinse dispersers.
- ✓ Safety micro switch at the door and electronic safety device to guarantee washing temperature and time.
- ✓ Advanced LCD control panel with humidity protection. Display of wash and rinse temperatures.
- ✓ Reduced water consumption.

## INCLUDES

- ✓ 1 stainless steel basket and insert for 4 trays.
- ✓ Adjustable detergent and rinse aid dosing equipment.
- ✓ HRS system: steam condenser.

## OPTIONAL

- Stainless basket.
- Drainage pump with level sensor. Proactive tank water renewal.
- Stainless carrier for trays.

## ACCESSORIES

- Stainless steel baskets
- Dosing equipments
- Manual water softeners
- Carrier for trays
- Automatic water softeners

## SPECIFICATIONS

Basket dimensions: 1320 mm x 700 mm  
 Stainless steel basket: 1  
 Equipment: supplementary trays: 1  
 Useful height: 820 mm  
 Cycles: 5  
 Cycle duration: 120 / 180 / 240 / 360 / 480"  
 Production baskets / hour: 30 / 20 / 15 / 10 / 7  
 Electrical supply: 230-400 V / 50 Hz / 3N~  
 Electrical connection: .

### Loading

- ✓ Pump: 3 Hp / 2 x 2200 W
- ✓ Tank: 9000 W
- ✓ Boiler: 12000 W
- ✓ Total loading: 16400 W
- Feed water temperature: 10°C - 60°C
- Wash temperature: 10°C -
- Rinse temperature: 65°C - 87°C
- Wash tank capacity: 120 l
- Boiler capacity: 20 l
- Water consumption/cycle: 7.5 l
- Drainage base maximum height: 218 mm
- Drain diameter: 30 mm

### External dimensions (W x D x H)

- ✓ Width: 1465 mm
- ✓ Depth (closed): 930 mm
- ✓ Depth (open): 1374 mm
- ✓ Height (closed): 2015 mm
- ✓ Height (open): 2330 mm
- Net weight: 368 kg
- Noise level (1m.): 76 dB(A)
- Crated dimensions  
1590 x 1020 x 2190 mm
- Gross weight: 382 kg



SAMMIC, S.L. · Basarte, 1  
20720 AZKOITIA (Gipuzkoa) · SPAIN

product sheet  
updated 17/12/2025




# UTENSIL WASHER UX-1300CV 230-400/50/3N DD

Rack size 1320 mm x 700 mm and door clearance 820 mm. Constant temperature rinsing system. HRS system.



1303548

WARE WASHING  
POT WASHERS

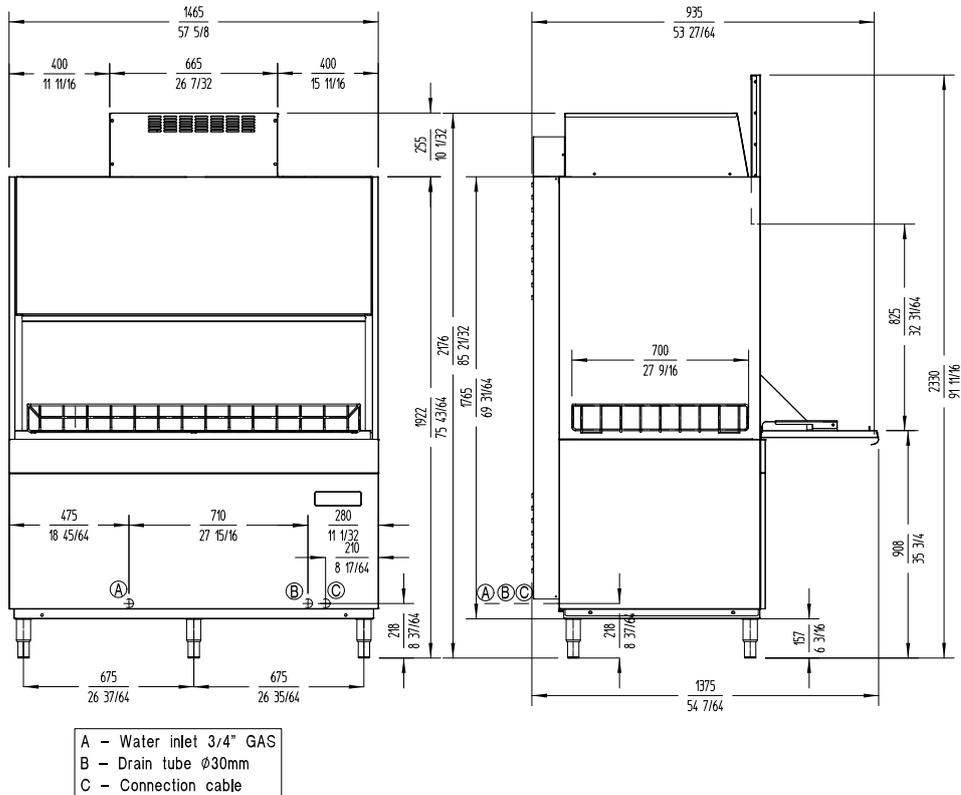

sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road

Troon Industrial Park

LE4 9LS - Leicester

uksales@sammic.com

Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 17/12/2025