

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

HORIZON TOP MOUNT REACH-IN

HR1HC Half-Glass Door Reach-In Refrigerator

Hydrocarbon Series



MODEL:

HR1HC-1HG



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front and continuous coil coated sides
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- · One piece grille
- LED interior light
- Self-closing doors with 120° stay-open feature, on cam-lift hinges
- Snap-in magnetic gaskets for positive door seal
- Three (3) heavy-duty epoxy coated wire shelves
- . 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Tray slide kit #4 (19 sets per half section)
- Additional shelves
- Shelf clips
- Door locks
- · Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option* (see note on back page)

FINISH OPTIONS

HR Standard

(S/S front, continuous coil coated sides, aluminum interior)

(S/S front, S/S sides, aluminum interior)

(S/S front, continuous coil coated sides, S/S interior)

(Complete S/S exterior & interior)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F









3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	HR1HC-1HG	
EXTERNAL DIMENSIONAL DATA		
Width Overall	26"	
Depth Overall with Handle	33 %"	
Height Overall	85"	
Number of Doors	2	
Depth with Door Open 90°	55 ½"	
Door Opening (in)	21 %" x 29 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.28	
Internal Width Overall (in)	22 1/8"	
Internal Depth Overall (in)	26 1/8"	
Internal Height Overall (in)	62"	
Number of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	2.7	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1702	
Heat Rejection (BTU/Hr)	2553	
Charge (lbs/grams/ounces)	0.2425 / 110 / 3.88	
SHIPPING DATA		
Gross Weight (crated lbs)	356 lbs	
Height - Crated	88"	
Width - Crated	33"	
Depth - Crated	41"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Top Mount Reach-In Refrigerator Model: HR1HC-1HG

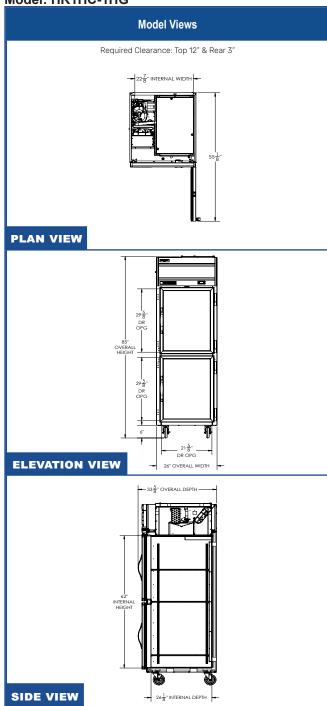



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

