



## HT6 - Silverlink 600 Electric Counter-top Boiling Top - 4 Plates - W 600 mm - 7.0 kW

Designed to fit in perfectly alongside other Silverlink 600 products, whether you're cooking in a care home, cafe, or smaller pub or restaurant, the Electric Boiling Top won't let you down.

- ✓ Designed to fit in perfectly with other equipment in the Silverlink 600 series
- ✓ Automatic power reduction, if pan boils dry or is removed – prolonging hotplate life
- ✓ Six-position switches control each plate
- ✓ Fully pressed and sealed hob tops make the unit easy to clean and maintain

### Specifications

#### Summary

<b>Range Name</b>	Silverlink 600
<b>Power Type</b>	Electric
<b>Unit Type</b>	Counter-top
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN Code</b>	5056105105022

#### Power and Performance

<b>Total Power kW</b>	7.0
<b>IP Rating</b>	IP33
<b>Temperature Control</b>	Mechanical
<b>Rating per Hob kW</b>	2 x 2.0, 2 x 1.5

#### Key Specifications

<b>Number of Hobs</b>	4
<b>Shape of Hob</b>	Round

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	290
<b>Unit Width (External) mm</b>	600
<b>Unit Depth (External) mm</b>	620
<b>Hob Dimensions mm</b>	190
<b>Net Weight Kg</b>	16.2

#### Supply Connections

<b>Requires Installation</b>	Yes
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	No
<b>Requires Hardwiring</b>	Yes
<b>Electrical Supply Rating Watts</b>	7,000
<b>Single Phase Amps</b>	30.4
<b>Single Phase Voltage</b>	230
<b>Three Phase Amps</b>	L1=8.7 ; L2=13.0 ; L3=8.7
<b>Three Phase Voltage</b>	400




#### Shipping

<b>Packed Weight Kg</b>	20.7
<b>Packed Height cm</b>	49.5
<b>Packed Width cm</b>	70
<b>Packed Depth cm</b>	70

### Available Accessories

<b>CC6</b>	Silverlink 600 Free-standing Ambient Open-Top Pedestal with Doors - W 600 mm
<b>CN6</b>	Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 600 mm
<b>HC6</b>	Silverlink 600 Free-standing Heated Open-Top Pedestal with Doors - W 600 mm - 0.5 kW
<b>HCL6</b>	Silverlink 600 Free-standing Heated Pedestal with Legs and Doors - W 600 mm - 0.5 kW
<b>SLS6</b>	Silverlink 600 Free-standing Floor Stand - for units W 600 mm

### Technical Picture

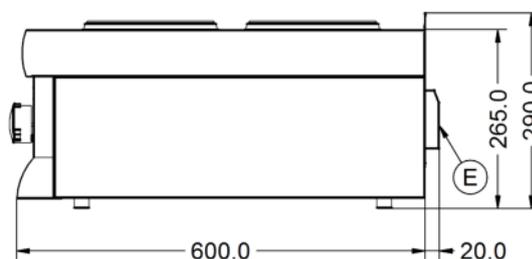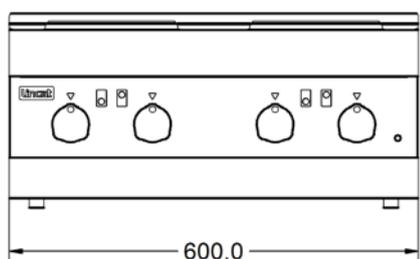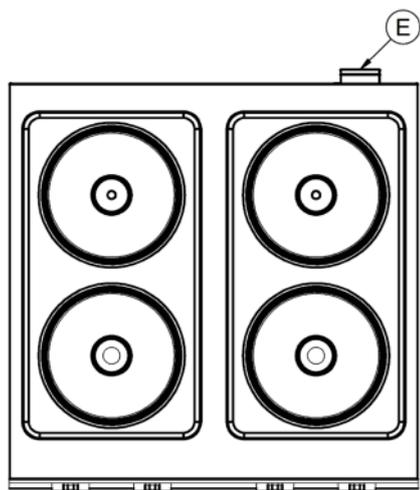

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm