

Culino 300E Combi Jacketed Kettle

Model – Culino Combi 300E (4215242)

FEATURES

- Culino kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Safety grid lid
- Multi-function mixing tool with auto-reverse
- 4 mixing programs
- Hydraulic tilting
- Measuring stick
- Hand shower (option)
- Strainer plate(option)

Please refer to Metos website for options and accessories




TECHNICAL DATA

Net Volume	300L	Electrical	Power 41.5 kW
Spare Volume	33 L		Voltage 400-415V,
Gross Volume	333 L		3P+N+E 50/60Hz
Dimensions			AMP 80A
Width	1560mm	Total Heat	40kW
Height	1039mm	Load	Latent 1.9kW,
Depth	1161mm		Sensible 9.6 kW
Connections		Waste	By kitchen
Water	Cold ø15mm	Nett Weight	420 kg
	Hot ø10mm		

NOTE - Mandatory installation kit required for all installations, options are:

- Single kettle surface – 4215839
- Single kettle subsurface – 4215840
- Group kettle surface – 4215843
- Group kettle subsurface - 4215844

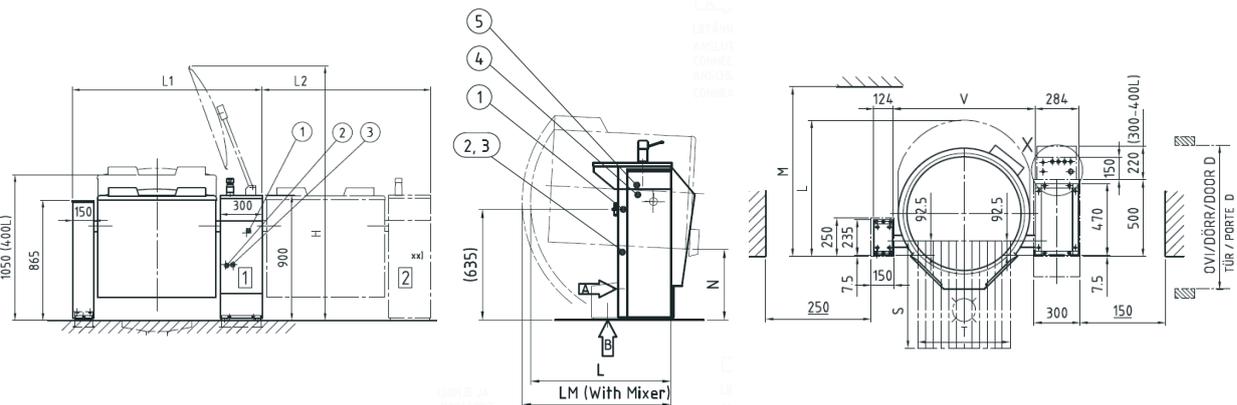

Finland
metos.com/manufacturing

Metos Oy Ab
 Ahjonkaarre
 FI 04220 Kerava
 Finland
 Telephone +358 204 3913
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
300E	1560	1410	1190	1135	1135	2100	800	600	1165	450	1126

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.