

Culino 200E Static Jacketed Kettle

Model – Culino 200E (4215207)

FEATURES

- Culino static jacketed kettle
- Electric heated version
- 316 Stainless steel bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Electric tilting
- Measuring stick
- Hand shower(option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




TECHNICAL DATA

Net Volume 200L
 Spare Volume 19 L
 Gross Volume 219 L
 Dimensions
 Width 1360mm
 Height 1039mm
 Depth 965mm
 Connections
 Water Cold ø15mm
 Hot ø10mm

Electrical Power 30 kW
 Voltage 400-415V,
 3P+N+E 50/60Hz
 AMP 50A
 Total Heat Load 30kW
 Latent 1.4 kW,
 Sensible 6.1 kW
 Waste By kitchen contractor
 Net Weight 270 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
 Single kettle subsurface – 4215840
 Group kettle surface – 4215843
 Group kettle subsurface - 4215844

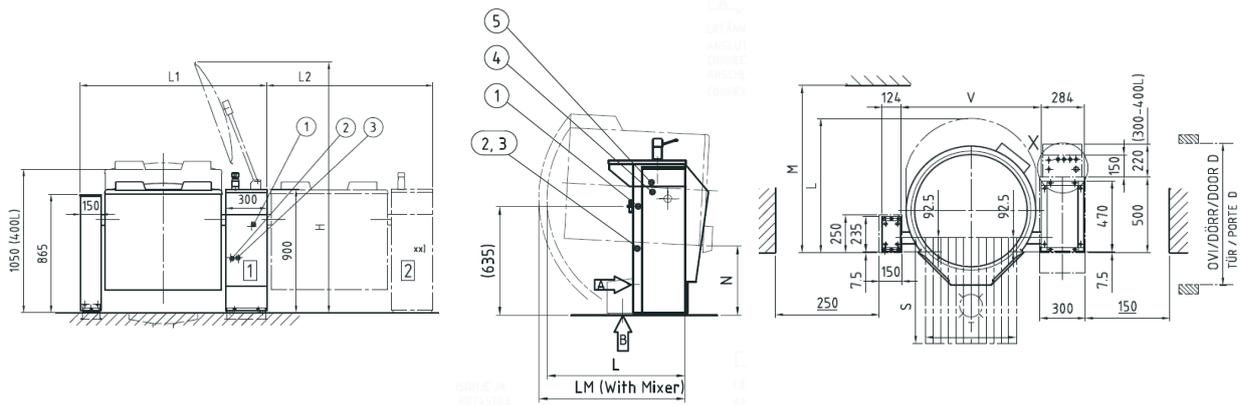

Finland
metos.com/manufacturing

Metos Oy Ab
 Ahjonkaarre
 FI 04220 Kerava
 Finland
 Telephone +358 204 3913
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
200E	1360	1210	1130	895	980	1980	800	600	945	420	926

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.